

Model GF Mesh Grease Filters

GENERAL DESCRIPTION

These filters are designed for use in commercial kitchens and ventilation from food preparation areas where their primary function is to reduce grease carry over from the cooking area.


These Filters are rated at 1.5m/sec - where the pressure drop is 15Pa for 45mm filters and less than 10Pa for 20mm filters.

Construction


These filters are made from rolled channel frames, with safety edges. Sandwiched between the frame edges are layers of interwoven expanded mesh.

These Filters are available in the frame finishes below - mesh choice is either Galvanised Steel or Stainless Steel.


Stainless Steel




Brushed Stainless Steel



Galvanised Steel

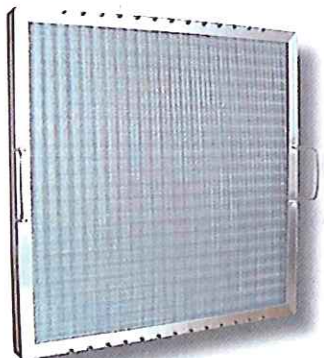

Aluminium

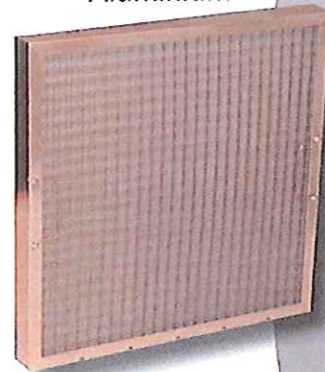

ENVIRONMENT



EMS 81914
BS FN ISO 14001:2004

QUALITY



FM 29257
BS EN ISO 9001:2000

Jasun Filtration Plc
Riverside House, Parrett Way
Bridgwater, Somerset.
TA6 5LB
United Kingdom

Tel.: +44 (0) 1278 452277
Fax: +44 (0) 1278 450873
Info@jfilters.com
Http://www.jfilters.com