



Type 90 Panel Filter

GENERAL DESCRIPTION

The Type 90 panel filter is a disposable product offering a basic level of filtration, or pre-filtration in HEVAC applications.

Construction

This product is constructed by bonding a pad of smartglass fibre into a water repellent AquaKote® card frame

Filter Efficiency to BS EN 779		G3
Filter Thickness	Rated Airflow	Initial Pressure Drop
20mm	1.5m/sec	18Pa
45mm	2.0m/sec	50Pa
Final Recommended Pressure Drop		150Pa

Features

The Frame is made from AquaKote card which has


- Superior tear resistance when wet
- Great dry tear resistance and
- Manufactured from a renewable source.

The Glass Fibre media

- Is made from a recycled products
- Has a graduated density to provide great depth loading of dirt
- Is available any size
- Is Takified to provide improved efficiency
- Is very inexpensive



CROSS SECTION OF THE GLASS FIBRE MEDIA USED IN TYPE 90 PANEL FILTERS

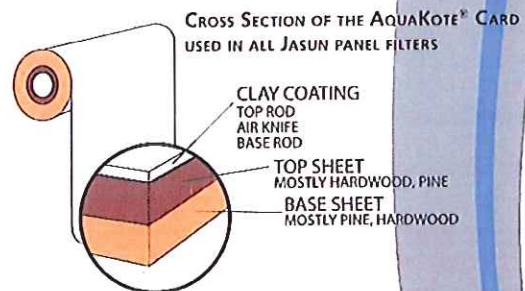

CROSS SECTION OF THE AQUAKOTE® CARD USED IN ALL JASUN PANEL FILTERS



EMS 81914
BS EN ISO 14001:2004



FM 29257
BS EN ISO 9001:2000

Jasun Filtration Plc
Riverside House, Parrett Way
Bridgwater, Somerset.
TA6 5LB
United Kingdom

Tel.: +44 (0) 1278 452277
Fax: +44 (0) 1278 450873
info@jfilters.com
<http://www.jfilters.com>