

LEGEND - 1:200

	Existing tree canopy (Tree to be retained and protected in accordance with B55837, Refer to Barnes Associates report)
	Tree root protection area (Tree to be retained and protected in accordance with B55837, Refer to Barnes Associates report)
	Existing cattle trough to be retained and protected. Refer to engineers details for new pipe work
	Existing bypass pipe to be retained and protected. Refer to engineers/architects proposals.
	Existing reeds to be retained and protected.
	Existing reeds to be removed (consented via Lake planning application N/160/00284/21)
	Existing weir to be demolished. Refer to engineers/architects proposals.
	Proposed timber footbridge. Refer to engineers/architects proposals.
	Proposed turbine for HEP. Refer to engineers proposals.
	Proposed rock ramp. Refer to engineers proposals.
	Extent of excavation required for spillway. Refer to Engineers proposals.
	Extent of area to receive proposed meadow mix.
	Extent of proposed bunding.

Rev	Description	By	Chk	Date
--	First Issue	EV	EG	08.12.23
A	Amended following comments from design team.	EV	EG	23.12.23

NOTES - IF IN DOUBT, ASK


- Do not scale directly from this drawing.
- All dimensions are in metres.
- All levels are shown in metres Above Ordnance Datum (AOD).
- All levels and dimensions are to be checked on site by the site manager/contractor prior to commencing any works or ordering any materials.
- This drawing is to be viewed in conjunction with all other detailed drawings and specifications from all members of the design team.
- Any conflicts/discrepancies are to be highlighted to Southern Green prior to commencing works or ordering any materials.

CDM - SAFETY, HEALTH & ENVIRONMENTAL INFORMATION
Principal Designer: TSA

In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following project specific risks which require attention/ mitigation by the contractor undertaking the works:

Construction: Refer to PCI & hazard elimination and management list
Maintenance/ Cleaning: Refer to PCI & hazard elimination and management list
Decommissioning/ Demolition: Refer to PCI & hazard elimination and management list

It is assumed that all works will be carried out by a competent contractor, working where appropriate, to their own approved method statement. This is not an exhaustive list and reference must be made to the Construction Phase Plan or Health and Safety File and any additional Risk Assessment documents available.

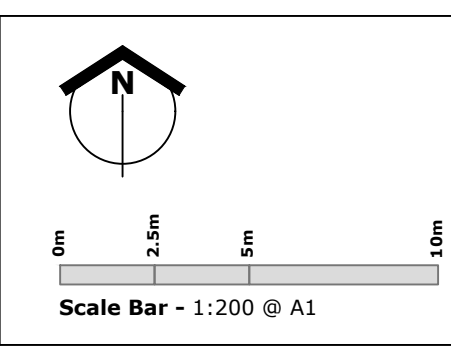

South Orm1040_SOUTH ORMSBY WEIR			
South Ormsby Community Interest Co.Ltd			
Site Clearance			
1040_SOW_100	Rev A		
1:200 @ A1	01.12.23	LN118QS	

Drawing Issue Status

<input type="checkbox"/> Comment/ Approval	<input type="checkbox"/> Contract
<input type="checkbox"/> Costing	<input type="checkbox"/> Construction
<input checked="" type="checkbox"/> Planning	<input type="checkbox"/> Record Dwg
<input type="checkbox"/> Tender	<input type="checkbox"/> BIM

© Copyright and all intellectual property rights remain vested in Southern Green Ltd

SouthernGreen

0191 440 0034
www.southerngreen.co.uk
studio@southerngreen.co.uk