


Schedule of tree works requirements.

- Site address – Orbis, 27 Pendwyallt Road, Cardiff, CF14 7EF
- Cell No – SWA071
- Works – Tree reduction to improve ‘line of site’.

It is recommended that the trees shown in the schedule below and photos are reduced by 2 to 3 metres to achieve the ‘Line of Sight’ (LOS) necessary for the telecom masts to operator efficiently.

The trees are within a TPO group and the necessary permission will be required to carry out the works.

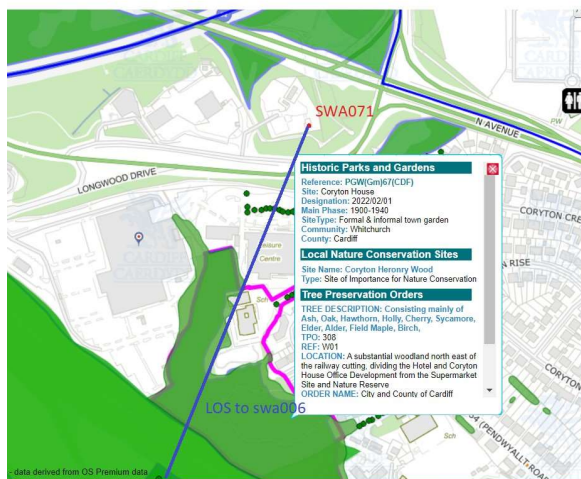

All arising to remain on site and be stacked neatly.

All recommended tree work should be carried out, according to the attached schedule and following BS3998: 2010, by a fully insured, qualified and reputable contractor.

Simon Pearce

Director

Trinkle & Pearce Landscapes

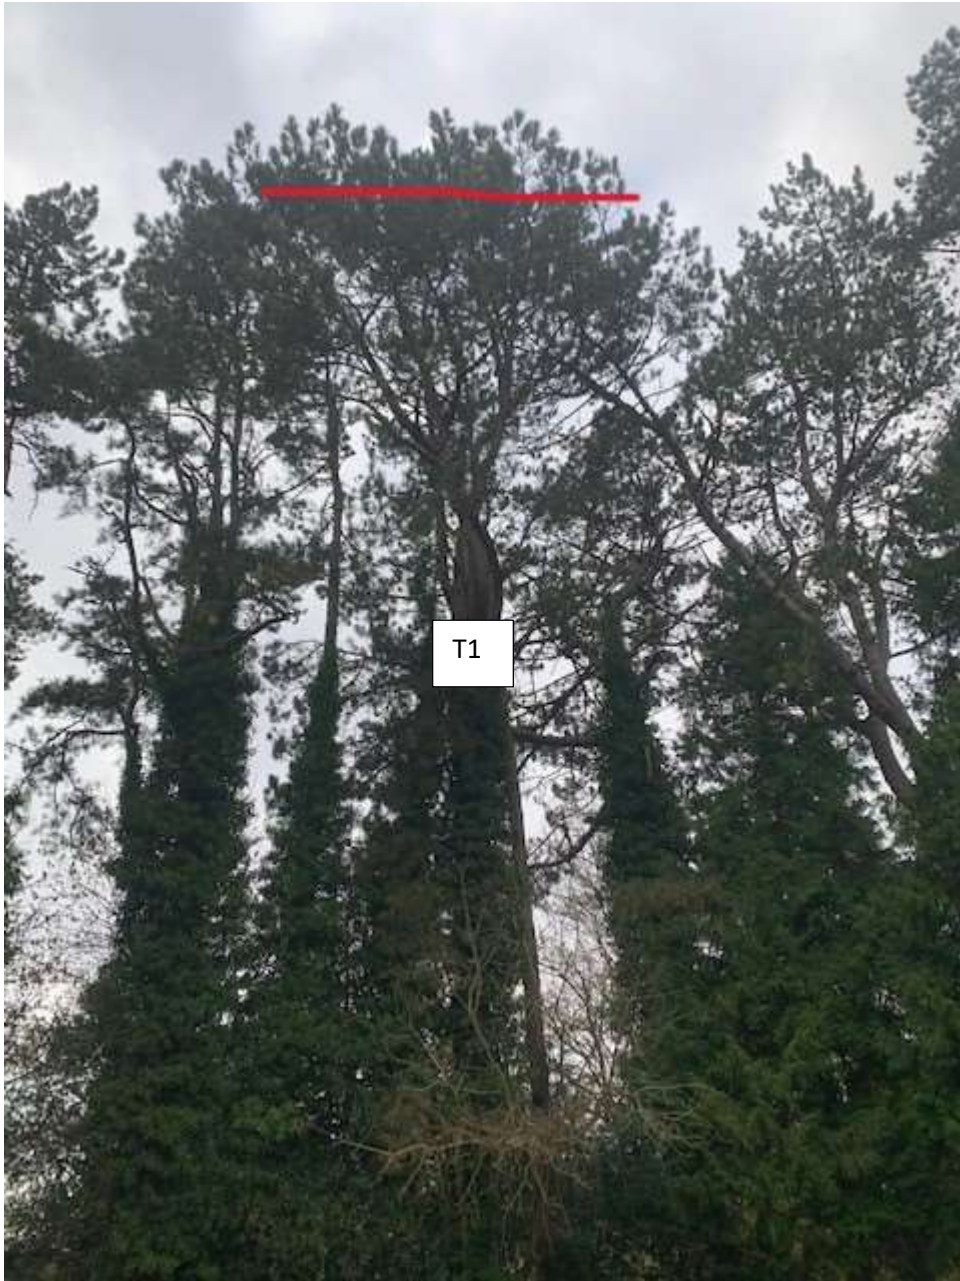


Figure 1 - T1

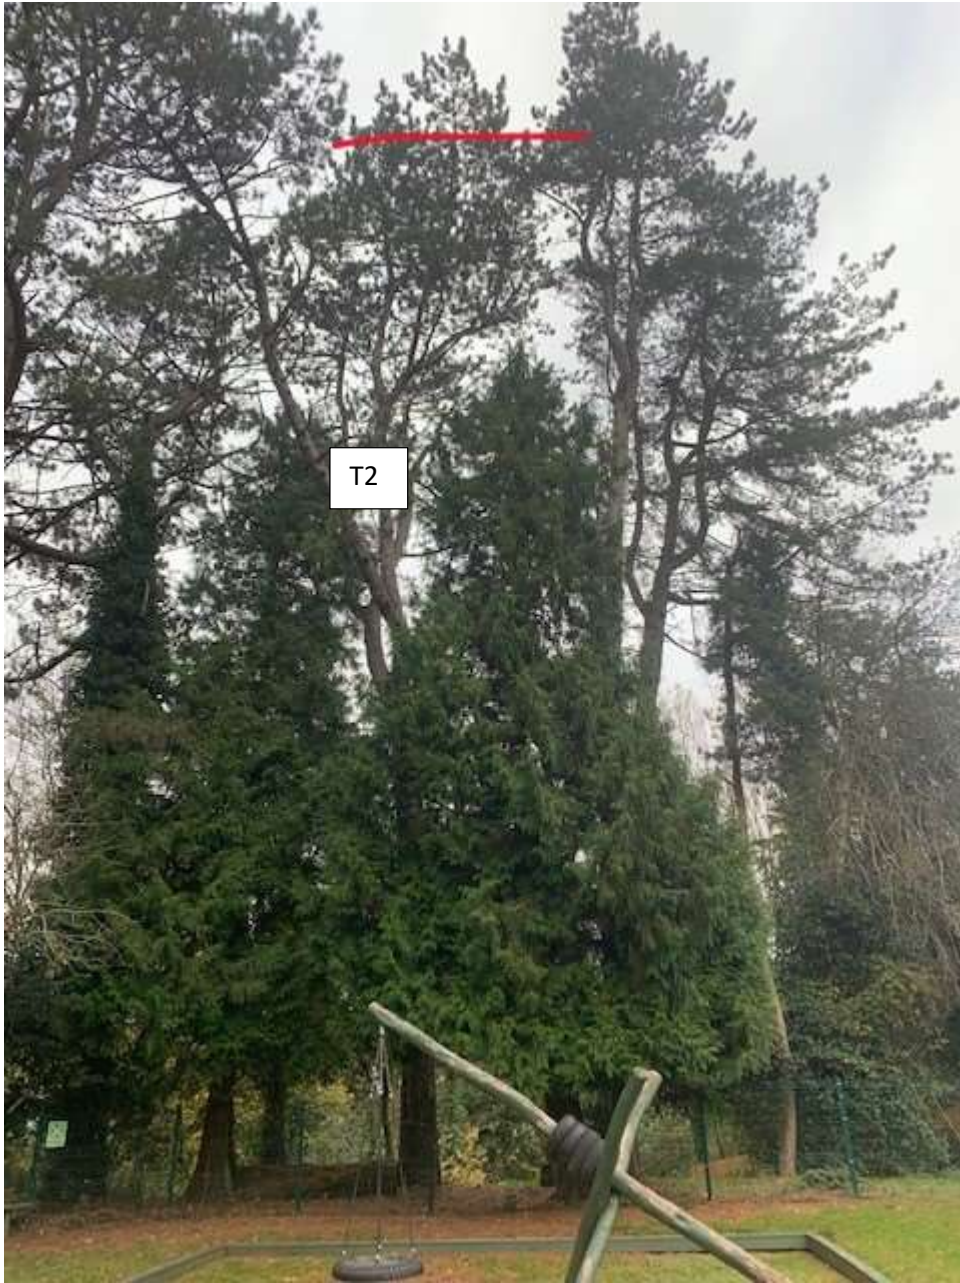


Figure 2 - T2

TREE SURVEY-SCHEDULE

SITE REF: ORBIS

DATE: 17/11/2023

TREE NO/ GROUP/ HEDGE	TREE/SHRUB SPECIES	HEIGHT APPROX M	STEM DIAMETER MM	SPREAD APPROX M N,S,E,W	HEIGHT 1ST BRANCH/ CANOPY	LIFE STAGE Y, SM, M, OM	PHYSIOLOGICAL /STRUCTURAL CONDITION G,F,P,D	ESTIMATED REMAINING YEARS	TREE CATEGORY	NOTES
1 #	Pinus sylvestris E314039 N181214	25M+	600	10	15	M	F	20+	B2	REDUCE 2/3M
2 #	Pinus sylvestris E314039 N181204	25M+	800	12	15	M	F	20+	B2	REDUCE 2/3M