



Measurement condition
PUMY-SP112, 125, 140VKM(-BS)
PUMY-SP112, 125, 140YKM(-BS)

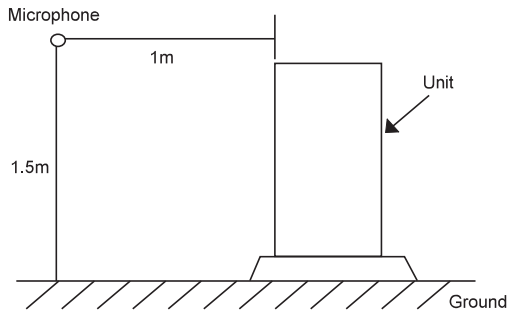


Sound level of PUMY-SP140VKM, YKM(-BS)

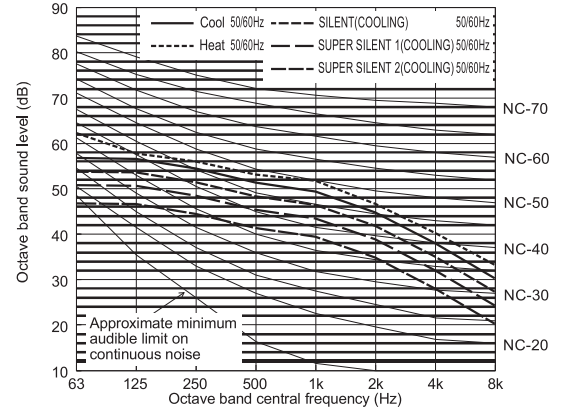

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard Cooling	50/60Hz	56.8	56.6	54.5	51.3	49.4	44.8	38.0	30.3	54.0
Standard Heating	50/60Hz	62.3	57.8	56.1	53.1	51.8	46.7	40.3	33.2	56.0
SILENT(COOLING)	50/60Hz	53.8	53.6	51.5	48.3	46.4	41.8	35.0	27.3	51.0
SUPER SILENT 1(COOLING)	50/60Hz	50.8	50.6	48.5	45.3	43.4	38.8	32.0	24.3	48.0
SUPER SILENT 2(COOLING)	50/60Hz	46.8	46.6	44.5	41.3	39.4	34.8	28.0	20.3	44.0

When Silent/Super Silent1/Super Silent2 mode is set, the A/C system's capacity is limited. The system could return to normal operation from Silent/Super Silent1/Super Silent2 mode automatically in the case that the operation condition is severe.


Sound level of PUMY-SP112VKM, YKM(-BS)

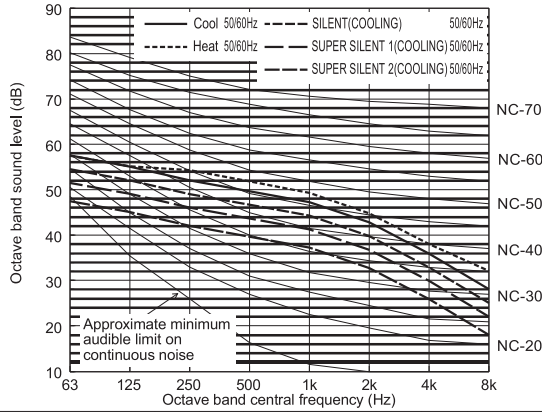

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard Cooling	50/60Hz	57.5	55.1	52.0	49.6	47.3	42.8	35.9	28.1	52.0
Standard Heating	50/60Hz	57.4	55.1	54.3	51.8	49.3	44.8	38.0	32.1	54.0
SILENT(COOLING)	50/60Hz	54.5	52.1	49.0	46.6	44.3	39.8	32.9	25.1	49.0
SUPER SILENT 1(COOLING)	50/60Hz	51.5	49.1	46.0	43.6	41.3	36.8	29.9	22.1	46.0
SUPER SILENT 2(COOLING)	50/60Hz	47.5	45.1	42.0	39.6	37.3	32.8	25.9	18.1	42.0

When Silent/Super Silent1/Super Silent2 mode is set, the A/C system's capacity is limited. The system could return to normal operation from Silent/Super Silent1/Super Silent2 mode automatically in the case that the operation condition is severe.

Sound level of PUMY-SP125VKM, YKM(-BS)

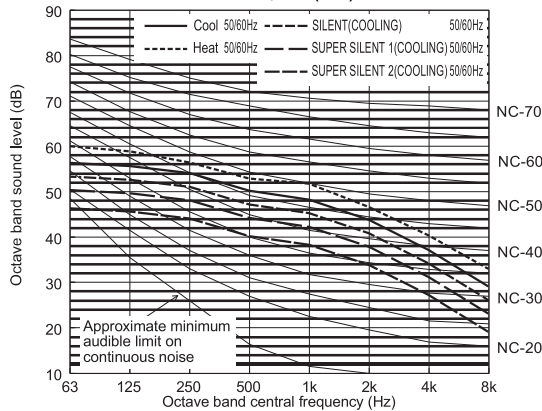

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard Cooling	50/60Hz	56.3	55.6	54.1	50.2	48.3	43.8	37.2	29.1	53.0
Standard Heating	50/60Hz	60.0	58.9	56.4	52.9	51.8	46.6	40.3	33.0	56.0
SILENT(COOLING)	50/60Hz	53.3	52.6	51.1	47.2	45.3	40.8	34.2	26.1	50.0
SUPER SILENT 1(COOLING)	50/60Hz	50.3	49.6	48.1	44.2	42.3	37.8	31.2	23.1	47.0
SUPER SILENT 2(COOLING)	50/60Hz	46.3	45.6	44.1	40.2	38.3	33.8	27.2	19.1	43.0

When Silent/Super Silent1/Super Silent2 mode is set, the A/C system's capacity is limited. The system could return to normal operation from Silent/Super Silent1/Super Silent2 mode automatically in the case that the operation condition is severe.

PUMY-SP-VKM, YKM/PUMY-P-VKM4, YKME14, YKM2