



PUMY-P-VKM5, YKM(E)4, YKM2, YBM

Measurement condition
 PUMY-P200YKM2(-BS)
 PUMY-P250YBM(-BS)
 PUMY-P300YBM(-BS)

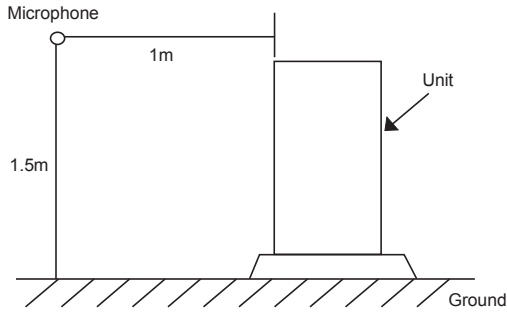


Sound level of PUMY-P250YBM

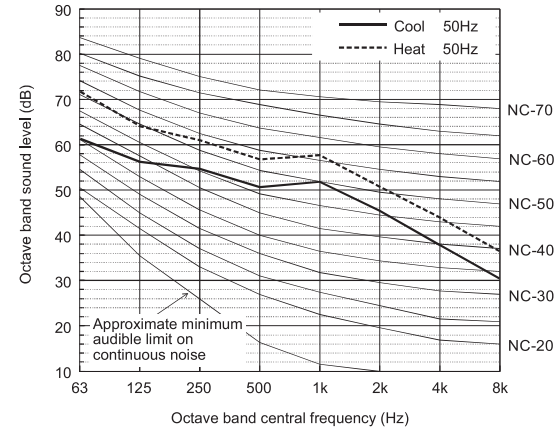

| | | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 8k | dB(A) |
|------------------|-------|------|------|------|------|------|------|------|------|-------|
| Standard Cooling | 50 Hz | 61.3 | 56.2 | 54.7 | 50.7 | 51.8 | 45.5 | 37.8 | 30.4 | 55.0 |
| Standard Heating | 50 Hz | 71.8 | 64.1 | 61.0 | 56.8 | 57.7 | 50.8 | 43.9 | 36.5 | 61.0 |

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUMY-P200YKM2

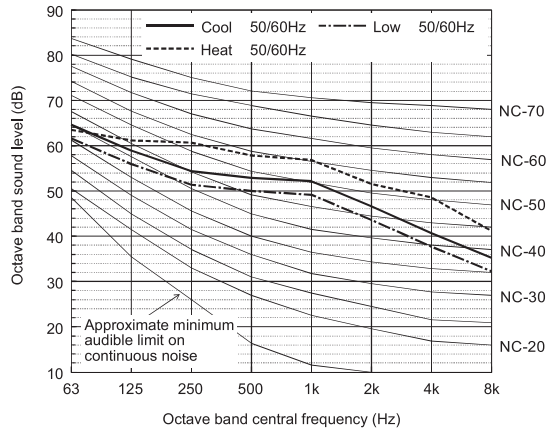

| | | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 8k | dB(A) |
|------------------|---------|------|------|------|------|------|------|------|------|-------|
| Standard Cooling | 50/60Hz | 64.6 | 58.9 | 54.4 | 53.0 | 52.1 | 46.6 | 40.7 | 35.3 | 56.0 |
| Standard Heating | 50/60Hz | 63.4 | 61.2 | 60.7 | 57.8 | 56.9 | 51.6 | 48.6 | 41.1 | 61.0 |
| Low noise mode | 50/60Hz | 61.6 | 55.9 | 51.4 | 50.0 | 49.1 | 43.6 | 37.7 | 32.3 | 53.0 |

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUMY-P300YBM

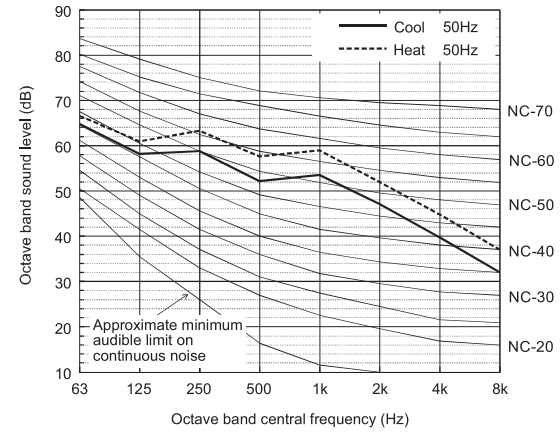

| | | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 8k | dB(A) |
|------------------|-------|------|------|------|------|------|------|------|------|-------|
| Standard Cooling | 50 Hz | 64.7 | 58.1 | 58.7 | 52.1 | 53.5 | 47.0 | 39.7 | 32.0 | 57.0 |
| Standard Heating | 50 Hz | 66.5 | 60.9 | 63.2 | 57.5 | 58.9 | 51.9 | 44.8 | 37.0 | 62.0 |

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.