

# HERITAGE

FLUSH COLLECTION

BY DECEUNINCK

**Heritage Flush Collection**  
Beautiful living spaces


**deceuninck**








# Make the most of your home inside and out - Heritage Flush Window

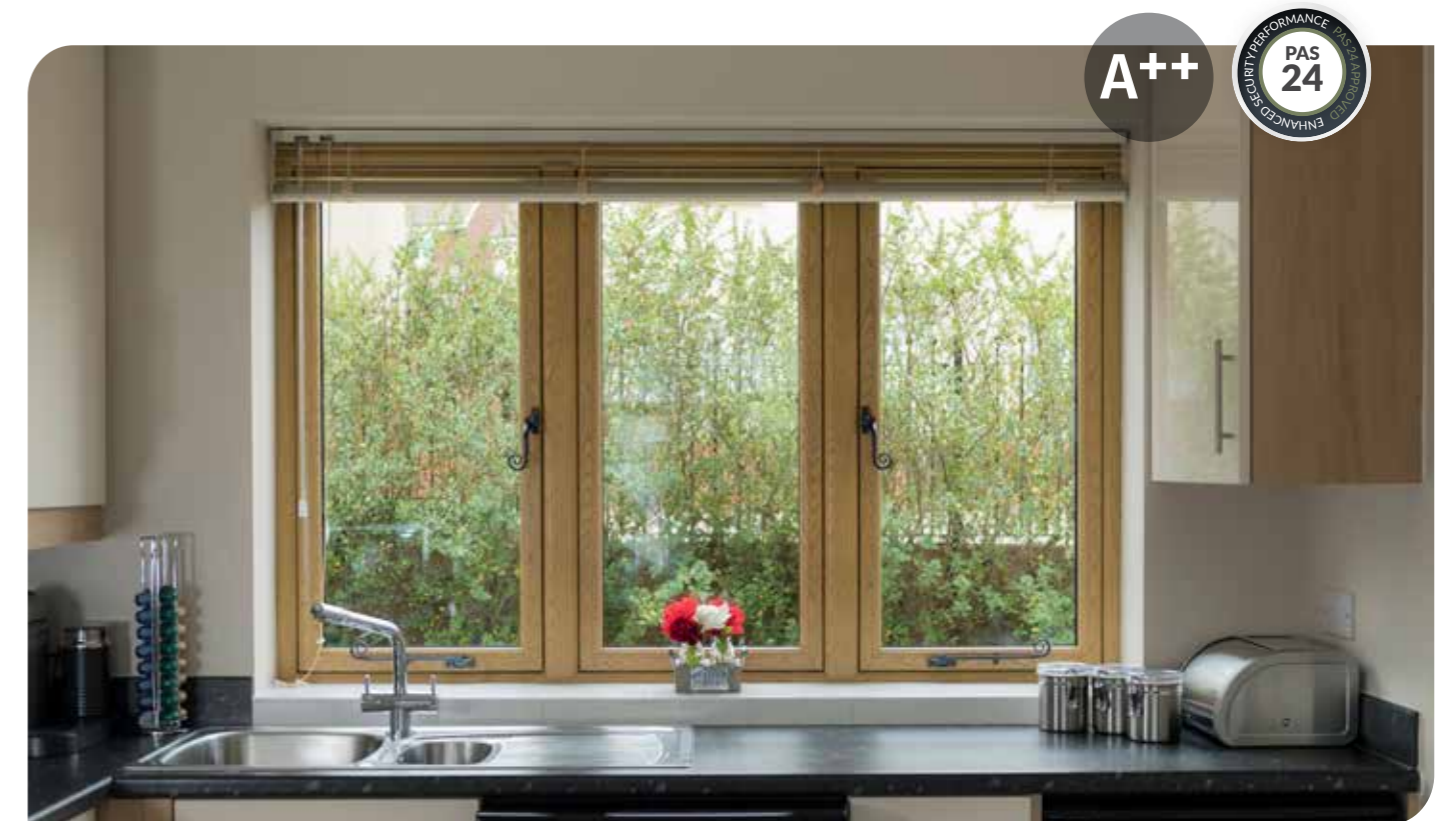Our Heritage Flush Window combines the beauty and elegance of traditional timber with all the benefits of PVC-U. The Heritage Flush Window makes a stunning addition to both traditional and contemporary properties, transforming period homes, country cottages and modern townhouses. Its unrivalled, aesthetic appeal makes it one of the most attractive windows on the market today.



## Key features

- ✓ Sleek slimline frames
- ✓ Dummy peg stay option
- ✓ Traditional butt or mitred joint
- ✓ Exquisite Georgian bar option
- ✓ Unique night vent facility
- ✓ Traditional ironmongery options
- ✓ High energy rating and weather performance
- ✓ Enhanced security PAS 24 Approved
- ✓ Double or triple glazing available
- ✓ Double glazed  $U_w$  1.2, triple glazed  $U_w$  0.90
- ✓ Low maintenance PVC-U frames
- ✓ Available in a range of hand-picked Heritage woodgrain finishes

WEATHER TEST RESULTS		Top Hung Casement (Flush Sash Only)	Side Hung Casement (Flush Sash Only)
	Size Tested	1.2m x 1.2m	0.7m x 1.4m
 Air Permeability	Class	A4	A4
	Rating	600 Pa	600 Pa
 Water tightness	Class	E900	E900
	Rating	900 Pa	900 Pa
 Wind Resistance	Class	AE	AE
	Rating	2400 Pa	2400 Pa



UNIQUE NIGHT VENT FACILITY

DOUBLE AND TRIPLE GLAZING

MULTIPOINT LOCKING



AUTHENTIC PEG STAY OPTION

TRADITIONAL BUTT OR MITRED JOINT

MATCHING TRIMS & ACCESSORIES

A++

SUPERB ENERGY RATINGS

FLUSH EXTERNAL CONTOURS

# HERITAGE

FLUSH COLLECTION

BY DECEUNINCK

Heritage Flush Windows look great in any surrounding; modern townhouse or country cottage. They will retain their elegance while still functioning as a high quality window for many years to come.



**Super Efficient**  
Compared with aluminium or wood, PVC-U windows are low maintenance, have better insulation values and are able to reduce energy and heating costs.



**Perfect for Conservation**  
Flush external contours are in keeping with period properties and also meet the requirements of most conservation area officers. \*Check with your planning/conservation officer.



**Sound-Proof**  
Glazing options to maximise energy efficiency and/or sound proofing.



**Safe and Secure**  
For total peace of mind, our Heritage Flush Windows come with multi-point locking as standard.

HERITAGE FLUSH WINDOW



# Heritage Flush Door

Complementing the award winning Flush Window, the Heritage Flush Door will provide your home with the kind of timeless style and beauty you would expect from a market-leading product. #BestInClass performance means there is substance to match that style, giving you long-lasting peace of mind. With their 19th century charm and 21st century attributes, our stunning Heritage flush windows and doors will transform your property into the home you have always dreamed of.



## Key features

- ✓ Imitates the aesthetics of a timber door
- ✓ Designed in line with the award winning Flush Window (G17 New Product of the Year)
- ✓ Dedicated sash profile
- ✓ Dedicated PAS24 approved hardware system:
- ✓ #BestInClass double & single door weather performance:
  - Air Permeability - Class 4 600 Pa
  - Water Tightness - Class E1050 Pa
  - Wind Resistance - Class A3 1200 Pa
- ✓ Doorset energy rating A
- ✓ Double glazed  $U_d$  1.3, triple glazed  $U_d$  1.0
- ✓ 30 colourways from stock
- ✓ The ideal alternative to aluminium

# HERITAGE COLOUR COLLECTION

## Premium woodgrain foils available in 30 Colourways from stock

Our Heritage colour collection has been specially designed to help you put together the perfect colour palette for your home. Our beautiful range of colours take inspiration directly from nature to harmonise perfectly with your home and its surroundings, ensuring it stays looking good for years to come.



### The Heritage Colour Collection

- 30 Colourways from stock
- Option of English Oak and White Woodgrain on the outside; or English Oak inside and outside
- Extremely durable
- A minimum 10 year manufacturer's guarantee for ultimate peace of mind



# 30 COLOURWAYS IN STOCK

**Heritage Colour Range** - Surcharge applies.

The grid displays 30 color swatches arranged in 5 rows and 6 columns. Each swatch shows a diagonal split between the color and white PVC. The colors include various shades of woodgrain (English Oak, Golden Oak, Irish Oak, Rosewood, Nut Tree), solid colors (Anthracite, Black Ash, Agate Grey, Chartwell Green, Classic Cream, Ice Cream, Grey Aluminium), and combinations (Heritage White, White Grain).

A unique range of woodgrain foil colours in 30 colourways in stock, complete with matching ancillaries, trims and accessories.

Colour	Nearest RAL	Renolit Reference	Colour	Nearest RAL	Renolit Reference
Heritage White	RAL 9003	Renolit Ref. S30.30.70.0010	White PVC	RAL 9016	Renolit Ref. N/A
Ice Cream	RAL 9001	Renolit Ref. S30.30.70.0019	White Grain	RAL 9010	Renolit Ref. S30.30.70.0005
Agate Grey	RAL 7038	Renolit Ref. S30.30.70.0038	Classic Cream	RAL 9001	Renolit Ref. S30.30.70.0006
Smooth Anthracite	RAL 7016	Renolit Ref. S30.30.10.0249	Chartwell Green	RAL N/A	Renolit Ref. S30.30.10.0224
Black Ash	RAL 8022	Renolit Ref. S30.30.10.0078	Irish Oak	RAL N/A	Renolit Ref. S30.30.11.0109
English Oak	RAL N/A	Renolit Ref. S30.30.11.0044	Golden Oak	RAL N/A	Renolit Ref. S30.30.11.0031
Anthracite Grey	RAL 7016	Renolit Ref. S30.30.10.0054	Rosewood	RAL N/A	Renolit Ref. S30.30.11.0059
Anthracite Smooth Matt	RAL 7016	Renolit Ref. S30.30.70.0065	Nut Tree	RAL N/A	Renolit Ref. S30.30.11.0033
Grey Aluminium	RAL N/A	Renolit Ref. 02.20.76.000004	Black Smooth Matt	RAL N/A	Renolit Ref. S30.30.70.0059

# Window Handle options

## Teardrop Handle



## Monkey Tail Handle




## Traditional Peg Stays

## Connoisseur Handle



# Glass options

There are a wide range of glass effects from which you can choose to closely match the pattern you prefer. All our Heritage glass options are available toughened or laminated for your security and safety.

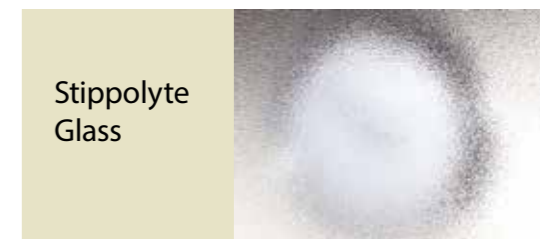

## Leaded and Georgian

The design of your Heritage windows and doors have a big impact on the overall appearance of your home. Whatever the age of your property, the original windows and doors were designed to harmonise with it. So it's important to consider what will look right for the building when you replace them. The right design and look can preserve or enhance the value of your home.



Square Leaded



Diamond Leaded



Internal Georgian Bars



External Georgian Bars



**deceuninck**

BUILDING A  
SUSTAINABLE HOME

**YOUR LOCAL DECEUNINCK DEALER**

**deceuninck**

Deceuninck Limited • Stanier Road • Porte Marsh • Calne • Wiltshire SN11 9PX  
T +44 (0)1249 816 969 • [deceuninck.ltd@deceuninck.com](mailto:deceuninck.ltd@deceuninck.com) • [www.deceuninck.co.uk](http://www.deceuninck.co.uk)

B-08/2020-85669-8104 - The content of this document, photographic reproduction and technical details remain the sole property of Deceuninck UK, all rights reserved. It cannot be reproduced, in whole or in part, without explicit permission. All information is correct at the time of publication. However, Deceuninck reserve the right to alter any information as deemed necessary, at any time. Terms and conditions of sale apply, a copy of which is available on request.