


Arboricultural report – trees at proposed cabins site – Empshill Farm, Farmington, Gloucestershire GL54 3ND.

Report dated 21st June 2023

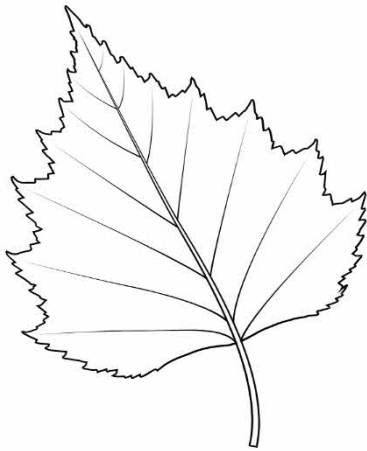

Birch

Independent professional tree woodland and environmental land management – Chartered Foresters, Chartered Surveyors

07970 882140 treesandwoods777@gmail.com

Contents

Summary – key points in overview

1.0 Introduction

2.0 The Site

3.0 Tree Survey condition assessment, tree risk management, work recommendations

4.0 Design Advice, Arboricultural Method Statement & Tree Protection

5.0 Recommendations

6.0 Limitations & Qualifications

Appendix 1 (attached) Schedule of trees

Appendix 2 Tree layout – indicative only (attached)

Appendix 3 Tree images

Appendix 4 Protective fencing for trees as recommended in BS5837:2012

Arboricultural report – trees at proposed cabin site – Empshill Farm, Farmington, Gloucestershire GL54 3ND.

Summary – key points in overview

The trees and hedges assessed in this report are located at the edge of a plantation woodland block located just north of the farm complex at Empshill Farm. Tree assessment and reporting has been undertaken to inform proposed siting and subsequent installation of two cabins at the southern edge of the woodland block. Schedule of trees at Appendix 1(attached) details individual or group assessments and recommendations for the trees and hedges.

The need to manage the trees appropriately to address potential risk issues in relation to their immediate surroundings is discussed.

Recommendations are made for tree management to address risk issues and to facilitate cabin siting by selective felling of trees showing significant decline and risk profiles due to ash dieback (ash) or environmental stress (spruce).

Recommendations are made for conservation and protection of viable older trees and established hedgerows as valuable biodiversity and landscape features. Proposals are made to protect these features and their Root Protection Areas (RPAs) using the guidelines outlined in BS5837:2012.

Suggestions are made for supplementary planting of locally-native tree and shrub species to reinforce existing hedgerow structure and create a resilient, attractive and biodiverse setting for future cabin development at the location.

1.0 Introduction

1.1 Terms of Reference

1.1.1 Birch has been commissioned by Arbor Vitae to prepare an arboricultural report that considers the condition of trees and hedges at Empshill Farm in relation to the proposed siting of two woodland cabins.

A copy plan was supplied to illustrate existing and proposed layout in relation to the trees.

1.1.2 Site assessment and field survey was carried out on 10th June 2023 by the report author. Qualitative and quantitative tree data were recorded in order to assess the condition of the trees and digital photos were taken – see Appendix 1 for Tree Schedule and Appendix 3 for selected images.

1.1.3 Note that any references to tree location/position in this report are indicative and descriptive only, as indicated in Appendix 2, with annotation on a plan supplied by the clients development agents.

1.2 Scope of Works

1.2.1 The assessment of the trees and any other factors are of a preliminary nature. The trees were inspected on the basis of the Visual Tree Assessment (VTA) method as developed by Mattheck and Breloer (1994) and Mattheck (2007). The trees were inspected from ground level with no climbing inspections undertaken. It is not always possible to access every tree and as such some measurements may have to be estimated. No samples have been removed from the site for analysis. The survey does not cover the arrangements that may be required in connection with the removal of existing underground services.

1.2.2 An intrinsic part of tree inspection in relation to development or built environment is the assessment of risk associated with trees in close proximity to persons and property. Most human activities involve a degree of risk with such risks being commonly accepted, if the associated benefits are perceived to be commensurate.

In general, the risk relating to trees tends to increase with the age of the trees concerned, as do the environmental benefits. It will be deemed to be accepted by the client that the formulation of the recommendations for all tree management will be guided by the cost-benefit analysis (in terms of amenity) of the tree work.

1.2.3 This assessment and report does not refer to ecological or protected species elements or issues associated with trees, tree groups or hedges. If required these should be the subject of separate professional assessment and reporting processes for the proposed development.

2.0 The Site

2.1 Overview

2.1.1. The site is a woodland plantation of ash and Norway spruce, located north of the main farm estate and buildings at Empshill Farm. It is framed to the western and southern/south-eastern edges by a well-established native species hedge with hedgerow trees, mostly ash.

2.2 Soils

2.2.1 Landis (<http://www.landis.org.uk/soilscapes/>) describes the typical local soil types here as;

Soilscape 3: Shallow lime-rich soils over chalk or limestone Texture: loamy

No specific soil sampling was done as part of this survey.

2.2.2 The description given was obtained from observation of likely soil types. By definition, this information is not comprehensive and therefore any decisions taken with regards the management, usage or construction on site should be based on a specific and detailed soil analysis. This report provides no information on soil shrinkability. It will be necessary for practitioners in other disciplines (e.g. engineers considering foundation design) to obtain this and other relevant data as required.

2.3 Statutory Tree Protection

2.3.1 No specific check has been made to confirm whether Tree Preservation Orders (TPOs) or Conservation Area designations are in place at this location.

3.0 Tree Survey condition assessment , tree risk management and work recommendations

3.1 The trees were assessed from ground level only. The assessment details for individual tree work recommendations (where considered necessary), are shown in the attached Appendix 1 Schedule of Trees and tree and hedge images are shown in Appendix 3.

Root Protection Areas (RPAs) for the trees and hedges are included in Appendix 1 Schedule of trees.

3.2 Condition Assessment and Work Recommendations

3.2.1 The site is effectively framed by a chevron or v-shaped hedge layout of about 3-3.5 m. height, comprising a mix of native species including hawthorn, blackthorn and field maple, with occasional dogwood and elder . These hedge sections (shown as H1 and H2) are sound and represent good habitat, landscape and aesthetic features.

These hedge sections H1 and H2 should be retained, protected during any development on site and where gaps occur they can be planted up with matching species.

Within the hedges are groups of poor quality ash (shown as G1, G2 and G3) showing clear and advanced symptoms of ash dieback.

It is recommended that these ash are selectively felled and replaced with more resilient hedgerow tree species such as small-leaved lime, wild cherry and field maple.

At G4 the declining/dead spruce and declining ash are not viable for retention in a small-scale development situation, presenting unacceptable levels of risk.

It is recommended that these trees are felled and replaced with locally-native species of trees and shrubs such as field maple, wild cherry and dogwood.

T1 hawthorn is located at the southern apex of the hedge chevron – it is sound and a valuable habitat, landscape and aesthetic feature. It should be retained and protected during any development on site.

T2 ash – an overmature hedgerow ash with many old-growth features, some ash dieback symptoms and typical defects for a tree of its age and type. High habitat and landscape value and an owl box (apparently active) on its south facing lower stem.

Retain and protect T2 during development on site and use the recommended supplementary planting in hedgerow sections G2 and G3 to create medium-term ‘replacements’ for the tree as it continues to age.

3.3 Risk management

3.3.1 The condition and location of declining ash trees in G1, G2 and G3 and spruce/ash in G4, in relation to track corridors, paths and well-used farm facilities and the level of pedestrian footfall/vehicle movements in the vicinity, create significant and unacceptable risk issues. These risk issues warrant tree removal and replacement with local-native, resilient alternative species.

In addition to professional arboricultural work to address existing tree condition and risk management issues, all trees at the site should in future be subject to annual inspection by a suitably qualified and experienced professional. Higher risk zones such as road, track or path corridors, parking areas etc. should be the focus of particular attention in applied tree risk management work.

4.0 Design Advice, Arboricultural Method Statement & Tree Protection

4.1 Securing of Tree Structure and Root Protection Areas (RPA)

4.1.1 The trees and hedges to be retained will be protected by excluding wheeled/tracked vehicle movements and development activities from within the tree and hedge Root Protection Areas (RPAs). The site project manager should ensure that the access restrictions are

discussed, confirmed and recorded as understood by all contractors/machine operators/sub-contractors involved in any future project work on site.

4.1.2 Fencing to the guidelines recommended in BS5837:2012 should be installed before any development work commences on site to protect tree and hedge RPAs. See Appendix 4 for typical protective fencing type and specification.

4.2 On Site Storage of Spoil and other materials

4.2.1 Prior to and during all construction works on site, no spoil or construction materials will be stored within the RPA of any tree or hedge. This is to prevent compaction of the roots of the trees. Any encroachment within this protected area will only be with the prior agreement of the LPA.

4.2.2 Any facilities for the storage of oils, fuels or chemicals shall be sited on impervious bases and surrounded by impervious bund walls and located away from the worksite so that any potential spillage can be contained and soil/water contamination prevented. The volume of the bund compound shall be at least equivalent to the capacity of the tank plus 10%. If there is a multiple tankage, the compound shall be at least equivalent to the capacity of the largest tank, or the combined capacity of interconnected tanks, plus 10%. All filling points, vents, gauges and sight glasses shall be located within the bund. The drainage system of the bund shall be sealed with no discharge to any watercourse, land or underground strata. Associated pipework shall be located above ground and protected from accidental damage. All filling points and tank overflow pipe outlets shall be detailed to discharge downwards into the bund.

4.2.3 All material storage facilities and work areas must consider the effects of sloping ground on the movement of potentially harmful liquid spillages towards or into tree or hedge RPAs.

4.3 Levels

4.3.1 No alterations to soil levels within the RPA of retained trees are envisaged. However, if it is necessary for these to occur, appropriate measures must be taken to prevent or minimise any detrimental effects on the affected root systems.

4.3.2 If it is necessary to excavate so close to trees that roots greater than 50mm diameter are likely to be encountered, particular care will be taken to avoid damage. Excavation in these

areas will be undertaken by hand or using an air spade, avoiding any damage to the bark. The roots will be surrounded with clean sharp sand, prior to the replacing of any soil or other material in the vicinity.

4.3.3 If it is necessary to raise levels, it is essential that adequate supplies of water and oxygen continue to pass through the soil to the trees' roots. Therefore, where necessary, a granular material will be used which will not inhibit gaseous diffusion. Possible options are clean no-fines gravel, cobbles or, Type 2 road-stone.

4.4 Programme of Works

4.4.1 All necessary tree surgery works, once approved by the LPA, will be carried out prior to any other site works.

4.5 Tree Surgery

4.5.1 Any necessary tree work will be agreed with the LPA and will be carried out in line with BS 3998:2010 *Recommendations for Tree Works*. An appropriately qualified, experienced and insured professional arboricultural contractor should carry out the work. Any alterations to the proposed schedule of works will be agreed with the LPA prior to commencement of works.

4.6 Services

4.6.1 At the time of report writing, no details on proposed services were available. However, the following principles should be adhered to when planning for their routing and installation.

4.6.2 It is proposed that all underground service runs will be placed outside the RPA of the trees on or adjacent to the site. Where it is not possible to do this, the proposed length infringing the RPA will be hand dug 'broken trenches' (NJUG 4 paragraph 4) to ensure the maximum protection of the trees' roots. The trenches may also be excavated using an air spade, or trenchless technology can be employed if this methodology is considered appropriate by the relevant service company (thus allowing services to pass below and through the roots without the need for traditional excavation). If it is necessary to cut any small roots as part of any of these processes, they should be severed in such a way as to ensure that the final wound is as small as possible and free from ragged, torn ends.

4.6.3 All service providers (Statutory Authorities) will be consulted prior to commencement of works with the aim of minimising the number of service runs on the site.

4.6.4 All service runs/trenches where they encroach within the RPA of retained trees will be agreed with the LPA prior to commencement of works.

4.7 Reporting and Monitoring Procedures

4.7.1 In accordance with item 6.3 of BS 5837:2012, the site and associated development should be monitored regularly by a competent Arboriculturalist to ensure that the arboricultural aspects of the planning permission (e.g. the installation and maintenance of protective measures and the supervision of specialist working techniques) are implemented. Furthermore, regular contact between the Site Manager and the Arboriculturalist allows them to effectively deal with and advise on any tree related problems that may occur during the development process. This system should be auditable.

5.0 Recommendations

5.1 As and when detailed plans for construction are determined and produced, full consideration should be given to the tree conservation and protection measures detailed above in 3.0 and 4.0. It may be prudent and necessary to consult a competent arboricultural authority to assess any relevant issues as they potentially arise during further project development and realisation .

5.2 Any tree works proposed as part of this assessment are recommended to mitigate any identified risks to people and property and to conserve trees wherever feasible and appropriate. To this end, should these recommendations be overruled, this survey stands as the opinion of Birch Tree, Woodland and Environmental Land Management and therefore any damage or injury caused by trees recommended by this practice for felling or tree surgery works, to which the proposed schedule of works has been altered or the tree has been requested to be retained by the local planning authority or other institutions or individuals, cannot be the responsibility of this practice. Equally, if tree conservation and protection

measures detailed in the report are not followed, this practice will not be responsible for implications or consequences that may result.

5.3 It is recommended that all trees at the site should be the subject of an annual inspection and check for condition and risk management purposes, by a suitably qualified and experienced professional. Higher risk zones such as track or path corridors should be the focus of particular attention in applied tree risk management work.

6.0 Limitations & Qualifications

Tree assessment reports are subject to the following limitations and qualifications.

General exclusions

Unless specifically mentioned, the report will only be concerned with above ground inspections. No below ground inspections will be carried out without the prior confirmation from the client that such works should be undertaken. The validity, accuracy and findings of this report will be directly related to the accuracy of the information made available prior to and during the inspection process. No checking of independent third-party data will be undertaken. Birch will not be responsible for the recommendations within this report where essential data are not made available or are inaccurate. This report will remain valid for one year from the date of inspection subject to the recommendations specified within being adhered to. It must also be appreciated that recommendations proposed within this report may be superseded by extreme weather, or any other unreasonably foreseeable events. However, if any additional alterations to the property or soil levels are carried out and/or further tree works undertaken other than specified within the report, it will become invalid and a new tree inspection strongly recommended. It will be appreciated, and deemed to be accepted by the client and their insurers, that the formulation of the recommendations for the management of trees will be guided by the following:


1. The need to avoid reasonably foreseeable damage.
2. The arboricultural considerations - tree safety, good arboricultural practice (tree work) and aesthetics. The client and their insurers are deemed to have accepted the limitation placed on

the recommendations by the sources quoted in the attached report. Where sources are limited by time constraints or the client, this may lead to an incomplete quantification of the risk.

Assessment and report undertaken by

Jim Waterson MICFor., MRICS

Report dated 21st June 2023



Sources:

BSI (2012) BS5837:2012 *Trees in relation to design, demolition and construction – Recommendations*

BSI (2010) BS3998:2010 *Recommendations for Tree Works*

Lonsdale (1999) *Principles of Tree Hazard Assessment and Management*


Mattheck and Breloer (1994) *The Body Language of Trees*

Mattheck (2007) *Updated Field Guide for Visual Tree Assessment*

National Tree Safety Group (2011) *Common sense risk management of trees. Guidance on trees and public safety in the UK for owners, managers and advisers.*

Strouts and Winter (1994) *Diagnosis of ill-health in trees*

Appendix 3 Tree and hedge images – Empshill Farm, Farmington

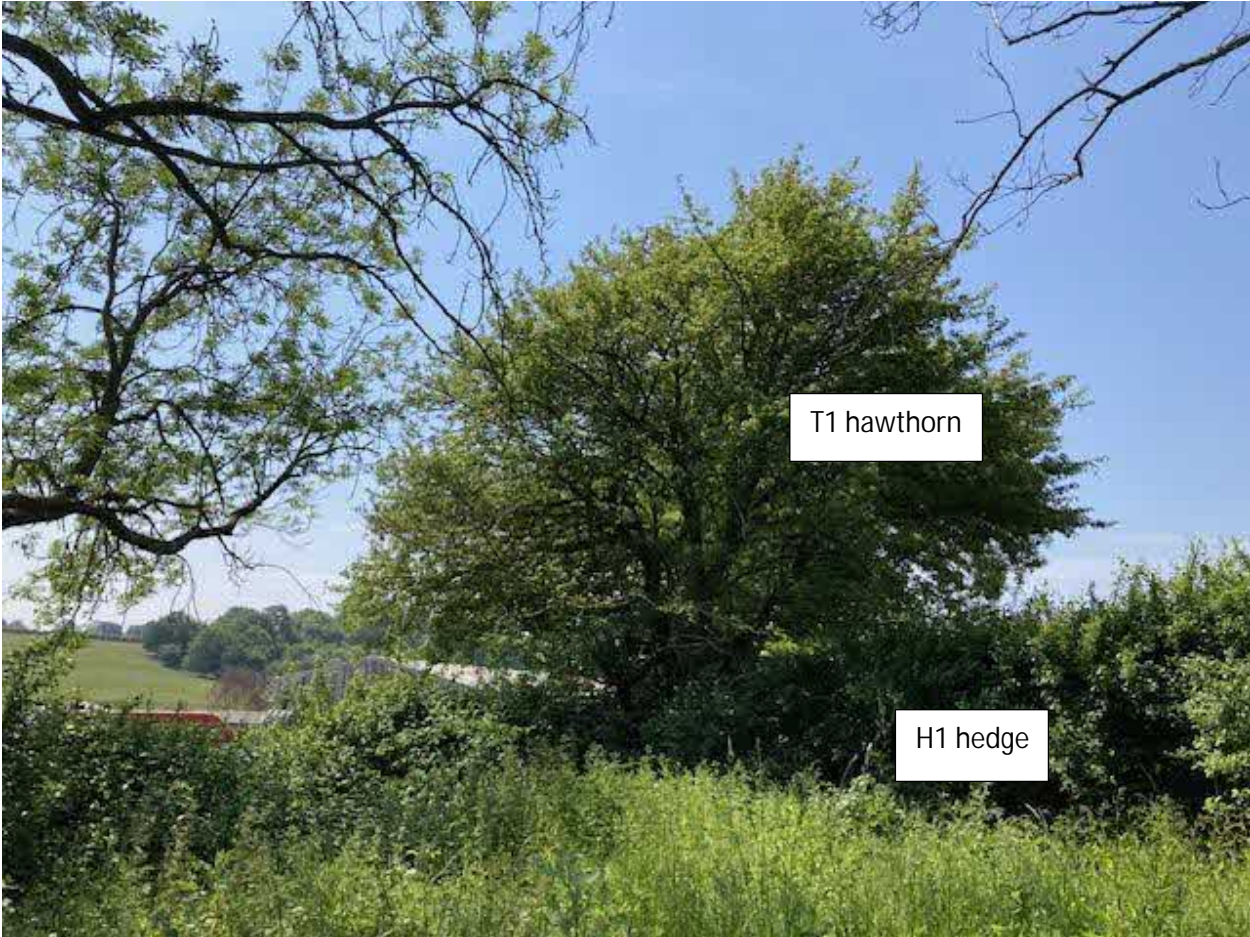

T1 hawthorn


H1 hedge



<G1 ash>

<H1 hedge>

<G4 ash/spruce>

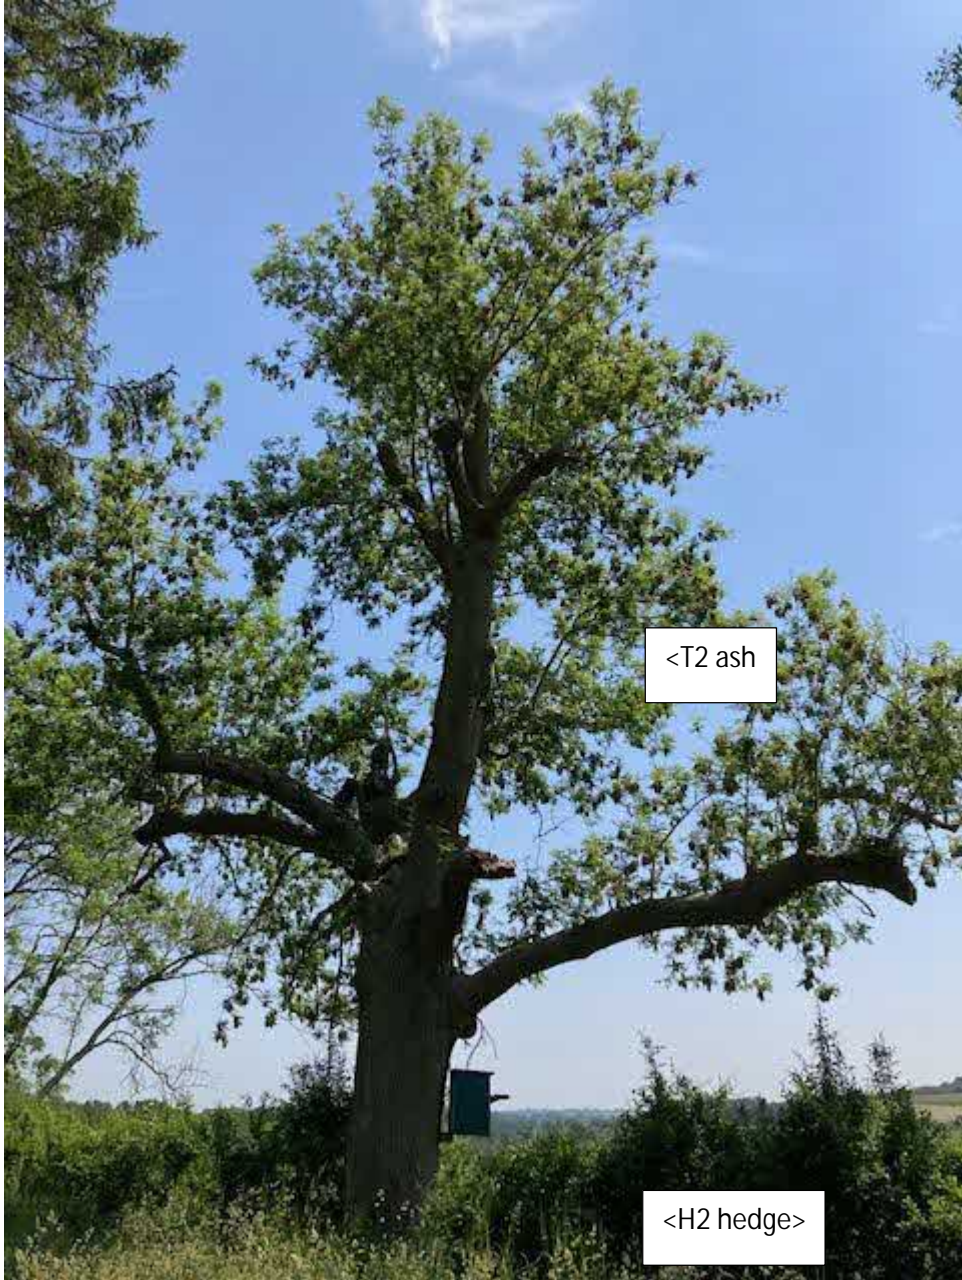

<T2 ash

<H2 hedge>





<G4 ash/spruce>



<G4 ash/spruce>

Appendix 4 Fence/barrier specification outlined in section 6.2.2 Figure 2 of BS 5837:2012, illustrated in copy diagram image below and by an example shown in the copy photograph (photo credit PJC Consultancy)

