

[®]**TAPCOROOFING**
PRODUCTS by **BORAL**



SET YOUR SIGHTS HIGHER

WITH



ACHIEVE NEW HEIGHTS IN AUTHENTICITY, BEAUTY, AND QUALITY WITH TAPCO ROOFING PRODUCTS. TRANSCENDING OTHER BRANDS, TAPCOSLATE AND TAPCOSHAKE PRODUCTS PROVIDE THE INDUSTRY'S FINEST ARTISTRY THROUGH NATURAL TEXTURES AND UNIQUE COLOUR PALETTES THAT WILL

Enhance your home.

Authentic textures and hues, crisp edges, and defined detail bring sublime beauty to every Tapco Roofing Products home. Crafted using moulds cast from the finest natural materials; Tapco delivers the rich and stunning aesthetics of authentic hand-cut slate or the warmth of genuine hand-split cedar shakes, without the weight or cost.

Tapco Roofing Products also help protect your home from the elements with Class 4 Hail Impact Resistance, 110-mph Wind Uplift Performance and Fire Rating's that meet local building regulation requirements. Tapco Roofing Products do not require vigorous maintenance and are environmentally sustainable and energy efficient. For your peace of mind, all Tapco Roofing Products are backed by our transferable, 40-year Warranty.



Elegance, Tradition,
Performance


TapcoSlate Classic's textured surfaces and deckled edges are modelled from authentic natural slates, imparting a controlled uniformity that epitomises natural slate roofing. Classic Slate delivers the appearance of a natural slate roof while offering lightweight, low-cost, durability and cutting-edge, environmentally-conscious material technology that goes into every slate.



Natural Look Durable Lightweight



No Breakages Easy to Fix Low 14° Pitch

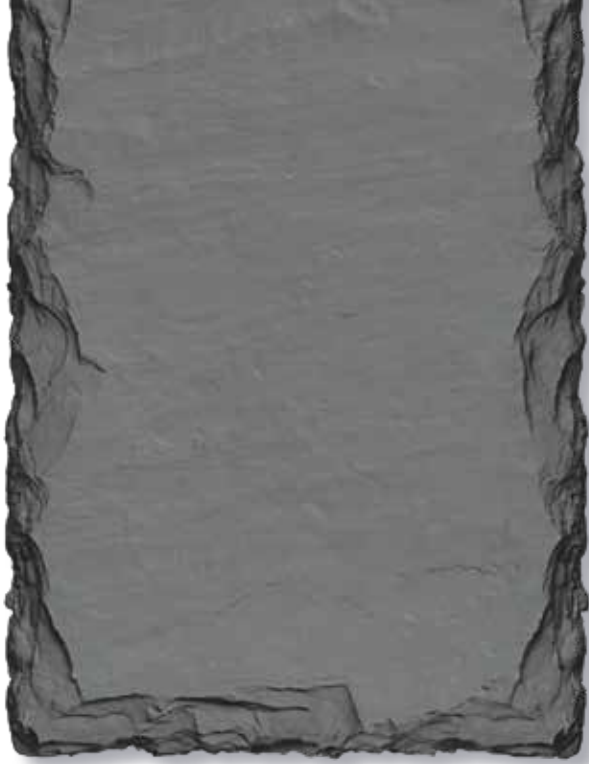

The Natural Beauty of Slate Roofing

Rustic Aesthetics, Superior Performance


TapcoSlate Aledora offers the finest aesthetics and craftsmanship available, delivering the beauty of an authentic hand-cut, natural slate at a fraction of the cost and weight. Multiple colours and hues integrated artistically into every tile match the unique appearance of natural slate that will enhance the kerb appeal and value of any home.

TapcoShake offers the warm, rustic aesthetics of hand-split cedar shake, without the maintenance and safety concerns of wood. TapcoShake's advance polymer composite technology insures that it will not rot, crack, split, warp, or require the maintenance of wood. Authentic colours and subtle shade variations create an inviting, natural look in every piece of TapcoShake wood shake while helping to mitigate the risks of fire, hail or wind.



Beautiful textured surfaces and edges which impart a controlled uniformity that epitomises natural slate roofing enhance the natural colour pallet of our TapcoSlate Classic.


STONE BLACK | 801

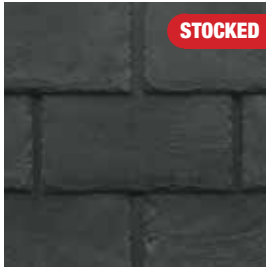


PEWTER GREY | 804



RED ROCK | 809

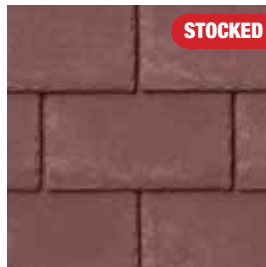


PLUM | 706

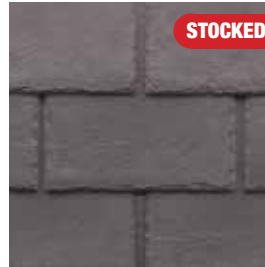

BRICK RED | 709



CHESTNUT BROWN | 712

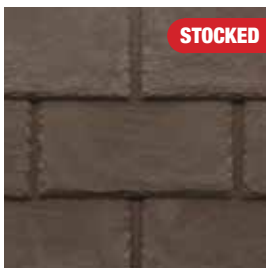

MIST GREY | 803



BRANDYWINE | 806



OLIVE | 814



SAGE GREEN | 815



GREY/BLACK BLEND | 718



EVERGREEN | CR-730



ASH GREY | CR-731




GRANITE | CR-732




GRAPHITE | CR-733




NOTTINGHAM | 788

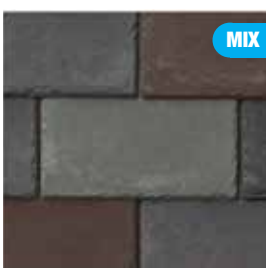


CONCORD | 789

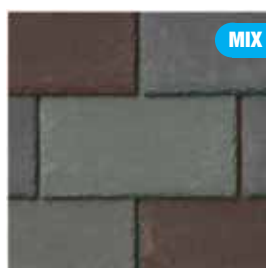


COACHMAN | 790

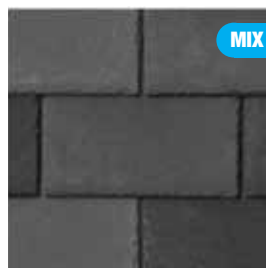

BRUNSWICK | 791

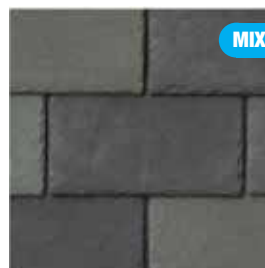

WINTERGREEN | CR-792

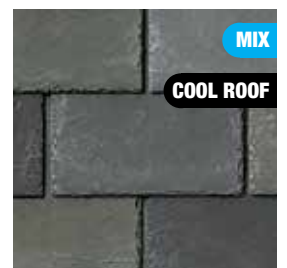

STOCKED Colours labelled as "STOCKED" are available for immediate despatch from our UK warehouse.

COOL ROOF Colours labelled as "COOL ROOF" have a special formula to help keep your roof cooler during hot weather (NOTE: higher in price than regular product).

MIX Colours labelled as "MIX" are a pre-sorted mix of complementary colours to enhance the look of your roof.

PLEASE NOTE: all colours other than those labelled as "STOCKED" are special order only, please contact us for availability/delivery times.

Classic Coverage

PITCH	GAUGE	SLATES M ²
14° to 25°	6" (152mm)	22
25° to 27.5°	6.5" (165mm)	20
27.5° to 30°	7" (178mm)	19
30° to 90°	7.5" (191mm)	18

Ratings & Certification

TESTING	FINDINGS	TESTING	FINDINGS
Fire Rating:	BS476 Pt. 3, Boarded Roof SAA/Battened Roof SAC.	Freeze/Thaw Cycle:	No damage or cracking after 300 cycles.
Hail Rating:	Class IV.	Water Absorption:	No appreciable weight gain.
Wind-driven Rain/Uplift:	Miami Dade TAS-100 (110mph) & BRE EN 15601.	Water Permeation:	Impermeable.
Accelerated UV Exposure:	No cracking or splitting.	Temperature Cycling:	No cracking, deformation or expansion.

All testing certificates, warranty and a full fixing guide are available for download from our website: www.TapcoRoofingProducts.com

Actual colours may vary from printed representation, samples are available on request.

TAPCOSLATE CLASSIC | PEWTER GREY



THE
ONLY
BBA-RATED SLATE
FOR FELT & BATTEN
ROOF PITCHES OF
14°

The Loft Modular Home - Tingdene Homes


- Lightweight – as low as 12kg per m²
- Authentic slate appearance – combines the beauty of slate with modern technology
- Easy to install with pre-marked nailing and exposure guides, plus horizontal spacers
- Easily cut with a fine-toothed saw or sharp utility blade
- No breakages – will not crack, split or break if dropped or walked upon
- BBA approved on roof pitches of 14° and upwards on both felt & batten and fully-boarded applications
- Random Edges and patterns with constant colour throughout
- Built-in camber for tighter fit
- No sorting, clipping or drilling
- 40-year warranty
- Fully tested to BBA Standards, including fire, wind, driven snow & rain, and water absorption
- BRE testing for wind-driven rain found TapoSlate Classic to perform much stronger than all equivalent materials tested
- NOT made from recycled material!

*Bring Timeless Beauty
to your Home with
TapcoSlate Classic*


Whether you have a modern home or historic mansion, TapcoSlate Classic Roofing adds splendour, elegance, and tradition. Classic Slate not only brings beautiful classic style to your home, it is authentically shaped and has textured surfaces and edges. This makes Classic Slate virtually indistinguishable from natural slate—yet it has an even more refined appearance. Classic Slate will not break or delaminate either, standing the test of time better than natural slate.

The authentic hand-cut, thick slate appearance of TapcoSlate Aledora complements the unique blended colours and tones that make it the most beautiful slate alternative on the market today.

CHARCOAL BLACK | 801

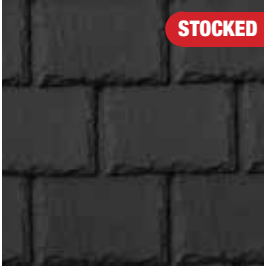

STEEL GREY | 804

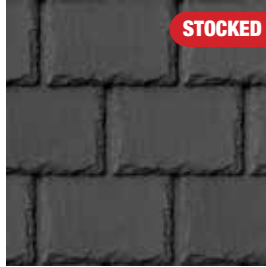

MIST GREY | 803



BRANDYWINE | 806




RED ROCK | 809



OLIVE | 814



SAGE GREEN | 815

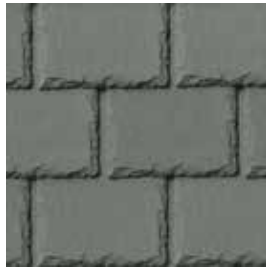

EVERGREEN | CR-730




ASH GREY | CR-731



GRANITE | CR-732



GRAPHITE | CR-733

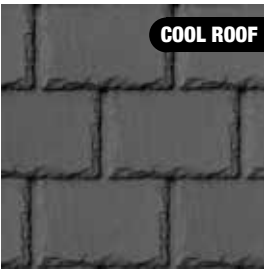

WHEAT | CR-736



RED CEDAR | CR-738




NOTTINGHAM | 788




CONCORD | 789




COACHMAN | 790

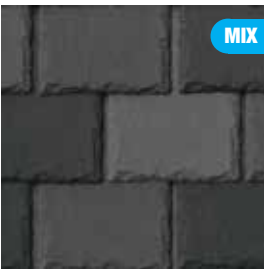

BRUNSWICK | 791

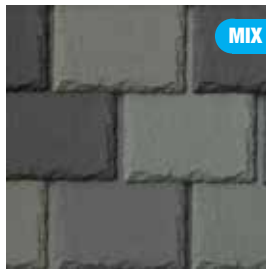

WINTERGREEN | CR-792

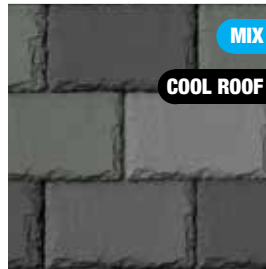

Coverage

PITCH	GAUGE	SLATES M ²
14° to 22.5° (fully boarded or felt & battens)	6" (152mm)	21
22.6° to 90° (fully boarded or felt & battens)	6.5" (165mm)	20
22.6° to 90° (fully boarded or felt & battens)	7" (178mm)	18
22.6° to 90° (fully boarded or felt & battens)	7.5" (191mm)	17
22.6° to 90° (fully boarded or felt & battens)	8" (203mm)	16

STOCKED Colours labelled as "STOCKED" are available for immediate despatch from our UK warehouse.

COOL ROOF Colours labelled as "COOL ROOF" have a special formula to help keep your roof cooler during hot weather (NOTE: higher in price than regular product).

MIX Colours labelled as "MIX" are a pre-sorted mix of complementary colours to enhance the look of your roof.

PLEASE NOTE: all colours other than those labelled as "STOCKED" are special order only, please contact us for availability/delivery times.

All testing certificates, warranty and a full fixing guide are available for download from our website: www.TapcoRoofingProducts.com

Actual colours may vary from printed representation, samples are available on request.



THE
ONLY
HAND-CUT LOOK,
SYNTHETIC SLATE
ON THE MARKET
TODAY!

Mansard Roof (also called a French roof or kerb roof)

- TapcoSlate Aledora tile moulds are an exact replica of quality natural roofing slates. Stone cleavage and unique edges are replicated exactly under intense pressure when manufacturing our durable roofing slates and shingles
- Available in S-Series (12" tile width)
- Lightweight – as low as 8.35kg per m²
- Easy to install with pre-marked nailing and exposure guides and spacers
- Easily cut with a fine-toothed saw or sharp utility blade
- No sorting, clipping, or drilling prior to roof loading. Packaged in bundles of 24 for easy handling
- Fittings (ridges and hips) are mechanically fixed
- Wide choice of colours (special order only)
- Non-repeating staggered or straight application
- 40-year warranty
- TapcoSlate Aledora is **NOT** made from recycled plastics but is manufactured from virgin limestone and polypropylene

*Enrich Your Home with
the Hand-cut Look of
TapcoSlate Aledora*

If you seek the natural beauty of thick slate roofing, without its high cost and weight, Aledora Slate was made for you. With the finest aesthetics and craftsmanship available, Aledora's half-inch-thick tiles provide the variegated, authentically textured look of slate for a fraction of the cost. Aledora's crisp, jagged edges mimic slate, creating shadow variance. Each tile is uniquely beautiful, so no two roofs are identical.

The warm, rustic aesthetics of hand-split cedar shakes come to life with TapcoShake's authentic colours and subtle shade variations that create an inviting, natural look in every piece.

WEATHERED GRAY | 750



CEDAR BROWN | 751



NEW CEDAR | 752



AGED CEDAR | 753



RUSTIC CEDAR | 754



EVERGREEN | CR-730



ASH GREY | CR-731



GRANITE | CR-732



GRAPHITE | CR-733



WHEAT | CR-736



RED CEDAR | CR-738



Shake Coverage

PITCH	GAUGE	SHAKES M ²
14° to 24.4°	9.25" (235mm)	21
24.5° to 90°	10.25" (260mm)	19

COOL ROOF Colours labelled as "COOL ROOF" have a special formula to help keep your roof cooler during hot weather (NOTE: higher in price than regular product).

PLEASE NOTE: TapcoShake is available as special order only, please contact us for availability/delivery times.

All testing certificates, warranty and a full fixing guide are available for download from our website: www.TapcoRoofingProducts.com

Actual colours may vary from printed representation, samples are available on request.



THE
ONLY
WOOD-LOOK,
SYNTHETIC SHAKE
ON THE MARKET
TODAY!

- Lightweight – as low as 10.3kg per m²
- Authentic shake appearance – combines the beauty of wood with modern technology
- Easy to install with pre-marked nailing and exposure guides, plus horizontal spacers
- Easily cut with a fine-toothed saw or sharp utility blade
- No breakages – will not crack, split or break if dropped or walked upon
- Random Edges and patterns with constant colour throughout
- No sorting, clipping or drilling
- 40-year warranty
- 9.25" & 10.25" (235mm & 260mm) Exposure options.
- Non-repeating; staggered or straight application.
- Bundles pre-sorted for colour and shade width variations
- Class A Fire Rating
- Class 4 Impact Rating
- 110 MPH Wind Uplift Rating
- NOT made from recycled material!

*Cherish the Natural
Carefree Beauty of
Tapco Shake*

For the warm, rustic aesthetics of cedar shake, without the maintenance and safety concerns, choose TapcoShake. It matches genuine cedar, yet our composite roofing is so durable that it will not rot, crack, split, or need wood's chemical upkeep. Charming colours and subtle shade variations create cedar's inviting, authentic look in every shake.

A range of purpose-built accessories to complement your TapcoSlate or TapcoShake roofing projects. Built from our own TapcoSlate/TapcoShake material, or from painted-to-colour ABS (Acrylonitrile Butadiene Styrene), these roofing accessories are made to last.



Classic Ridge & Hip Cap
Universal Fitment

CLASSIC



Classic Ridge-to-Hip Junction
Three Pitches: 14° to 17°, 18° to 24° and 24° to 30°

CLASSIC




Classic Ridge 90° End Cap
Three Pitches: 25° to 29°, 30° to 34° and 35° to 40°

CLASSIC



Aledora Ridge & Hip Cap
Universal Fitment

ALEDORA

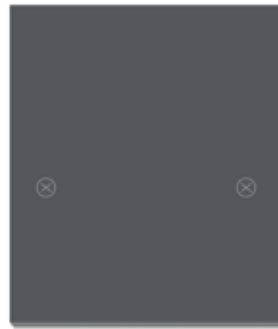

Aledora Starter Tile
Eaves Starter Course

ALEDORA



TapcoShake Ridge & Hip Cap
Universal Fitment

SHAKE



TapcoShake Starter Tile
Eaves Starter Course

SHAKE



Dry Verge
Dry-fix Slate/Shake Dry Verge System

CLASSIC

ALEDORA

SHAKE



Dry Verge Joining Clips
Forms a Continuous Water Joint for the Dry Verge

CLASSIC

ALEDORA

SHAKE



RidgeMaster Plus®
Continuous High-level Ridge Ventilation System

CLASSIC

ALEDORA

SHAKE



HipMaster®
Continuous Hip Ventilation System

CLASSIC

ALEDORA

SHAKE



Tapco Abutment Ventilator
Continuous High-level Abutment Ventilation System

CLASSIC

ALEDORA

SHAKE




Edwardian Conservatory "3-Way" Roof



Classic Inline Vent & Inline Vent Pipe Adapter
10,000mm²/m Ventilation Provision

CLASSIC

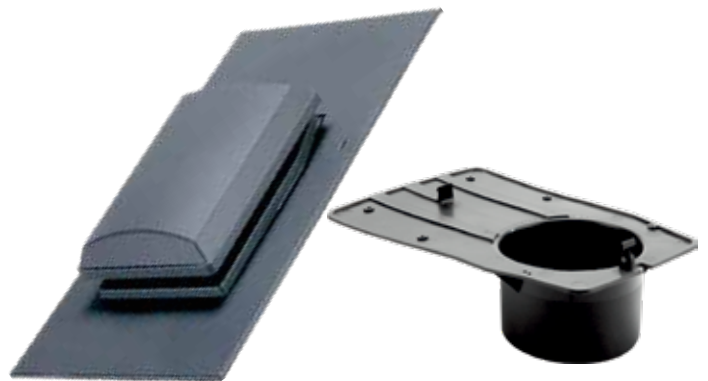

Cowl Vent & Cowl Vent Pipe Adapter
10,000mm²/m and 20,000mm²/m Ventilation Provision Sizes

CLASSIC

ALEDORA



Tapco Eaves Ventilation Kits
Continuous Low-level Eaves Ventilation Available
in both 10,000mm²/m Air Flow for Cold Roof
Applications and 25,000mm²/m Air Flow for
Warm Roof Applications

CLASSIC

ALEDORA

SHAKE



Rafter Ventilation Roll
Additional 6m Length Rafter
Roll for 25,000mm²/m Warm
Roof Eaves Ventilation Kits



Screws and Nails

CLASSIC

ALEDORA

SHAKE



Protect Wunderlay Impermeable Underlay

CLASSIC

ALEDORA

SHAKE



Protect VP300 Permeable Underlay

CLASSIC


ALEDORA

SHAKE

ABOUT TAPCO ROOFING PRODUCTS

Just as your roof is above all, we place innovation above all. At **Tapco Roofing Products**, innovation is how we deliver artistically beautiful, authentic, durable roofs. From our industry-leading 15-colour palette for **TapcoSlate**, to our 40-year warranty and the industry's only compression-moulded composite Cedar Shake tiles, innovation is how we arrive at superior quality. We craft architectural roof tiles that mirror the natural detail of slate and cedar in all their charm. The memorable elegance, stunning colour and unparalleled toughness that **Tapco** delivers are undeniably real. We have developed, and strive to continuously refine, a better way to beauty. All of our roofing is colour-through, pre-curved with our InFlex™ design for maximum durability, rated for 110mph wind uplift, rated with Class 4 impact resistance, and our **TapcoSlate Classic** comes with full BBA and ETA certification, and is also an LABC Registered Product. **Tapco Roofing Products** do away with the maintenance, durability and cost issues that are a concern with roofs of quarried slate and cedar wood. We make roofing that's easy for homeowners to love, easy for architects to specify and easy for roofers to install.

Tapco Roofing Products is part of the **Boral** group of companies. **Boral Limited** is an international building and construction materials group with three strong divisions – **Boral Australia**, **USG Boral** in Asia, Australasia and the Middle East, and **Boral North America**.

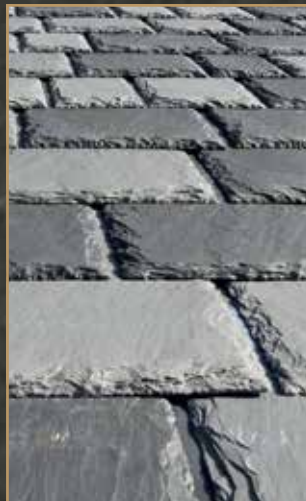


TAPCOROOFING
PRODUCTS by **BORAL**

+44 (0)1482 880478 | TapcoRoofingProducts.com | international@tapcoinc.com

