


Rev	Date	Detail	Drawn by	Checked by	Drawing Scale
00.00.00					
Dec 2023			RN	LW	1:5/20 @A1

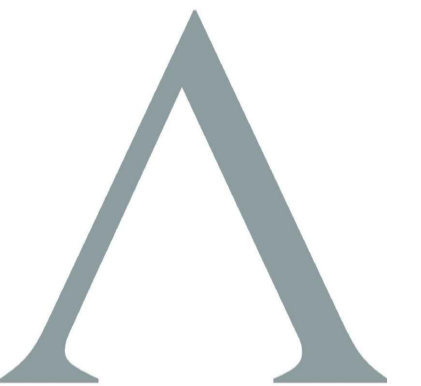

**Timber Windows & Doors:**

All joinery to be supplied to site fully primed with aluminium oxide primer prior to installation. Make good all internal plaster and timber finishes affected.

Fabrication in hardwood to all new doors, window frames & cills. ALL timber to be FSC sourced.

Fit with Slimlite Plus 4-5-3 double glazed units installed as manufacturers recommendations.

**IRONMONGERY**

Black traditional cast iron.

The glazing for all the timber joinery will be

- fitted with putty
- the interior seal of the double glazing (that will be visible around the edges between the panes) will be in a colour to match the paint of the windows
- the paint will have a satin/eggshell finish - colour TBC.

**TIMBER WINDOW & DOOR SCHEDULE**

WINDOW/DOOR NO.	LOCATION	STRUCTURAL OPENING	CILL	OPENING	IRONMONGERY	COLOUR
WG01	Changing (GF)	1105w x 1905h	Timber	Opening casement	Traditional black iron	TBC
WG02	Home Gym/Studio (GF)	1170w x 1905h	Timber	Opening casement	Traditional black iron	TBC
WG03	Home Gym/Studio (GF)	3140w x 2250h	Timber	Fixed	Traditional black iron	TBC
WG04	Kitchen (GF)	1200w x 800h	Timber	Opening casement	Traditional black iron	TBC
WF01	Bedroom (FF)	1225w x 1065h	Timber	Fixed	Traditional black iron	TBC
WF02	Bathroom (FF)	1215 x 990h	Timber	Fixed	Traditional black iron	TBC
WF03	Bedroom (FF)	1200w x 800h	Timber	Opening casement	Traditional black iron	TBC
WF04	Bedroom (FF)	1200w x 800h	Timber	Opening casement	Traditional black iron	TBC
DG04	Kitchen (GF)	1700w x 2000h	Stone	Opening casement	Traditional black iron	TBC
DG05	Shower (GF)	850w x 2000h	Stone	Opening casement	Traditional black iron	TBC

A: The Astrolabe, Cheddar business park, BS27 3EB  
 E: Studio@ArchiWest.co.uk T: 01934 311017  
 W: www.ArchiWest.co.uk

Drawing Stage

PLANNING

Drawing title

Window and Door Joinery Details

Project

NAILSEA

Four Gables

Drawing number

Rev.

0231.06

