


View from Main Dwelling to Rear Boundary – Proposed Twin Unit to be positioned across Rear Garden.



View from proposed Twin Unit looking back up to Main Dwelling.

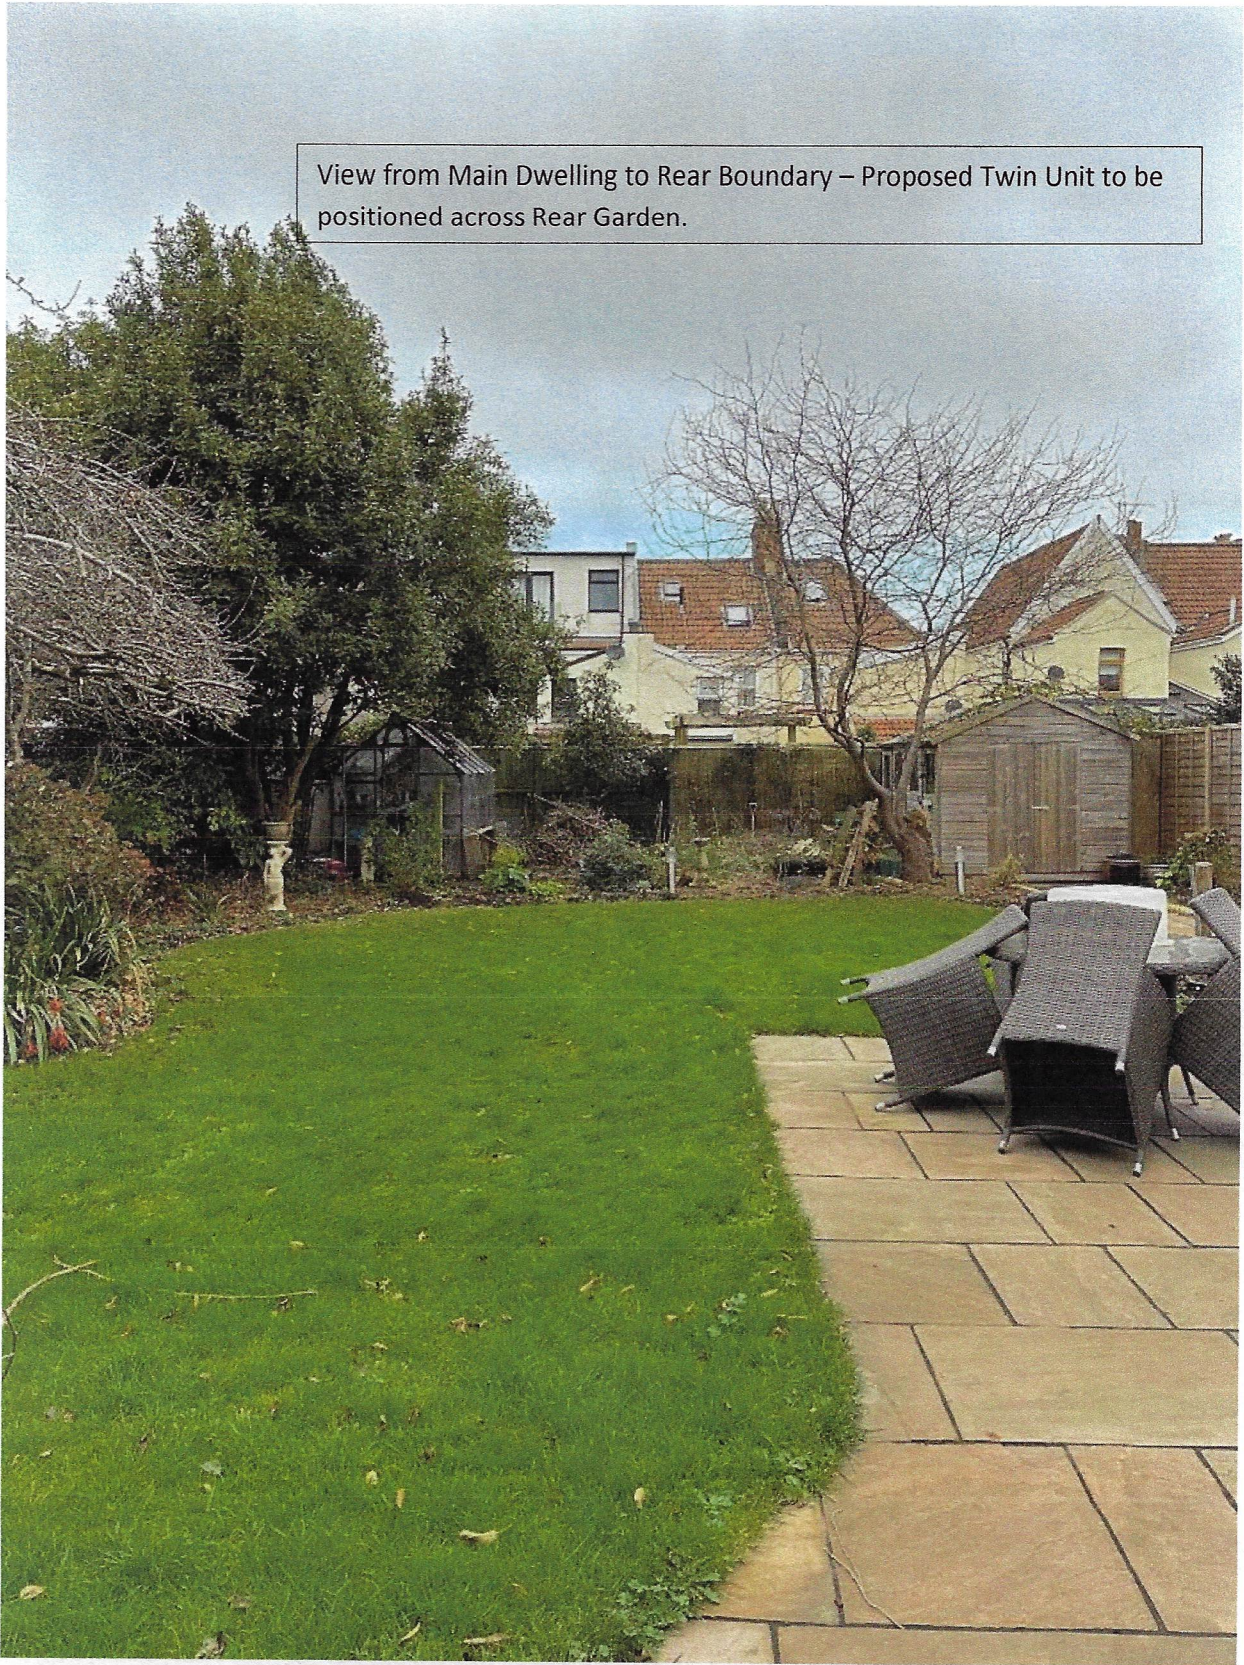


Site Preparation

Service Details

1. Electric, Water and Foul Drainage services provided via the main dwelling house services.
2. Electrical mains supply extended from the existing dwelling house and connected using a quick release socket connector (see below)
3. Water mains supply extended from the existing main dwelling house and connected using a push fit shut off quick release valve see below.
4. Foul drainage services extended from the existing dwelling house and connected using standard push fittings.

Note: In the event of the mobile home is moved or removed from site, all services can quickly and easily be disconnected and terminated.

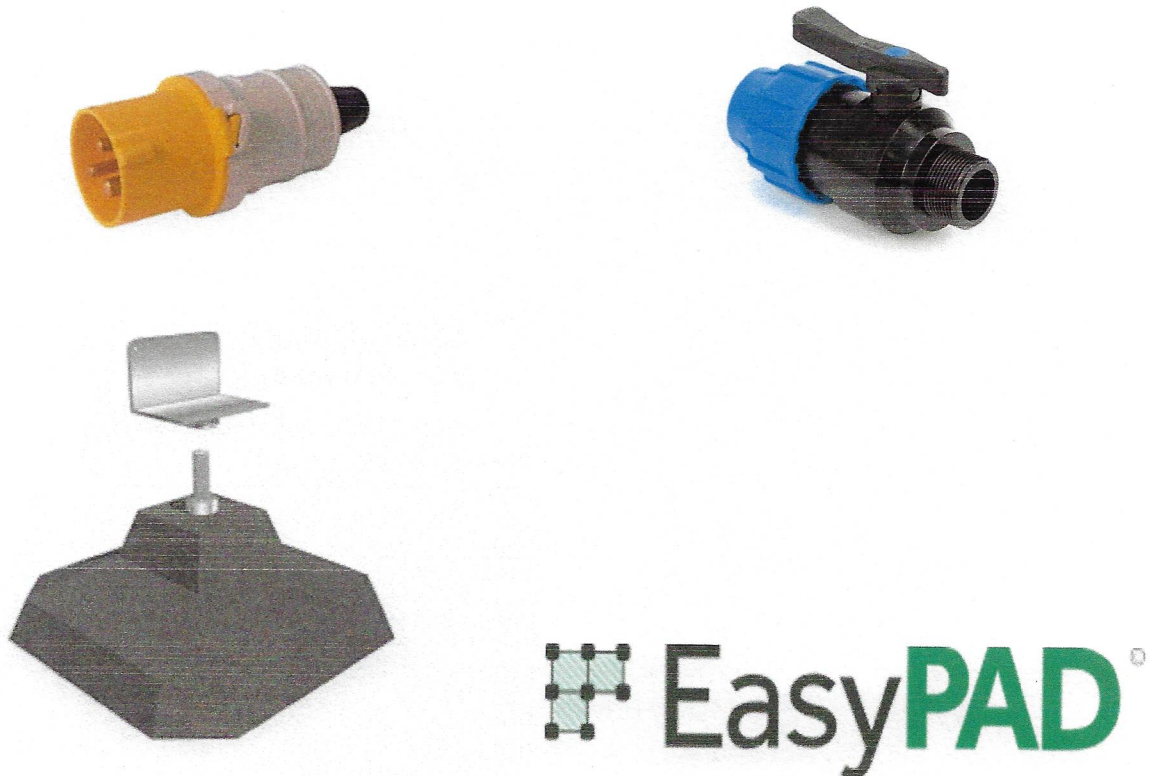

EasyPad Foundation System. An adjustable pad foundation system designed to support timber buildings. This system sits on top of compacted stone and comes with 80mm of adjustment for levelling your building. Simply design a timber ladder frame out of 2-inch-wide timbers and attach it to the EasyPads and level. Position your building on top. This system elevates your building away from ground moisture and prevent cold bridging from the ground.



LAG 200mm Polyurethane Tyre, Cast Iron Twin Swivel Castor 2000kg Load Capacity

7474

Twin cast iron wheels are fitted with shielded bearings. Swivel types have a taper roller bearing and single thrust bearing with grease nipple and head seal. Wheel series Z. 248-3744

- The Twin Unit Caravan is assembled as two individual independent sections with the final act being the connection of the two halves in compliance with the Caravan Act.
- The process of assembly is identical whether on site or off site. The two sections of a twin unit caravan are independently assembled, then brought together by lifting or wheeling into position, with the final act being connection of the two sections to form a whole.
- Due to the size of the proposed twin unit caravan. The road and site access complexities, independent assembly of the two sections will take place on site, they will then be moved into position with connecting as the final act.