Proposed Native Understorey Shrub Planting.-Ecological habitat and screening from the proposals. Bareroot Whips, 60-90cm, or 3I pot grown, 3/sqm. Corylus avellana Crataegus monogyna Sambucus nigra Frangula alnus

Cornus sanguinea Euonymus europaeus Base of shrubs seeded with Emorsgate EH1F -Wild Flowers for Hedgerows (or equal and approved)

Proposed Native Mixed Species Hedge Planting. To surround the site and provide connectivity. Bareroot Whips, 60-90cm Planted in double staggered row, 400mm apart. Whips planted at 400mm centres.

> At least 5no. of: Corylus avellana Crataegus monogyna Rosa canina Sambucus nigra Frangula alnus Viburnum opulus Cornus sanguinea Euonymus europaeus

Base of shrubs seeded with Emorsgate EH1F -Wild Flowers for Hedgerows (or equal and approved)

Informal Planting Ornamental Planting from RHS 'Plants for Pollinators' and Specimen Grasses and Shrubs

Proposed Retention of Native Trees.-

Proposed Native Understorey Shrub Planting.-Ecological habitat and screening from the proposals. Bareroot Whips, 60-90cm, or 3I pot grown, 3/sqm. Corylus avellana Crataegus monogyna Sambucus nigra Frangula alnus Viburnum opulus


Cornus sanguinea Euonymus europaeus

Base of shrubs seeded with Emorsgate EH1F -Wild Flowers for Hedgerows (or equal and approved)

Proposed New Native Trees.—

Alnus glutinosa Betula pendula Malus sylvestris

Wild Flowers for Hedgerows (or equal and approved)

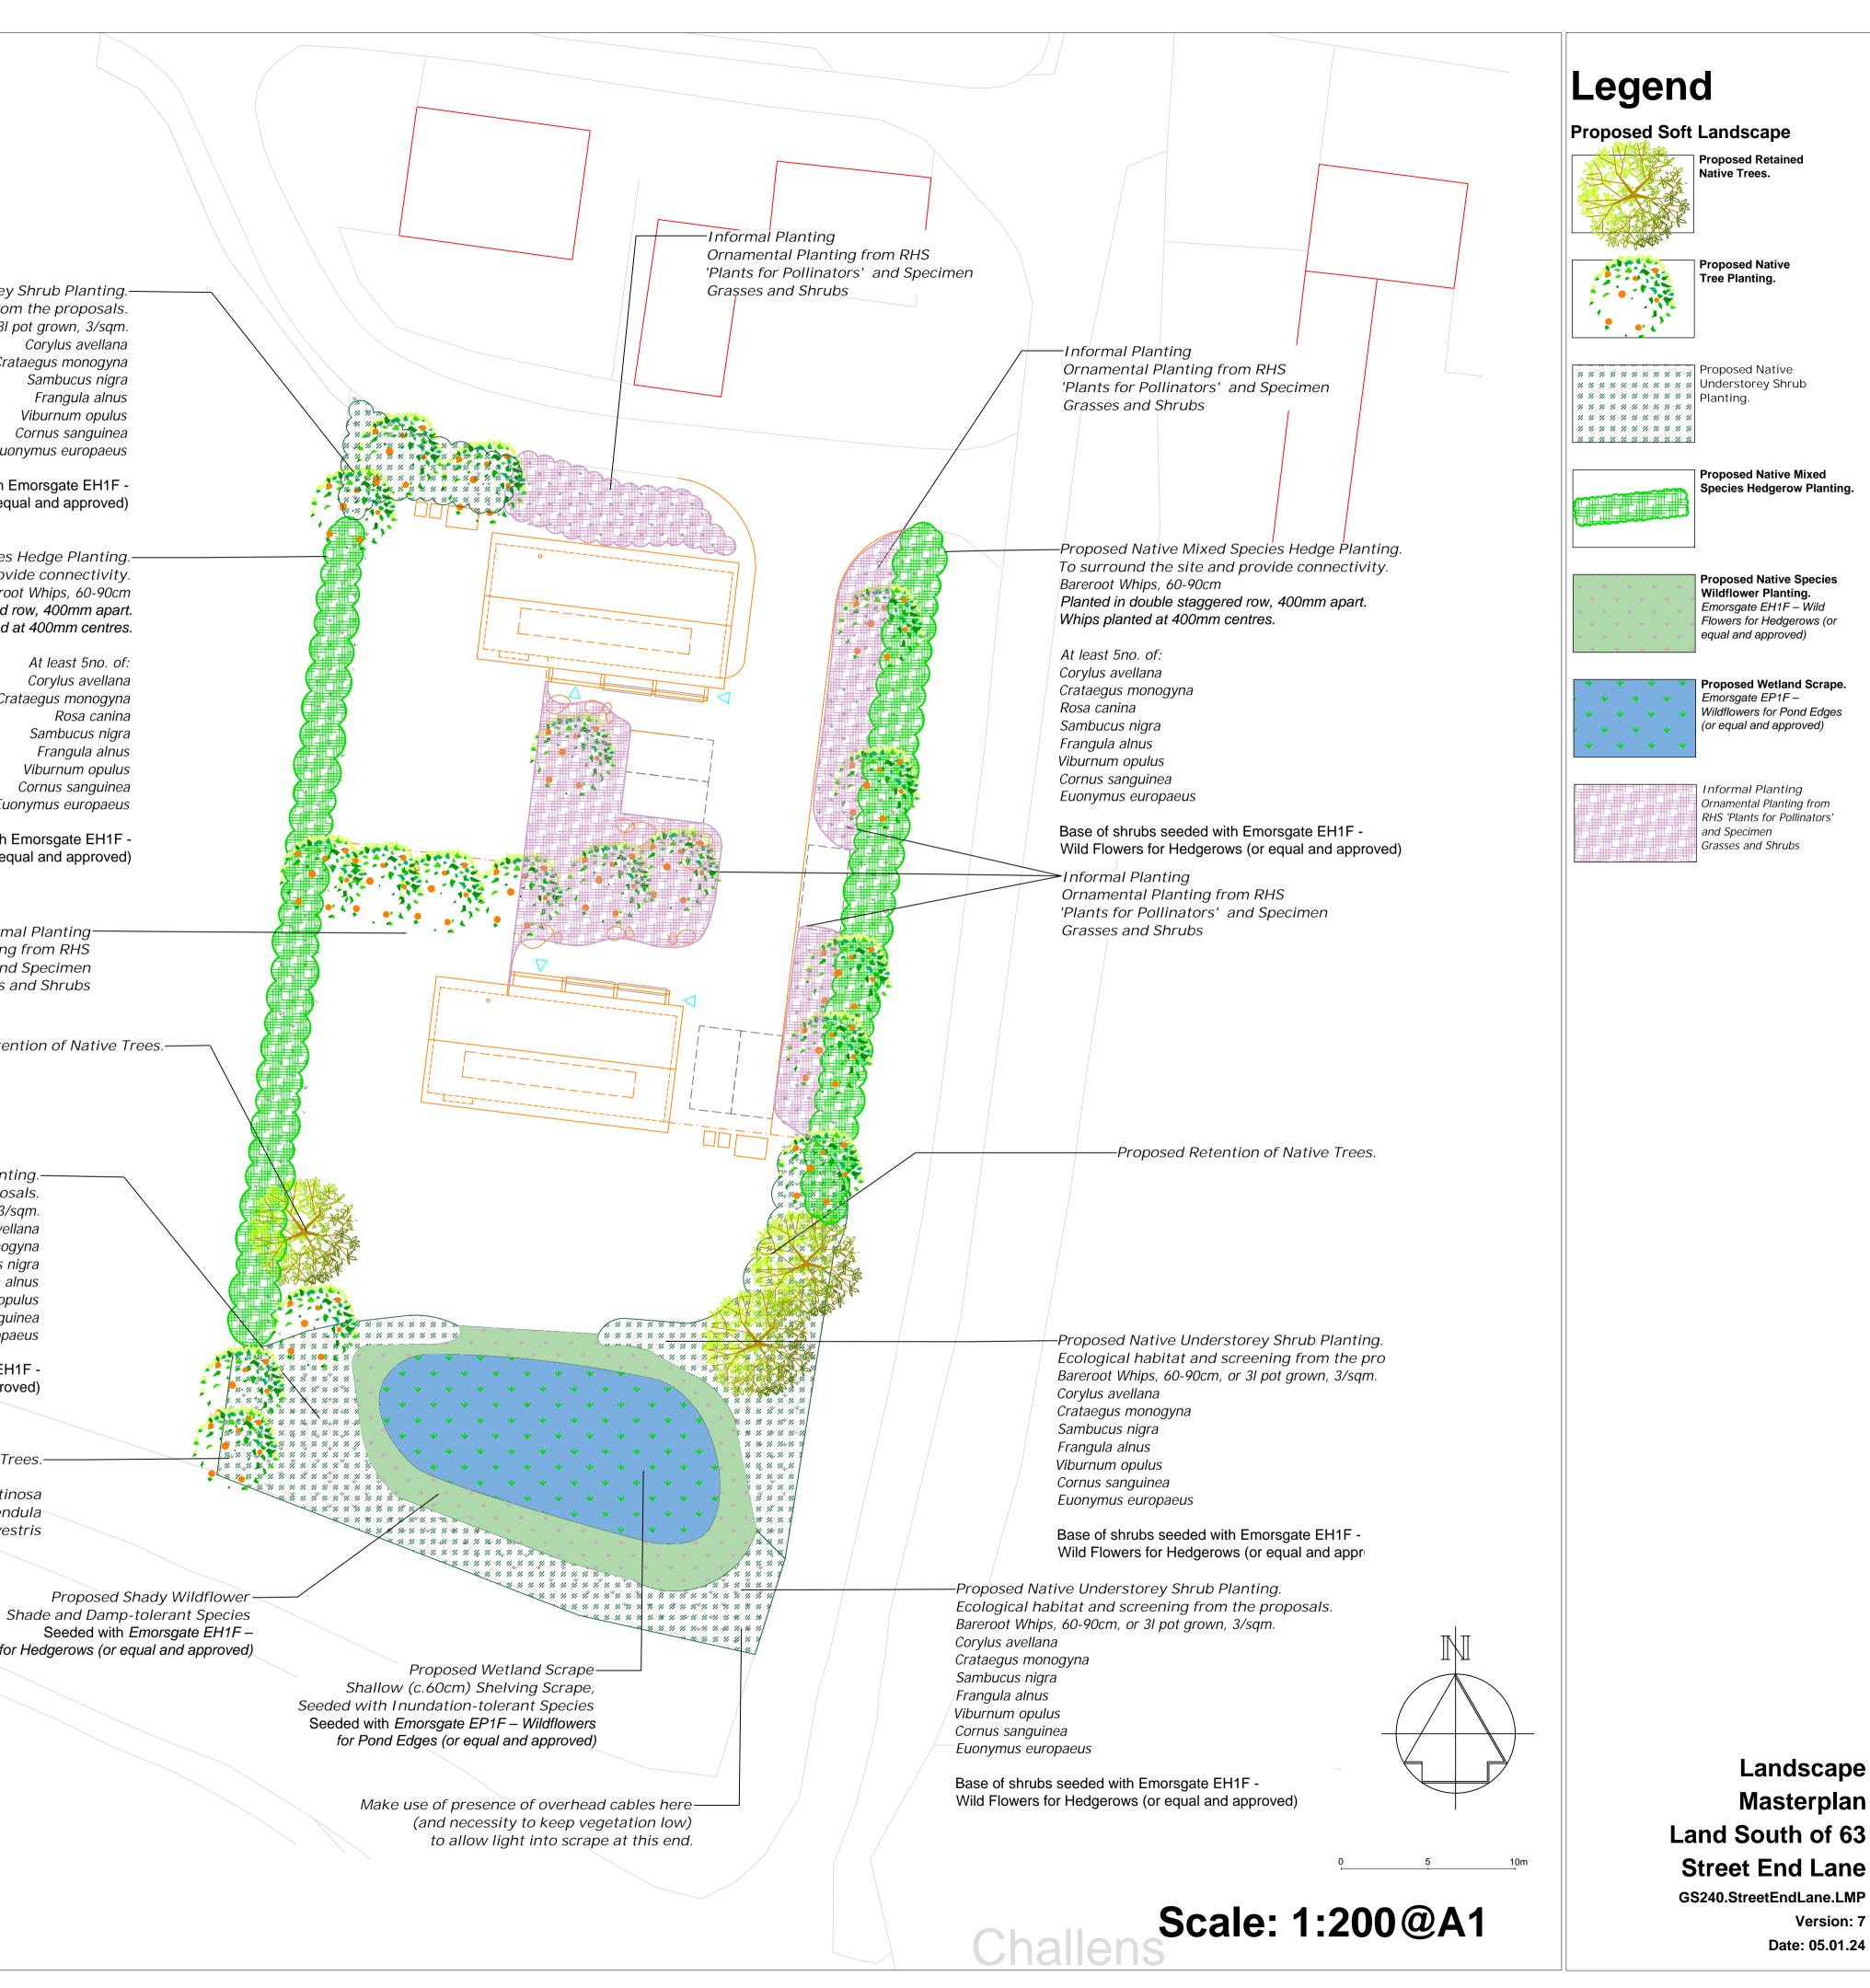

Version: 7

Date: 05.01.24