




GD05



GD06

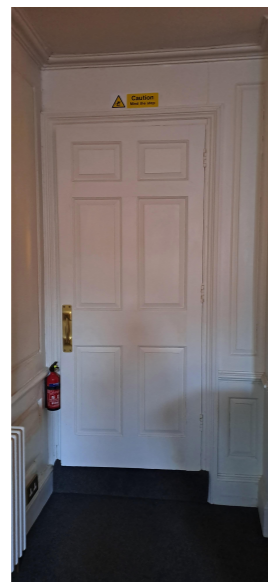

GD06.2



GD07



GD08



GD09



GD10



GD12



GD19



GD22



GD27

### Specification for upgrade to FD30

Existing doors to be upgraded to 30 min fire rating, receive new fire seals + door closer + coated with envirograf paint



Illustration showing proposed fire seal installation

#### Fire-rated clear varnish Specification

Envirograf Product 42 clear varnish system for timber doors; 1 coat of HWAP/WB Primer, followed by 2 coats of HWO2N Intumescent, with 1 coat of HW EXCEL CLEAR top coat.

#### Door closer specification


Rutland TS9205 Fire Door Closer - Dark Bronze finish



#### Fire Seal Specification

Doors to be removed from hinges and a 10x10mm rebated groove cut into the sides and tops of doors, allowing for fitting a fire and smoke seal.

Envirograf rebated intumescent fire and smoke seals 10mm holder with 4mm brush, 30 minute fire rated

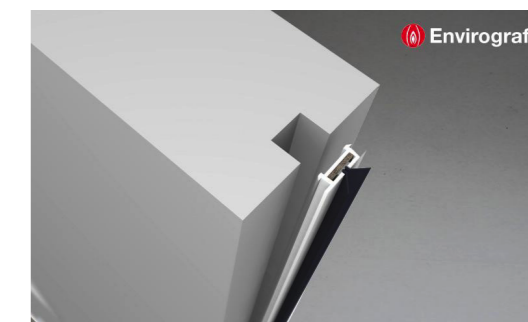

Recessed fire strip with smoke seal

GD05, 06, 10, 12, 19, 22, 27 Existing panelled door at final exit upgraded to FD30's

GD07, 09 Door locked closed and upgraded to FD30's

GD08 FD60 - remove existing doors and replace with 60 minute fire rating

GD13 New FD30's door

## Photographic door schedule - Ground floor and Fire door Spec

DRAWING NO. **PL\_04.1** REVISION PROJECT Stone Court House

## Planning and Listed Building Consent

SCALE: 1:100 PRINT SIZE: A3 ISSUE DATE: 2023/12/11 PROJECT No: 2302

flintarchitecture.com  
info@flintarchitecture.com  
+44 7388 199 878

The Studio, Plas yn Grove, SY12 9JT

**FLINT**  
ARCHITECTURE