


All storm water runs into soak away

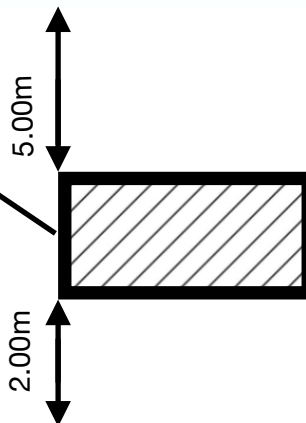

Located 5m from dwelling min 2m from boundary
Soakaway 4m x 2m x 0.4m
Aqua cell eco or similar crates with geotextile surround
CL 88.90
IL 88.00
Inflation rate
1.4496 x 10³
M/S (5.219m/hr)