



© Franklin Ellis (2022) Ltd. Company No: 14131809

Wall Key

Existing walls Proposed wall infill

——— Proposed partitions

— - — Proposed wall lining

<u>Floors</u>

- Ground suspended floors lift floorboards, insulate below, replace floorboards, replace skirtings and reinstate other joinery or renew with age appropriate replacements. • Upper floors - lift floorboards, upgrade acoustic performance and fire separation above
- existing ceilings between joists, replace floorboards. Upper floors raised to accommodate service void and insulation, reinstate existing skirtings

and joinery or renew with age appropriate replacements.

 Perimeter walls / party walls – remove plaster finishes, line with insulated plasterboard, replace skirtings or renew with age appropriate replacements.

Retain existing fireplace surrounds. Generally, strip out all unnecessary services. Set back infill to existing openings to retain feature where possible.

<u>Ceilings</u>

<u>Walls</u>

 Overboard damaged ceilings. Redecorate covings. Carefully remove covings where new partitions meet ceiling, reinstate coving.

 Assess condition of existing doors and where necessary replace with period appropriate

<u>Windows</u>

replacements.

- Assess on individual basis.
- Overhaul, carry out like for like repairs or replace with similar – existing windows to be draught stripped, new windows to be double
- Trickle vents provided to all existing windows.


 Timber. Overhaul, carry out like for like repairs. Stairs/balustrades

Overhaul, repair like for like.

<u>Services</u>

- Services to be restricted to new partitions where possible.
- Services to existing walls to chase in plasterwork/walls or run in baton zone behind plasterboard.
- Ventilation via opening windows. Heating via localised boilers feeding wet wall mounted radiators.

GENERAL NOTES

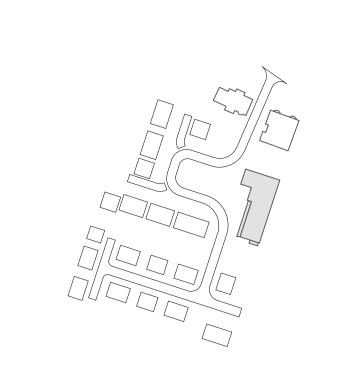

General Notes:

Key Plan:

- 1. Do not scale off this drawing unless a scale bar is provided.
- 2. Any ambiguities, omissions and errors on this drawing should be notified immediately to the Architect before the commencement of works on site.
- 3. Dimensions are in millimetres unless otherwise stated. 4. Dimensions, unless otherwise indicated, are to the face of unfinished block walls
- or to the finished plaster face of stud partitions.
- 5. Dimensions are to be checked on site. Discrepancies are to be notified
- immediately to the Architect before the commencement of works on site. All levels are in meters unless otherwise stated.
- 7. This drawing is to be read in conjunction with all other relevant drawings and specifications for this project.

Revision Notes:

Re∨.	Date	Notes	Issuer	Checke
P1	2023-08-04	Preliminary Issue P1	IAT	JC
P2	2023-09-12	Refined layout with elevational alterations.	MJ	JC
Р3	2023-10-06	Rooflight reinstated.	MJ	JC
P4	2023-10-17	Planning Submission	MJ	JC





LONDON ROAD

NEWARK

Project Address: London Rd, Newark NG24 23-0030

Client Name: Bildurn Properties

Director / Associate: Project Lead: **Matthew Branton** Sarah Boxford Functional Breakdown: A3 Planning B3 - Block 3

GA Roof Plan Proposed -Block 3

1:100

Identification / Location

Project Originator Function Space Form Disc. Number

BLR-FEA-B3-R1-DP-A-2233

