



1 Brick chimney

windows 6 Lead Turret

- (2) Clay tiled roof
- 3 Rooflight
- **7** Timber Louvres (4) Timber painted Eaves 8 Brickwork
- **5** Existing Painted timber frame **9** Brick quoins
 - (10) Stone door surround
 - (**11**) Lead flat roof
 - (12) New clay tile roof
- (13) New painted timber frame windows
- (14) New timber door
- (**15**) Obscured glass

© Franklin Ellis (2022) Ltd. Company No: 14131809

External Walls

demolition.

<u>Ironwork</u>

<u>Roof</u>

 Overhaul turret/weathervane, make like for like repairs where necessary. Make like for like repairs with clay tiles/slates to match on pitches, hips etc. Strip off bay roof and replace with single ply membrane with applied lead rolls.

<u>Doors</u>

<u>Windows</u>

windows.

<u>Joinery</u>

<u>Services</u>

GENERAL NOTES

 Strip off all unnecessary services. • Repoint where necessary, clean brickwork. Make good exposed existing walls following New areas of external wall/infill to be in brick

Overhaul and redecorate.

reclaimed from elsewhere on the building/site.

 Renew all leadwork, flashings etc. Cap chimney. Overhaul rainwater goods replace like for like where necessary. Vent tiles to be added where necessary.

 Assess on individual basis. Overhaul, carry out like for like repairs or replace with period appropriate replacements.

Restore original glazing to first floor front


 Assess on individual basis. Overhaul, carry out like for like repairs or replace with similar – existing windows to be draught stripped, new windows to be double glazed.

<u>Timberwork</u>

Overhaul, carry out like for like repairs.

Timber Overhaul, carry out like for like repairs.

Ventilation via opening windows.

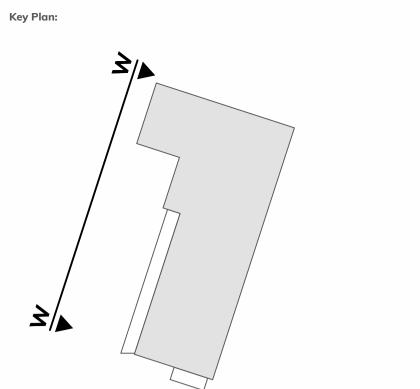

General Notes:

- 1. Do not scale off this drawing unless a scale bar is provided.
- 2. Any ambiguities, omissions and errors on this drawing should be notified immediately to the Architect before the commencement of works on site.
- 3. Dimensions are in millimetres unless otherwise stated. 4. Dimensions, unless otherwise indicated, are to the face of unfinished block walls or to the finished plaster face of stud partitions.
- 5. Dimensions are to be checked on site. Discrepancies are to be notified
- immediately to the Architect before the commencement of works on site. All levels are in meters unless otherwise stated.
- 7. This drawing is to be read in conjunction with all other relevant drawings and specifications for this project.

Revision Notes:

	Rev.	Date	Notes	lssuer	Checker
Г	Ρ1	2023-08-04	Preliminary Issue P1	IAT	JC
	P2	2023-09-12	Refined layout with elevational alterations.	MJ	JC
	P3	2023-10-17	Planning Submission	MJ	JC



LONDON ROAD NEWARK

Job Number: 23-0030 **Client Name: Bildurn Properties**

Project Address: London Rd, Newark NG24 1TW

Project Lead:

Sarah Boxford

Functional Breakdown:

B3 - Block 3

Scale:

1:100

Director / Associate: Matthew Branton

Status: A3 Planning Sheet Size:


A1L

Drawing Name: **GA West Elevation**

Proposed - Block 3

Full Document Reference:

Identification / Location Project Originator Function Space Form Disc. Number BLR-FEA-B3-XX-DE-A-3733



FRANKLIN ELLIS FE ARCHITECTS