



New hardwood door and frames, to be fitted to existing opening in granite wall. Door and glazing beads etc. to be painted dark blue, with hardwood frames painted white. Internal surface of door and frames etc. to be painted white.

Upper panels in door to be glazed with clear toughened glass, held in position with 25 x 60mm bolection mouldings.


Fanlight to be formed as shown with toughened glass and number.

Brushed steel lever handle and letter plate to be fitted as shown.

Doors to be fitted with suitable factory fitted locking devices as recommended in Section 2 of 'Secured by Design' (ACPO, 2009) or in accordance with BS 7950 : 1997.

New door to be installed and fixed in accordance with section 8 of B.S. 8213-4:2007 or as directed by manufacturers written instructions where these meet or exceed the recommendation within the British Standard.

## PROPOSED WEST ELEVATION.

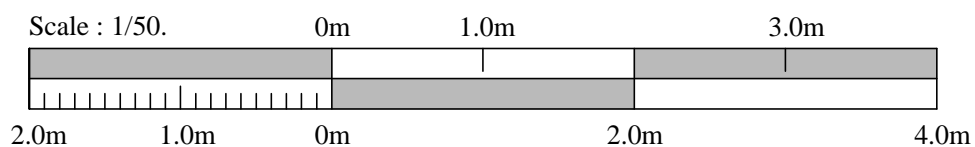


**DRAWING PLOTTED ON A3 SHEET**

### Installation of front door.

At:- 45, Victoria Street, Aberdeen.

For:- Girlguiding Aberdeen.

Drawing No.  
GG01/02.



**Chartered Institute of  
Architectural Technologists**

### Proposed west elevation.

Scale : 1/50.

Date : January 2024.

**William F. Forbes. MCIAT.**

3, Fairview Grove, Danestone, Aberdeen. AB22 8ZE.  
Tel. No. 01224 824079. Mobile No. 07786804252.