

PKA-M R32

Wall Mounted System

Mr. SLIM™

The **PKA-M** Power Inverter range is a wall mounted system that blends a host of outstanding features with a sleek design. Offering high seasonal efficiency, advanced control options, extended pipe runs as standard, this range is a flexible choice for small commercial and office applications, as well as restaurants and comms rooms.

Key Features & Benefits:

- Increased comfort levels through advanced airflow and smart defrost features
- 100m pipe run (size 100), increasing application capability
- Energy usage display available as standard with the PAR-41MAA controller
- 14°C set point option; ideal for applications where a specialist ambient condition is required (requires PAR-41MAA or PAR-SL101A-E controller)
- 'Backup and rotate' feature to reduce load on individual units and prolong product life (requires PAR-41MAA controller)
- Full heating capacity down to -3°C
- Internal pipe connection for ease of installation
- Compatible with Plasma Quad Connect - an innovative, bolt-on air purifying device which neutralises viruses, bacteria, allergens, PM2.5, mould and dust

R32






PKA-M INDOOR UNITS		PKA-M35LA2	PKA-M50LA2	PKA-M60KA2	PKA-M71KA2	PKA-M100KA2	PKA-M100KA2
CAPACITY (kW)	Heating (nominal)	4.1 (1.6-5.2)	5.0 (2.5-7.3)	7.0 (2.8-8.2)	8.0 (3.5-10.2)	11.2 (4.5-14.0)	11.2 (4.5-14.0)
	Cooling (nominal)	3.6 (1.6-4.5)	4.6 (2.3-5.6)	6.1 (2.7-6.7)	7.1 (3.3-8.1)	9.5 (4.9-11.4)	9.5 (4.9-11.4)
	Heating (UK)	3.5 (1.35-4.4)	4.25 (2.15-6.2)	5.95 (2.4-6.95)	6.8 (3.0-8.65)	9.5 (3.85-11.9)	9.5 (3.85-11.9)
	Cooling (UK)	3.3 (1.45-4.15)	4.23 (2.1-5.15)	5.5 (2.5-6.15)	6.55 (3.05-7.45)	9.2 (4.5-10.5)	9.2 (4.5-10.5)
SHF (nominal)	0.74	0.66	0.86	0.78	0.73	0.73	
COP / EER (nominal)	3.94 / 4.20	3.72 / 3.71	4.04 / 3.91	3.78 / 3.81	3.61 / 3.95	3.61 / 3.95	
SCOP (ηsh) / SEER (ηsc) (BS EN14825)	4.0 / 6.5	4.3 / 6.6	4.2 / 6.8	4.3 / 6.8	4.4 / 6.5	4.4 / 6.4	
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	A+ / A++	A+ / A++	A+ / A++	A+ / A++	A+ / A++	A+ / A++
AIRFLOW (l/s)	Lo-Mi2-Mi1-Hi	125-137-153-182	125-137-153-182	300-333-367	300-333-367	333-383-433	333-383-433
PIPE SIZE mm (in)	Gas	12.7 (1/2")	12.7 (1/2")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
	Liquid	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)	Lo-Mi2-Mi1-Hi	34-37-40-43	34-37-40-43	39-42-45	39-42-45	41-45-49	41-45-49
SOUND POWER LEVEL (dBA)		60	60	64	64	65	65
DIMENSIONS (mm)	Width x Depth x Height	898 x 237 x 299	898 x 237 x 299	1170 x 295 x 365	1170 x 295 x 365	1170 x 295 x 365	1170 x 295 x 365
WEIGHT (kg)		12.6	12.6	21	21	21	21
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4	4	4	4
WIRED REMOTE CONTROLLER REFERENCE		PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA	PAR-41MAA
WIRELESS REMOTE CONTROLLER REFERENCE		PAR-SL101A-E / PAR-FL32MA	PAR-SL101A-E / PAR-FL32MA	PAR-SL101A-E / PAR-FL32MA	PAR-SL101A-E / PAR-FL32MA	PAR-SL101A-E / PAR-FL32MA	PAR-SL101A-E / PAR-FL32MA


PUZ-ZM OUTDOOR UNITS		PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHAR2	PUZ-ZM100VKA2	PUZ-ZM100VKA2 ③
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	46 / 44	46 / 44	49 / 47	49 / 47	51 / 49	51 / 49
SOUND POWER LEVEL (dBA)	Cooling	65	65	67	67	69	69
WEIGHT (kg)		46	46	67	67	105	111
DIMENSIONS (mm)	Width x Depth x Height	809 x 300 x 630	809 x 300 x 630	950 x 330 + 25 x 943	950 x 330 + 25 x 943	1050 x 330 + 40 x 1338	1050 x 330 + 40 x 1338
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	380-415v, 50Hz
PHASE		Single	Single	Single	Single	Single	Three
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	1.040 / 0.869	1.347 / 1.239	1.732 / 1.560	2.116 / 1.863	3.102 / 2.405	3.102 / 2.405
	Heating/Cooling (UK)	0.81 / 0.84	1.12 / 1.12	1.25 / 1.65	1.54 / 1.92	2.47 / 2.06	2.47 / 2.06
STARTING CURRENT (A)		4.3	4.3	5.3	5.3	10.7	2.6
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	4.97 / 4.31 [13.4]	5.98 / 5.57 [13.4]	7.41 / 6.65 [19.4]	9.10 / 7.96 [19.4]	13.46 / 10.45 [27.1]	4.49 / 5.45 [8.6]
FUSE RATING (BS88) - HRC (A)		16	16	25	25	32	16
MAINS CABLE No. CORES		3	3	3	3	3	5
MAX PIPE LENGTH (m)		50	50	55	55	100	100
MAX HEIGHT DIFFERENCE (m)		30	30	30	30	30	30
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) - 30m		2.00 / 1.35 (30m)	2.00 / 1.35 (30m)	2.80 / 1.89 (30m)	2.80 / 1.89 (30m)	3.60 / 2.43 (40m)	3.60 / 2.43 (40m)
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)		0.30 / 0.20	0.30 / 0.20	0.80 / 0.54	0.80 / 0.54	2.40 / 1.62	2.40 / 1.62

③ Three Phase

PKA-M35/50LA DIMENSIONS

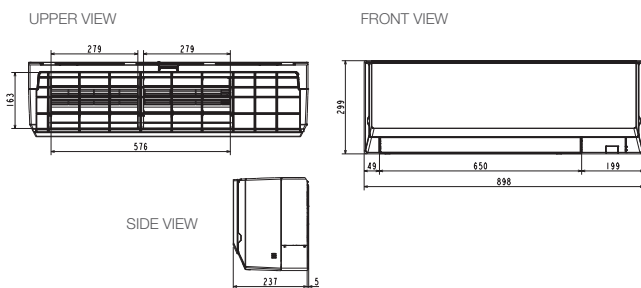

PKA-M60/71/100KA DIMENSIONS

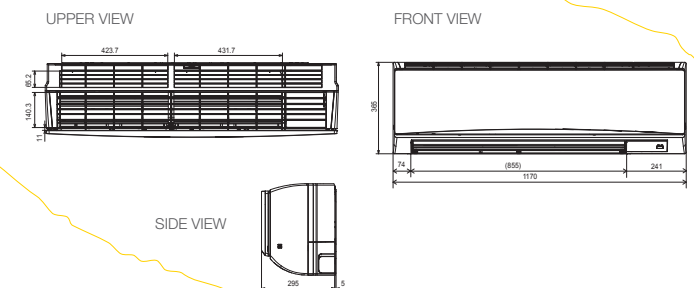

SUZ-M / PUZ-M OUTDOOR UNITS		SUZ-M35VAR2	SUZ-M50VAR2	SUZ-M60VAR2	SUZ-M71VAR1	PUZ-ZM100VKA2	PUZ-ZM125VKA2	PUZ-ZM140VKA2
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	48 / 48	48 / 49	49 / 51	49 / 51	51 / 54	54 / 56	55 / 57
SOUND POWER LEVEL (dBA)	Cooling	59	64	65	66	70	72	73
WEIGHT (kg)		35	41	54	56	76	84	84
DIMENSIONS (mm)	Width x Depth x Height	800 x 285 x 550	800 x 285 x 714	840 x 330 x 880	840 x 330 x 880	1050 x 330 x 981	1050 x 330 x 981	1050 x 330 x 981
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	1.025 / 0.923	1.463 / 1.351	1.842 / 1.694	2.105 / 2.028	2.947 / 2.878	3.739 / 4.019	4.155 / 4.768
	Heating/Cooling (UK)	0.85 / 0.84	1.24 / 1.19	1.50 / 1.56	1.87 / 1.72	2.35 / 2.47	3.32 / 3.41	3.69 / 4.05
STARTING CURRENT (A)		5.0	5.7	7.6	10.0	7.1	2.9	2.9
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	3.69 / 3.64 [9.7]	5.38 / 5.18 [14.9]	6.54 / 6.78 [16.7]	8.15 / 7.47 [16.7]	10.23 / 10.75 [22.3]	14.43 / 14.81 [27.8]	16.06 / 17.62 [31.4]
FUSE RATING (BS88) - HRC (A)		16	20	20	20	32	32	40
MAINS CABLE No. CORES		3	3	3	3	3	3	3
MAX PIPE LENGTH (m)		20	30	30	30	55	65	65
MAX HEIGHT DIFFERENCE (m)		12	30	30	30	30	30	30
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) - 30m		0.90 / 0.61 (7m)	1.20 / 0.81 (7m)	1.25 / 0.84 (7m)	1.45 / 0.98 (7m)	3.10 / 2.09 (30m)	3.60 / 2.43 (30m)	3.60 / 2.43 (30m)
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)		1.16 / 0.78	1.66 / 1.12	1.71 / 1.15	2.37 / 1.80	4.10 / 2.77	5.00 / 3.38	5.00 / 3.38

Effective as of September 2023

