


**Elevation on New Wall / Gates at Field Entrance Off Brookhampton Lane**  
(Not to Scale)

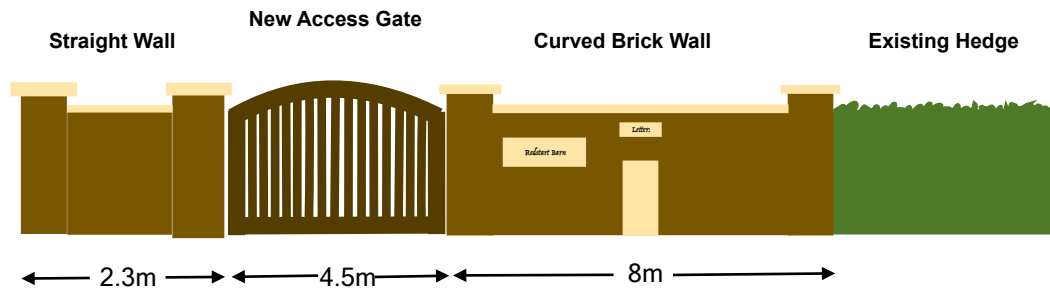

**Elevation on New Wall / Gates at Courtyard Entrance on Private Road**  
(Not To Scale)

### Notes

1. All Brickwork to be reclaimed local heritage brick
2. All Mortar to be lime mortar consisting 2.5 to 1 mix. (NHL 5)
3. Copings to walls and piers to be natural stone.
4. New Gates to be enclosed double leaf in timber or steel
5. New Farm Gate to be Galvanised steel or timber 5 bar.
6. Brickwork wall height to be 2m, with 2.2m brick piers.
7. Brick wall to be 225mm (9") wide in English Garden Wall bond.
8. Brick piers to be constructed square at 560mm (22")
9. Brick piers to have central steel I section embedded into foundation
10. Curved brick walls to have intermediate wall thickening piers
11. Wall thickening piers to be at approx 3m c/c and be 330mm (13")
12. Brick walls to bear onto a C35 concrete strip footing.
13. For safety and security brick piers either side of gates to be uplit

PROJECT	Redstart Barn	TF13 6LN
CLIENT	David Dobson	
TITLE	Wall Elevations	
SCALE	Approx 1:200	
DATE	29th January 2024	
DRAWING	DJD/007A	