



Replica and Sympathetic Replacements, Period by Design.

In addition to our upgrading service, we can also manufacture and install new gas filled double glazed sashes to match the existing, into your **original** box frames or if the frames have been removed, we can also replace them.

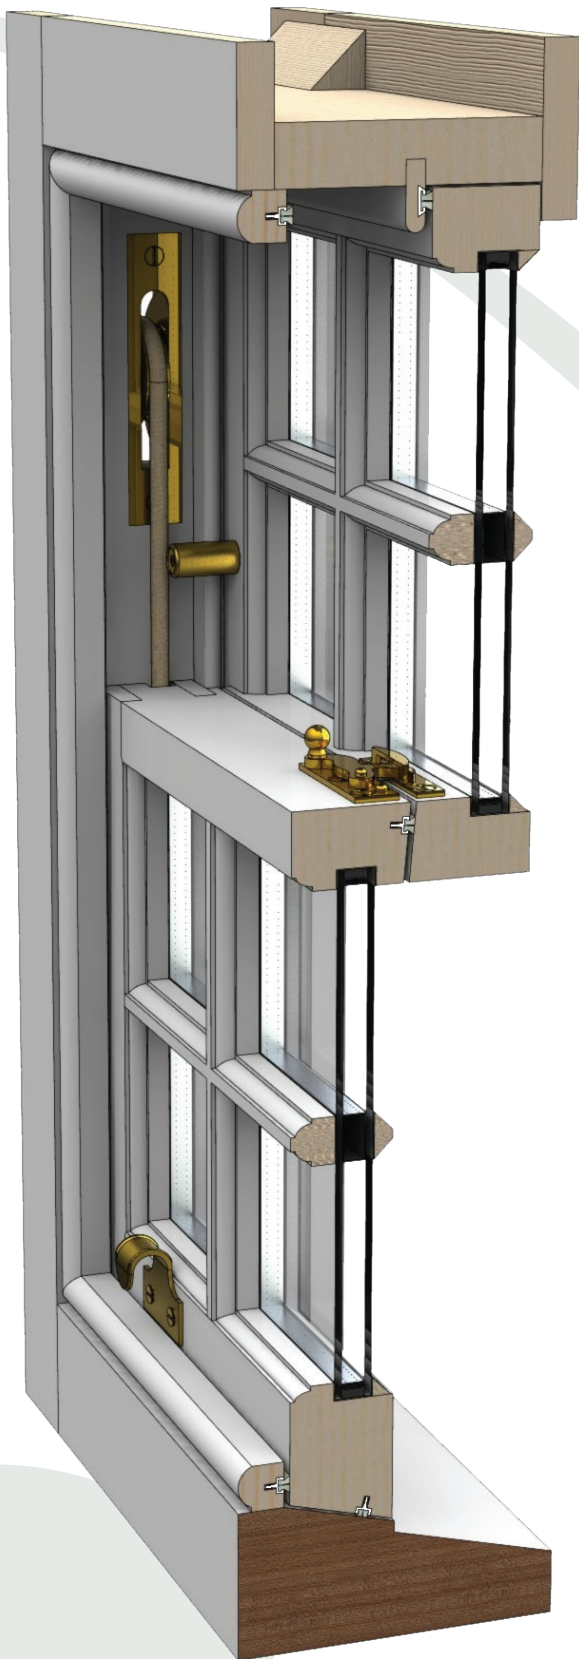

All of our windows are bespoke. We can replicate original section sizes, mouldings, horn details and slim period glazing bars.

Our new sashes are constructed in the traditional way with glued mortice and tenon joints for strength and longevity. New box frames are constructed with a traditional pulley and weight system. New windows are equipped with traditional replica ironmongery available in various finishes.

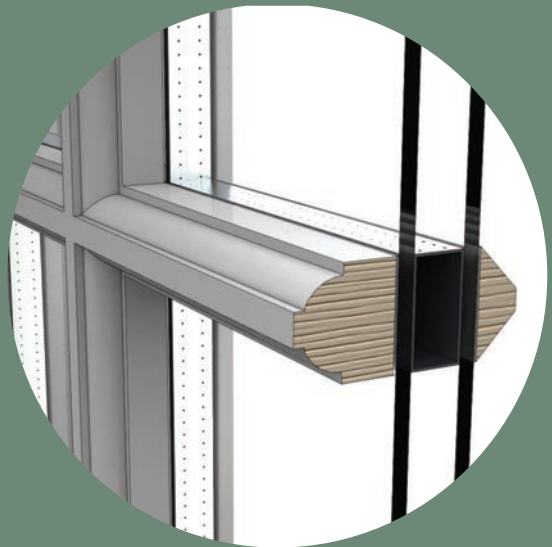

Simulated divided lights to visually match original glazing bars. No thermal breaks around the perimeter of the glazing bars. Discreet double glazing with white back to back spacer bars, period mouldings and outer beads to match angled putty lines.

Sliding Sash Solutions preferred method of double glazing is with the use of simulated divided lights to achieve a more period appearance, greater longevity and less thermal breaks around the perimeter of the sashes.