

Design and Project Management Consultants

Trackways Construction

For the proposed Trackways at :-

Dick Whittington Park,
Little London,
Longhope,
GL17 0PH.



Design and Project Management Consultants

Introduction

This application seeks to obtain permission for the installation of proposed Trackways around the Dick Whittington Leisure Park.

Construction and Materials for the Hardcore Tracks


The proposed trackways will be 3 metres wide.

The ground level will be dug to an average depth of 0.45 metres deep to form a trench.

The trench will be filled with a compacted sub-base of gravel and small rock hardcore to a depth of 0.4 mt. The top surface of the track will then be finished with a mix of finer gravels (18mm to dust) to a depth of 55mm, which will be compacted into a slight Convex finish.

The spoil soil will be used to form a haunched profile along the sides of the trackway, the shape and amount depending on the natural ground contours.

Any track runoff will be naturally diverted onto the surrounding grassland.

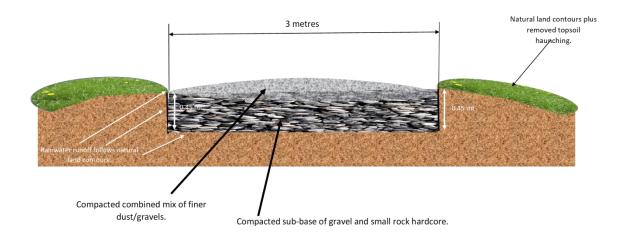

<u>Trackways Construction</u>

<u>1/20 at A3</u>

There will be no plastic membrane laid along the base of the track. Considering the metre length of the trackways this represents a considerable reduction to the potential plastic pollution around the site.

The picture below is neither completely design accurate nor drawn to scale. It gives a general idea of the trackways positioning only, across the existing landscape. (For accurate positioning please refer to the Block Plan)

The view looks East from the existing road which travels from South to North through Dick Whittington Park.







Design and Project Management Consultants