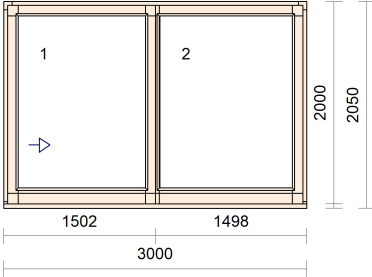



Pos.	Quantity	Description	Price	Total price
1	1 Pc(s)	 <p>Reference: D1 Dimensions: 3000mm x 2050mm (including threshold) Profile type: Alu-clad profile MARCONI MAX Wood: Pine jointed Frame: 181x56mm + Lift & Slide door threshold 50mm below FFL Alu-clad: Quadrat Color in/out: Clear varnish SW2 / RAL 6029 Mint Green (RAL std.) Sash: Lift & Slide door sash active; Lift & Slide door sash FIX Lift & Slide door type A (Left panes active - internal view) Fitting: Lift & slide to right; Fixed in frame Glazing: 2* 4ESG/16/4ESG/16/4ESG, Ar, CHU, Ug=0.6 W/m2K - Toughened safety glass Accessories: Lift & Slide door handle and lock inside only; pull plate outside (included) - F1 Silver colour Kit form (extra) View: As seen from inside</p>		

1.1 1 pc(s) Due to the extra size of the product and the level of protection required, the product is supplied in a Kit Form. After the production has been completed, the door is carefully dismantled in the factory, all parts are individually packed to ensure maximum safety and to avoid the increased risk of damage during transport.

2	1 Pc(s)	 <p>Reference: D2 Dimensions: 2800mm x 2050mm (including threshold) Profile type: Alu-clad profile MARCONI MAX Wood: Pine jointed Frame: 181x56mm + Lift & Slide door threshold 50mm below FFL Alu-clad: Quadrat Color in/out: Clear varnish SW2 / RAL 6029 Mint Green (RAL std.) Sash: Lift & Slide door sash active; Lift & Slide door sash FIX Lift & Slide door type A (Left panes active - internal view) Fitting: Lift & slide to right; Fixed in frame Glazing: 2* 4ESG/16/4ESG/16/4ESG, Ar, CHU, Ug=0.6 W/m2K - Toughened safety glass Accessories: Lift & Slide door handle and lock inside only; pull plate outside (included) - F1 Silver colour Kit form (extra) View: As seen from inside</p>		
---	---------	--	--	--