


Specification

1. BF - 26 Twin chord Beaming providing support over failing lintels
2. BF - 25 Twin chord Beaming & Cem Flex ties providing support to the base of the wall as a ground beam.
3. BF - 24 Twin chord internal wall detail.
4. BF - 01 Single bar crack stitching.
5. CF - 08 Cem Flex tie pinning to arch stone.
6. CF - 01 Cem Flex tie de-lamination repair to rubble filled stone work.
7. BO-01/02 Bow Flex ties (not shown as provisional pending further investigation) Lateral restraint ties.
8. All bars installed with Bond Flex thixotropic grout
9. All chases & holes left a minimum of 25mm back from the face of the masonry for pointing with a lime based mortar by others.

NOTES

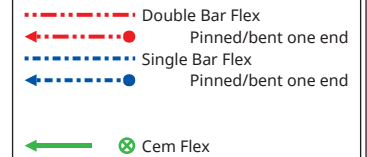

PROJECT

Wonham Barton
Wonham,
Bampton,
Tiverton
Devon EX16 9JZ

TITLE



Puffin, Manor Park, Kingsbridge,
Devon, TQ7 1BB
01392 409 541
southwest@targetstructural.co.uk
www.targetstructural.co.uk

DRN	CRL	SCALE	nts	PAGE
CHKD		DATE		

REF
SW-20230613-02