

CHE/23/00106/FUL 366 Brimington Road

External materials specification

As per planning condition 7 please find below specification and examples of external materials to be used on the 366 Brimington Road Extension.

- 1) The sides of the extension will be 73mm Carlton brick or similar to match existing colour
<https://www.travisperkins.co.uk/facing-bricks/carlton-facing-brick-clayburn-civic-73mm-pack-of-464/p/880760>



Technical specification

Height	73 mm	Pattern	Multi
Length	215 mm	Width	102.50 mm
Colour	Red	Colour Family	Reds
Texture	Light Texture	Manufacturing Process	Wirecut
Pack Quantity	464	Type	Facing Brick
Range Description	Facing Bricks	Brand Name	Carlton
Made To Order	N		

- 2) In relation to the bricks below DPC these will be perforated red engineering bricks.
https://www.wickes.co.uk/Marshalls-Red-Perforated-Engineering-Brick--215-x-100-x-65mm/p/252223?fix&gad_source=1&gclid=Cj0KCQiAzoeuBhDqARIsAMdH14Hu02OU-OoXfAZYBBefDLiM3Tp577YpWvJHNktbamdYfjirldFPAYAAoorEALw_wcB&gclsrc=aw.ds




Product details

Height: 65 mm
Length: 215 mm
Width: 100 mm
Weight: 2.60 kg
Colour: Red
Colour Family: Reds

Suitable for: Above & below DPC & facing brick
Durability: Suitable for use in sulphate soil conditions up to and including DS-1, DS-2 and DS-3. The perforated engineering may be suitable up to DS-4 conditions subject to satisfying the other criteria laid down in the relevant BRE special digest
Compressive Strength: 50KN
Water Absorption Rating: <6%
Texture: Smooth
Factory: Marshalls

Pack Quantity: 1
Type: Engineering brick
Country Origin: UK
Brand Name: Marshalls
Range Description: Building Materials

- 3) The external rear wall of the extension will be block with Heritage White Monocouche render. Web site - <https://monocouche.co.uk/portfolio/monocouche-xf-heritage-white>

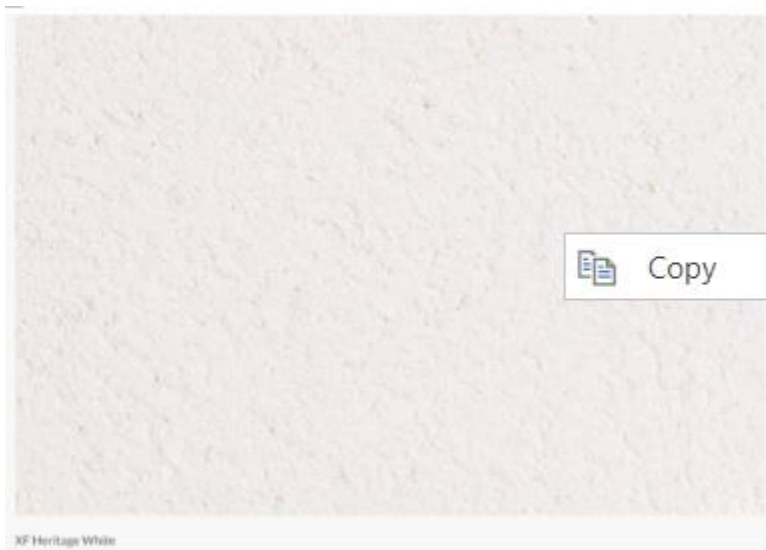

- 4) The slate for the roof will be the Polaris Developer (First Grade) Spanish slate which is a Black/Grey slate or similar. W1-S1-T1 Certified & 100-year Quarry-backed Guarantee. <https://buyroofslate.co.uk/slate/spanish-roof-slate/500x250/polaris-developer-first-500x250/>



The Polaris Developer (First Grade) Spanish slate is a hassle-free Black/Grey slate. 5mm in thickness and consistent in appearance with very little grading needed. This is a first-grade slate and will compliment any structure. The subtle textured appearance gives it a traditional finish, making it ideal for any project with slate specified.