DES020558
22/01/2024
This indicative drawing is intended to give an overall impression of a surface water management design using the ACO range of products and accessories.
Unless otherwise stated in writing, the drawing is not intended as a final, fully detailed working document. Accordingly critical or leading dimensions should not be scaled from this drawing.
This drawing should, however, be read in conjunction with the relevant ACO literature and current British and other relevant standards for specific guidance on the detailing of units.
ACO offers advice to aid designers in the use of ACO products. The indicative drawings are based solely on the information provided to ACO. The drawings should not be offered for construction purposes. It is the responsibility of the consulting engineer or designated Principal Designer to check and ensure the drawings meet their requirements. For clarity, ACO does not under any circumstance act as a project designer or the Principal Designer [as defined in Construction (Design and Management) Regulations 2015: Regulation 5(1)(a)].
Any queries regarding technical comment should be addressed to the ACO Design Services team on 01462 816666.

ACO Legend
ACO MultiDrain
ACO Outlet

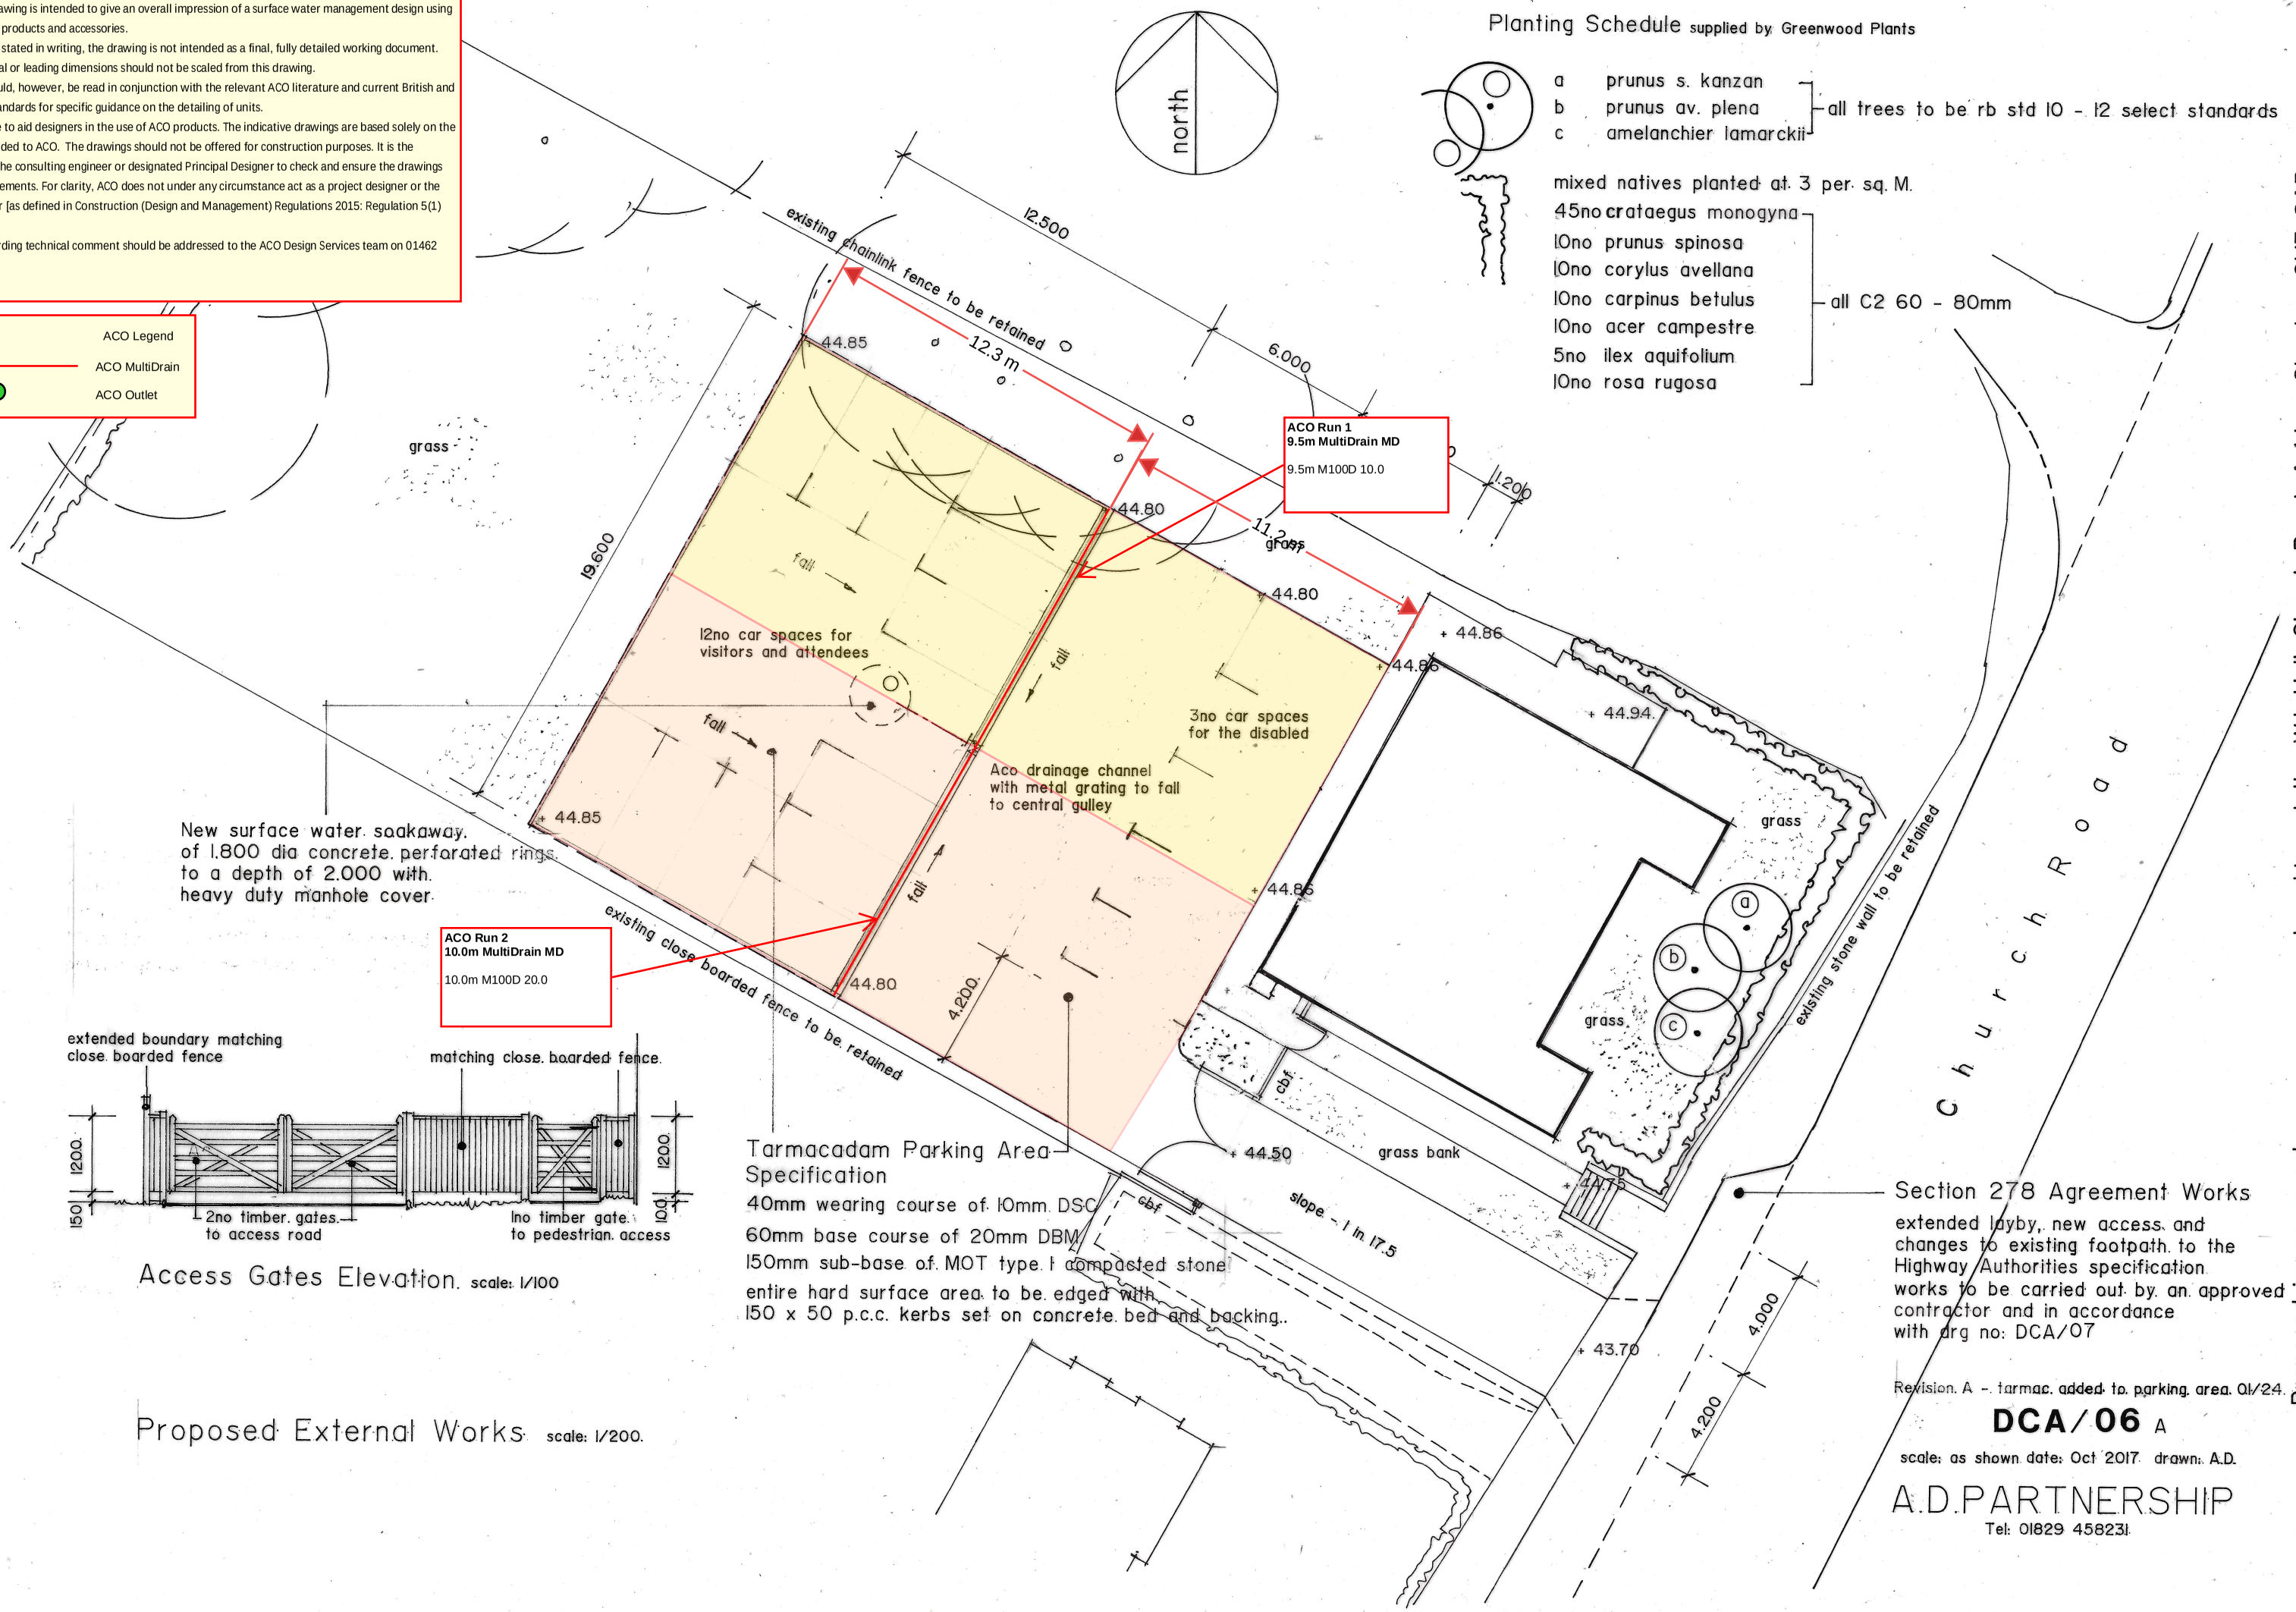

Planting Schedule supplied by Greenwood Plants

a	prunus s. kanzan	all trees to be rb std 10 - 12 select standards
b	prunus av. plena	
c	amelanchier lamarckii	

mixed natives planted at 3 per sq. M.

45no	crataegus monogyna	all C2 60 - 80mm
10no	prunus spinosa	
10no	corylus avellana	
10no	carpinus betulus	
10no	acer campestre	
5no	ilex aquifolium	
10no	rosa rugosa	

extended boundary matching close boarded fence
matching close boarded fence
1200
150
1200
100
2no timber gates to access road
1no timber gate to pedestrian access

Access Gates Elevation scale: 1/100

Tarmacadam Parking Area Specification
40mm wearing course of 10mm DSC
60mm base course of 20mm DBM
150mm sub-base of MOT type 1 compacted stone
entire hard surface area to be edged with 150 x 50 p.c.c. kerbs set on concrete bed and backing..

Section 278 Agreement Works
extended layby, new access and changes to existing footpath to the Highway Authorities specification works to be carried out by an approved contractor and in accordance with drg no: DCA/07

Revision A - tarmac added to parking area 01/24.

DCA/06 A

scale: as shown date: Oct 2017 drawn: A.D.

A.D.PARTNERSHIP
Tel: 01829 458231

Proposed External Works scale: 1/200.

Proposed improvements, new access and parking at the W.I. Hall, Church Road, Ashton, Chester, CH3 8AB