







TREE HEALTH ASSESSMENT

AT

49 BOLD LANE **AUGHTON**

> Author: C Salisbury Date: 17 February 2024

Ref: TRE/49BLA



Mulberry
Adamson House, Towers Business Park, Wilmslow Road, Didsbury, M20 2YY

0161 955 3628

0161 955 4201

info@mulberrytmc.co.uk

www.mulberrytmc.co.uk

1.0 Introduction

- 1.1 This report was commissioned by Richie & Claire Woods and its purpose was to carry out a site visit and to make a visual assessment two trees within the boundary of the site as shown on the site plan within Appendix Two.
- 1.2 This document provides details of their condition and recommendations for management and should be read in conjunction with the data tables of Appendix One and site plan of Appendix Two.
- 1.3 The survey on which the findings of this report are based was undertaken on Friday 09 February 2024.
- 1.4 The limitations of this report are restricted to the persons, time, information made available and purpose for which this report has been prepared.

2.0 Findings

- 2.1 Both trees were visually assessed. The results are clearly described in the data table of Appendix One and plan of Appendix Two.
- 2.2 To give assistance in reading the findings the following glossary has been produced.

Arboricultural Glossary of Terms

The following terms are concurrent with best Arboricultural practice and within the guidelines set by the International Society of Arboriculture (ISA), the Arboricultural Association (AA) and the British Standards Institute (BSI).

Age Range: Age is site specific and categorised:

Young (Y) Out-planted trees that have not yet established.

Semi-Mature (SM) Established trees up to 1/3 of expected height and crown.

Early Mature (EM) Between 1/3 and 2/3 of expected height and crown.

Mature (M) Between 2/3 and full expected height and crown.

Fully Mature (FM) Full expected height and crown.

Over Mature (OM) Crown beginning to break-up and decrease in size.

Senescent (S) Crown in advanced stage of break-up.

Height: Height was estimated and recorded in five metre intervals.

Condition: Assessment of current physiological condition and structural morphology incorporating vigour and vitality and categorised:

- A Tree needing little, if any attention
- B Tree with minor, but rectifiable defects, or in the early stages of physiological stress
- C Tree with significant structural and physiological flaws and/or extremely stressed
- D Tree that is dead, biologically/physically moribund or dangerous

Priority Rating:

- 1 High Action should be taken immediately.
- 2 Moderate Work should be implemented in a programme of works within a period of 6 months.
- 3 Low Work that would benefit the trees which is not essential, but should be implemented if funding becomes available.

Definition of Physiological & Morphological Terms

Adaptive Growth - The process whereby wood formation is influenced both in quantity and in quality by the action of gravitational force and mechanical stresses on the cambial zone.

Bifurcation – Forked or divided union.

Brown Rot - Form of decay where cellulose is degraded, while lignin is only modified.

Cankers (target or tumerous) - A localised area of dead bark and cambium on a stem or branch, caused by fungal or bacterial organisms, characterised by woundwood development on the periphery. This may be annual or perennial.

Cavity - An open wound, characterised by the presence of extensive decay and resulting in a hollow.

Chlorotic Leaf - Lacking in chlorophyll, typically yellow in colour.

Compartmentalisation - The physiological process that creates the chemical and mechanical boundaries that act to limit the spread of disease and decay organisms.

Crack - Longitudinal spilt in stem or branch, involving bark and/or underlying wood. These may be vertically and horizontally orientated.

Decay - Process of degradation of woody tissues by fungi and bacteria through decomposition of cellulose and lignin.

Deadwood - Deadwood is often present within the crown or on the stems of trees. In some instances is may be an indication of ill health, however, it may also indicate natural growth processes. If a target is present beneath the tree, deadwood may fall and cause injury or damage and should be removed, otherwise deadwood can remain intact for conservation purposes (insects, fungi, birds etc.).

End Weight - The concentration of foliage at the distal ends of stems and deficient in secondary branches.

Girdling Root - Root which circles and constricts the stem or roots causing death of phloem and/or cambial tissue.

Hazard Beam - An upwardly curved branch in which strong internal stresses may occur without the compensatory formation of extra wood (longitudinal splitting may occur in some cases).

Included Bark Union - Pattern of development at branch junctions where bark is turned inward rather than pushed out. Potential weakness due to a lack of a woody union.

Ivy Growth - Ivy growth may ascend into the tree's crown, increasing wind resistance, concealing potential defects and reducing the tree's photosynthetic capacity. Ivy growth is often acceptable in woodland areas as a conservation benefit.

Live Crown Ratio - The relative proportion of photosynthetic mass (leaf area) to overall tree height.

Reaction Wood - Specialised secondary xylem, which develops in response to a lean or similar mechanical stress, attempting to restore the stem to the vertical.

Root Plate Lift - The physical movement of the rooting plate causing soils to shift and crack. May occur during adverse weather conditions. Trees may become unstable.

Structural Defect - Internal or external points of weakness, which reduce the stability of the tree.

Suppressed - Trees which are dominated by surrounding vegetation and whose crown development is restricted from above.

Topping - A highly disfiguring practise, likely to cause severe xylem dysfunction and decay in major structural parts of the wood.

White Rot - Form of decay where both cellulose and lignin are degraded.

Wound - Any injury, which induces a compartmentalisation response.

Woundwood - Wood with atypical anatomical features, formed in the vicinity of a wound and a term to describe the occluding tissues around a wound as opposed to the ambiguous term "callus."

Woodland Structure - The vertical and horizontal arrangement of trees within a group or woodland i.e. Dominant - trees with a crown above the upper layer of the canopy, Co dominant - trees that define the general upper edge of the canopy, Intermediate - trees that have been largely overgrown by others, Suppressed - trees that have been overgrown and occupy an under storey position and grow slowly, often severely asymmetrical.

Note: The definitions described above, may not necessarily be included within the Arboricultural Survey Data.

3.0 Recommendations

3.1 It is recommended that all works to the trees be carried out in accordance with the data table of Appendix One in order to bring them into good management and continue long-term tree cover in this area. These works can be summarised as follows:

Priority	Prune	Fell
1	-	T1
2	-	-
3	-	T2

- 3.2 All tree work undertaken should be done in accordance with British Standard 3998:2010 and by competent contractors insured with public liability cover of at least two million pounds.
- 3.3 If the trees on site are subject to any Tree Preservation Orders (TPO's) or are encompassed within a Conservation Area then statutory permission from the Local Planning Authority (LPA) will be required before any tree works take place.
- 3.4 All operations should take account of wildlife needs and be planned to take advantage of weather conditions and time of year for minimum damage and disturbance. If any protected species or nesting birds are present or discovered while the works are taking place all work should cease until contact has been made with Natural England for further advice. Natural England can be contacted on 0845 600 3078 or by e-mail to: enquiries@naturalengland.org.uk. Specific consideration should be given to the possible presence of roosting bats, which are protected by the Wildlife and

Countryside Act 1981 (schedule 5) and included in schedule 2 of the Conservation Regulations 1994. Ideally, a survey should be carried out to identify any potential roost sites and if bats are found to be present advice should be sought form a person qualified and experienced in handling such matters and fully conversant with the implications of the Act

3.5 It is recommended that a repeat survey of all the trees within the site should be carried out every year.

APPENDIX ONE

Survey Data

Tree No.	Species	Height (m)	Age	Condition Rating	Comments and Recommendations	Priority Rating
T1	Beech	21+	FM	C/D	A co-dominant specimen situated within the rear garden of a residential property with extensive stem and basal decay which has been colonised by Ganoderma spp- Fell	1
T2	Lime	21+	M/F M	В	A co-dominant specimen situated adjacent to a highway with the side garden of a residential property. This tree is causing extensive root damage to the adjacent driveway from incremental root growth. Efforts have been made to repair the damage to allow the retention of the tree but further damage continues to worsen. Furthermore, the tree has previously caused extensive damage to the boundary wall which require it to be rebuilt. Despite the repair works identified above there is still considerable ongoing damage to drive, steps and patio. It is therefore felt that removal of the tree is the only remaining option- Fell	3

Recommended works should be carried out to the British Standard Recommendations for Tree Work, BS 3998 : 2010




T1 - Images displaying extent of stem decay and the presence of Ganoderma spp.



Images of previous and ongoing tree root damage from the incremetal root growth of T2 despite previous efforts to repair the damage



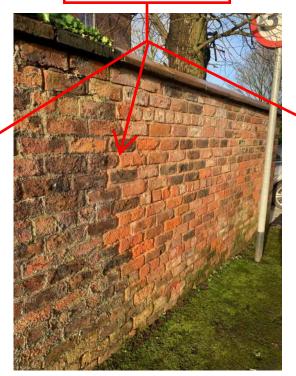



APPENDIX TWO

Site Plan