

USE OF DRAWINGS


DO NOT SCALE FROM THIS DRAWING. USE WRITTEN DIMENSIONS AND CHECK ON SITE. THIS DRAWING IS BASED ON SITE INFORMATION SUPPLIED BY THIRD PARTIES AND ACCURACY OF EXISTING FEATURES IS NOT GUARANTEED. ANY ERROR, OMISSION OR DISCREPANCY NOTED ON OR BETWEEN DRAWINGS AND OTHER DOCUMENTS MUST BE REPORTED IN WRITING IMMEDIATELY. ALL MECHANICAL, ELECTRICAL AND STRUCTURAL LAYOUTS / COMPONENTS ARE INDICATIVE AND MUST BE DESIGNED AND CHECKED BY SPECIALISTS. DO NOT START WORK ON SITE BEFORE CONFIRMING THAT ALL NECESSARY STATUTORY AND OTHER CONSENTS HAVE BEEN OBTAINED. THIS DRAWING IS COPYRIGHT AND MUST NOT BE DISTRIBUTED WITHOUT PERMISSION. ELECTRONIC CAD FILES MUST NOT BE ALTERED OR COPIED.

REVISIONS

REV	DATE	DESCRIPTION	CHECKED
F	29.09.2022	FOR CONSTRUCTION	JF CL
G	09.11.2022	FOR CONSTRUCTION	JF CL
H	12.05.2023	FOR CONSTRUCTION	JF
I	15.06.2023	FOR CONSTRUCTION	OC JF
J	14.08.2023	FOR CONSTRUCTION	OC JF

KEY

- WALL TYPE NOTE:**
WALL TYPES TO BE READ IN CONJUNCTION WITH ARCHITECTURAL SPECIFICATION & DOOR SCHEDULE / DETAILS 1693-C-8040, 1693-C-8041, 1693-C-8001, 1693-C-8002 & 1693-C-8003
- (WT-01) WALL TYPE 01 30MIN FIRE RATED GYPSUM PARTITION BUILT FROM SLAB LEVEL TERMINATING AT UNDERSIDE OF STRUCTURAL SOFFIT. ACOUSTIC PERFORMANCE 36dB SOUND RESISTANCE.
 - (WT-02) WALL TYPE 02 30MIN FIRE RATED GYPSUM PARTITION BUILT FROM SLAB LEVEL TERMINATING AT UNDERSIDE OF STRUCTURAL SOFFIT. ACOUSTIC PERFORMANCE 42dB SOUND RESISTANCE.
 - (WT-03) WALL TYPE 03 60MIN FIRE RATED GYPSUM PARTITION BUILT FROM SLAB LEVEL TERMINATING AT UNDERSIDE OF STRUCTURAL SOFFIT. ACOUSTIC PERFORMANCE 42dB SOUND RESISTANCE.
 - (WT-04) WALL TYPE 04 wet/wet ACOUSTIC PERFORMING GYPSUM PARTITION BUILT FROM SLAB LEVEL TERMINATING AT UNDERSIDE OF STRUCTURAL SOFFIT. ACOUSTIC PERFORMANCE 45dB SOUND RESISTANCE. MOISTURE RESISTANT BOARD AT TOILETS SIDE
 - (WT-05A) WALL TYPE 05A 30MIN FIRE RATED EXISTING CORE WALLS / COLUMNS WITH 1 LAYER 12.5MM WALLBOARD LINING AND PLASTER SKIM FINISH.
 - (WT-05B) WALL TYPE 05B EXISTING CORE WALLS / COLUMNS LINED WITH 90MM ROCKWOOL INSULATION FRICION FIXED BETWEEN 70MM STUDS, WITH 1 LAYER 12.5MM WALLBOARD LINING AND PLASTER SKIM FINISH. TO ACHIEVE 30MIN FIRE RATED.
 - (WT-06) WALL TYPE 06 NON FIRE RATED EXISTING WALLS WITH 1 LAYER 12.5MM WALLBOARD LINING AND PLASTER SKIM FINISH.
 - (WT-07) WALL TYPE 07 MEDIUM DENSITY FAIR FACED BLOCKWORK 1HR FR RATED WITH 50MM ROCKWOOL INSULATION BETWEEN STUDS AND 1 LAYER 12.5MM WALLBOARD TO INTERNAL FACE.
 - (WT-08A) WALL TYPE 08A ROCKWOOL INSULATED CORRUGATED WALL PANEL.
 - (WT-08B) WALL TYPE 08B ROCKWOOL INSULATED CORRUGATED WALL PANEL WITH ACOUSTIC LOUVRES FIXED TO EXTERNAL SIDE.
 - (WT-09) WALL TYPE 09 ACOUSTIC LOUVRES ON PEDESTAL SYSTEM AT CENTRES TO BE ADVISED BY MANUFACTURER.
 - (WT-10) WALL TYPE 10 30MIN FIRE RATED EXISTING CORE WALLS WITH 1 LAYER 12.5MM WALLBOARD LINING AND PLASTER SKIM FINISH.
 - (WT-11A) WALL TYPE 11A 30MIN FIRE RATED EXISTING CORE WALLS WITH 1 LAYER 12.5MM WALLBOARD LINING AND PLASTER SKIM FINISH.
 - (WT-11B) WALL TYPE 11B EXISTING CORE WALLS LINED WITH 90MM ROCKWOOL INSULATION FRICION FIXED BETWEEN 70MM STUDS, WITH 1 LAYER 12.5MM WALLBOARD LINING AND PLASTER SKIM FINISH. TO ACHIEVE 30MIN FIRE RATED.
 - (WT-12A) WALL TYPE 12A 1 LAYER 12.5MM GYPSUM WALLBOARD LINING TO SFS SYSTEM
 - (WT-12B) WALL TYPE 12B 30MIN FIRE RATED 2 LAYERS 19MM GYPSUM WALLBOARD LINING TO SFS SYSTEM
 - (WT-12C) WALL TYPE 12C 30MIN FIRE RATED 2 LAYERS 12.5MM GYPROC FRELINING LINING TO SFS SYSTEM
 - (WT-13A) WALL TYPE 13A - NEW COLUMN ENCASEMENT
 - (WT-13B) WALL TYPE 13B - NEW COLUMN ENCASEMENT WITH FIRELINE LINING
 - (WT-14) WALL TYPE 14 - 120MIN FR NEW SHAFT WALL
 - (WT-15) WALL TYPE 15 - 90MIN FIRE RATED GYPSUM PARTITION BUILT FROM SLAB LEVEL TERMINATING AT UNDERSIDE OF STRUCTURAL SOFFIT. ACOUSTIC PERFORMANCE 40dB SOUND RESISTANCE.
 - (WT-16) WALL TYPE 16 - 90MIN FIRE RATED TRIMO PANELS.
 - (WT-17A) WALL TYPE 17A - 90MM ROCKWOOL INSULATION BETWEEN STUDS, GLASROC H TILEBACKER BOARD, WITH WATERPROOFING TO BACK.
 - (WT-17B) WALL TYPE 17B - 140MM ROCKWOOL INSULATION BETWEEN STUDS, GYPROC MOISTURE RESISTANT BOARD, WITH WATERPROOFING TO BACK.
 - (WT-18) WALL TYPE 18 - 120MIN FIRE RATED FAIR FACED BLOCKWORK AND PLASTER SKIM FINISH TO INTERNAL FACE.
 - (WT-19) WALL TYPE 19 - 120MIN FIRE RATED FAIR FACED BLOCKWORK WITH 90MM ROCKWOOL INSULATION BETWEEN STUDS AND 1 LAYER 12.5MM WALLBOARD TO INTERNAL FACE.
 - (WT-20A) WALL TYPE 20A - 30MIN FIRE RATED MOISTURE RESISTANT GLASROC TILEBACKER PARTITION BUILT FROM SLAB LEVEL TERMINATING AT UNDERSIDE OF STRUCTURAL SOFFIT.
 - (WT-20B) WALL TYPE 20B - 30MIN FIRE RATED MOISTURE RESISTANT GYPSUM PARTITION BUILT FROM SLAB LEVEL TERMINATING AT UNDERSIDE OF STRUCTURAL SOFFIT.
 - (WT-21) WALL TYPE 21 - 140MM SOLID DENSE BLOCKWORK.
 - (WT-22) WALL TYPE 22 - 215MM SOLID DENSE BLOCKWORK.
 - (WT-23) WALL TYPE 23 - 120MIN FIRE RATED GYPSUM PARTITION BUILT FROM SLAB LEVEL TERMINATING AT UNDERSIDE OF STRUCTURAL SOFFIT. 70MM STUD
 - (WT-24) WALL TYPE 24 - SINGLE METAL FRAMED LINING SYSTEM FIXED TO EXISTING WALL (BLOCK/CONCRETE SUBSTRATE).

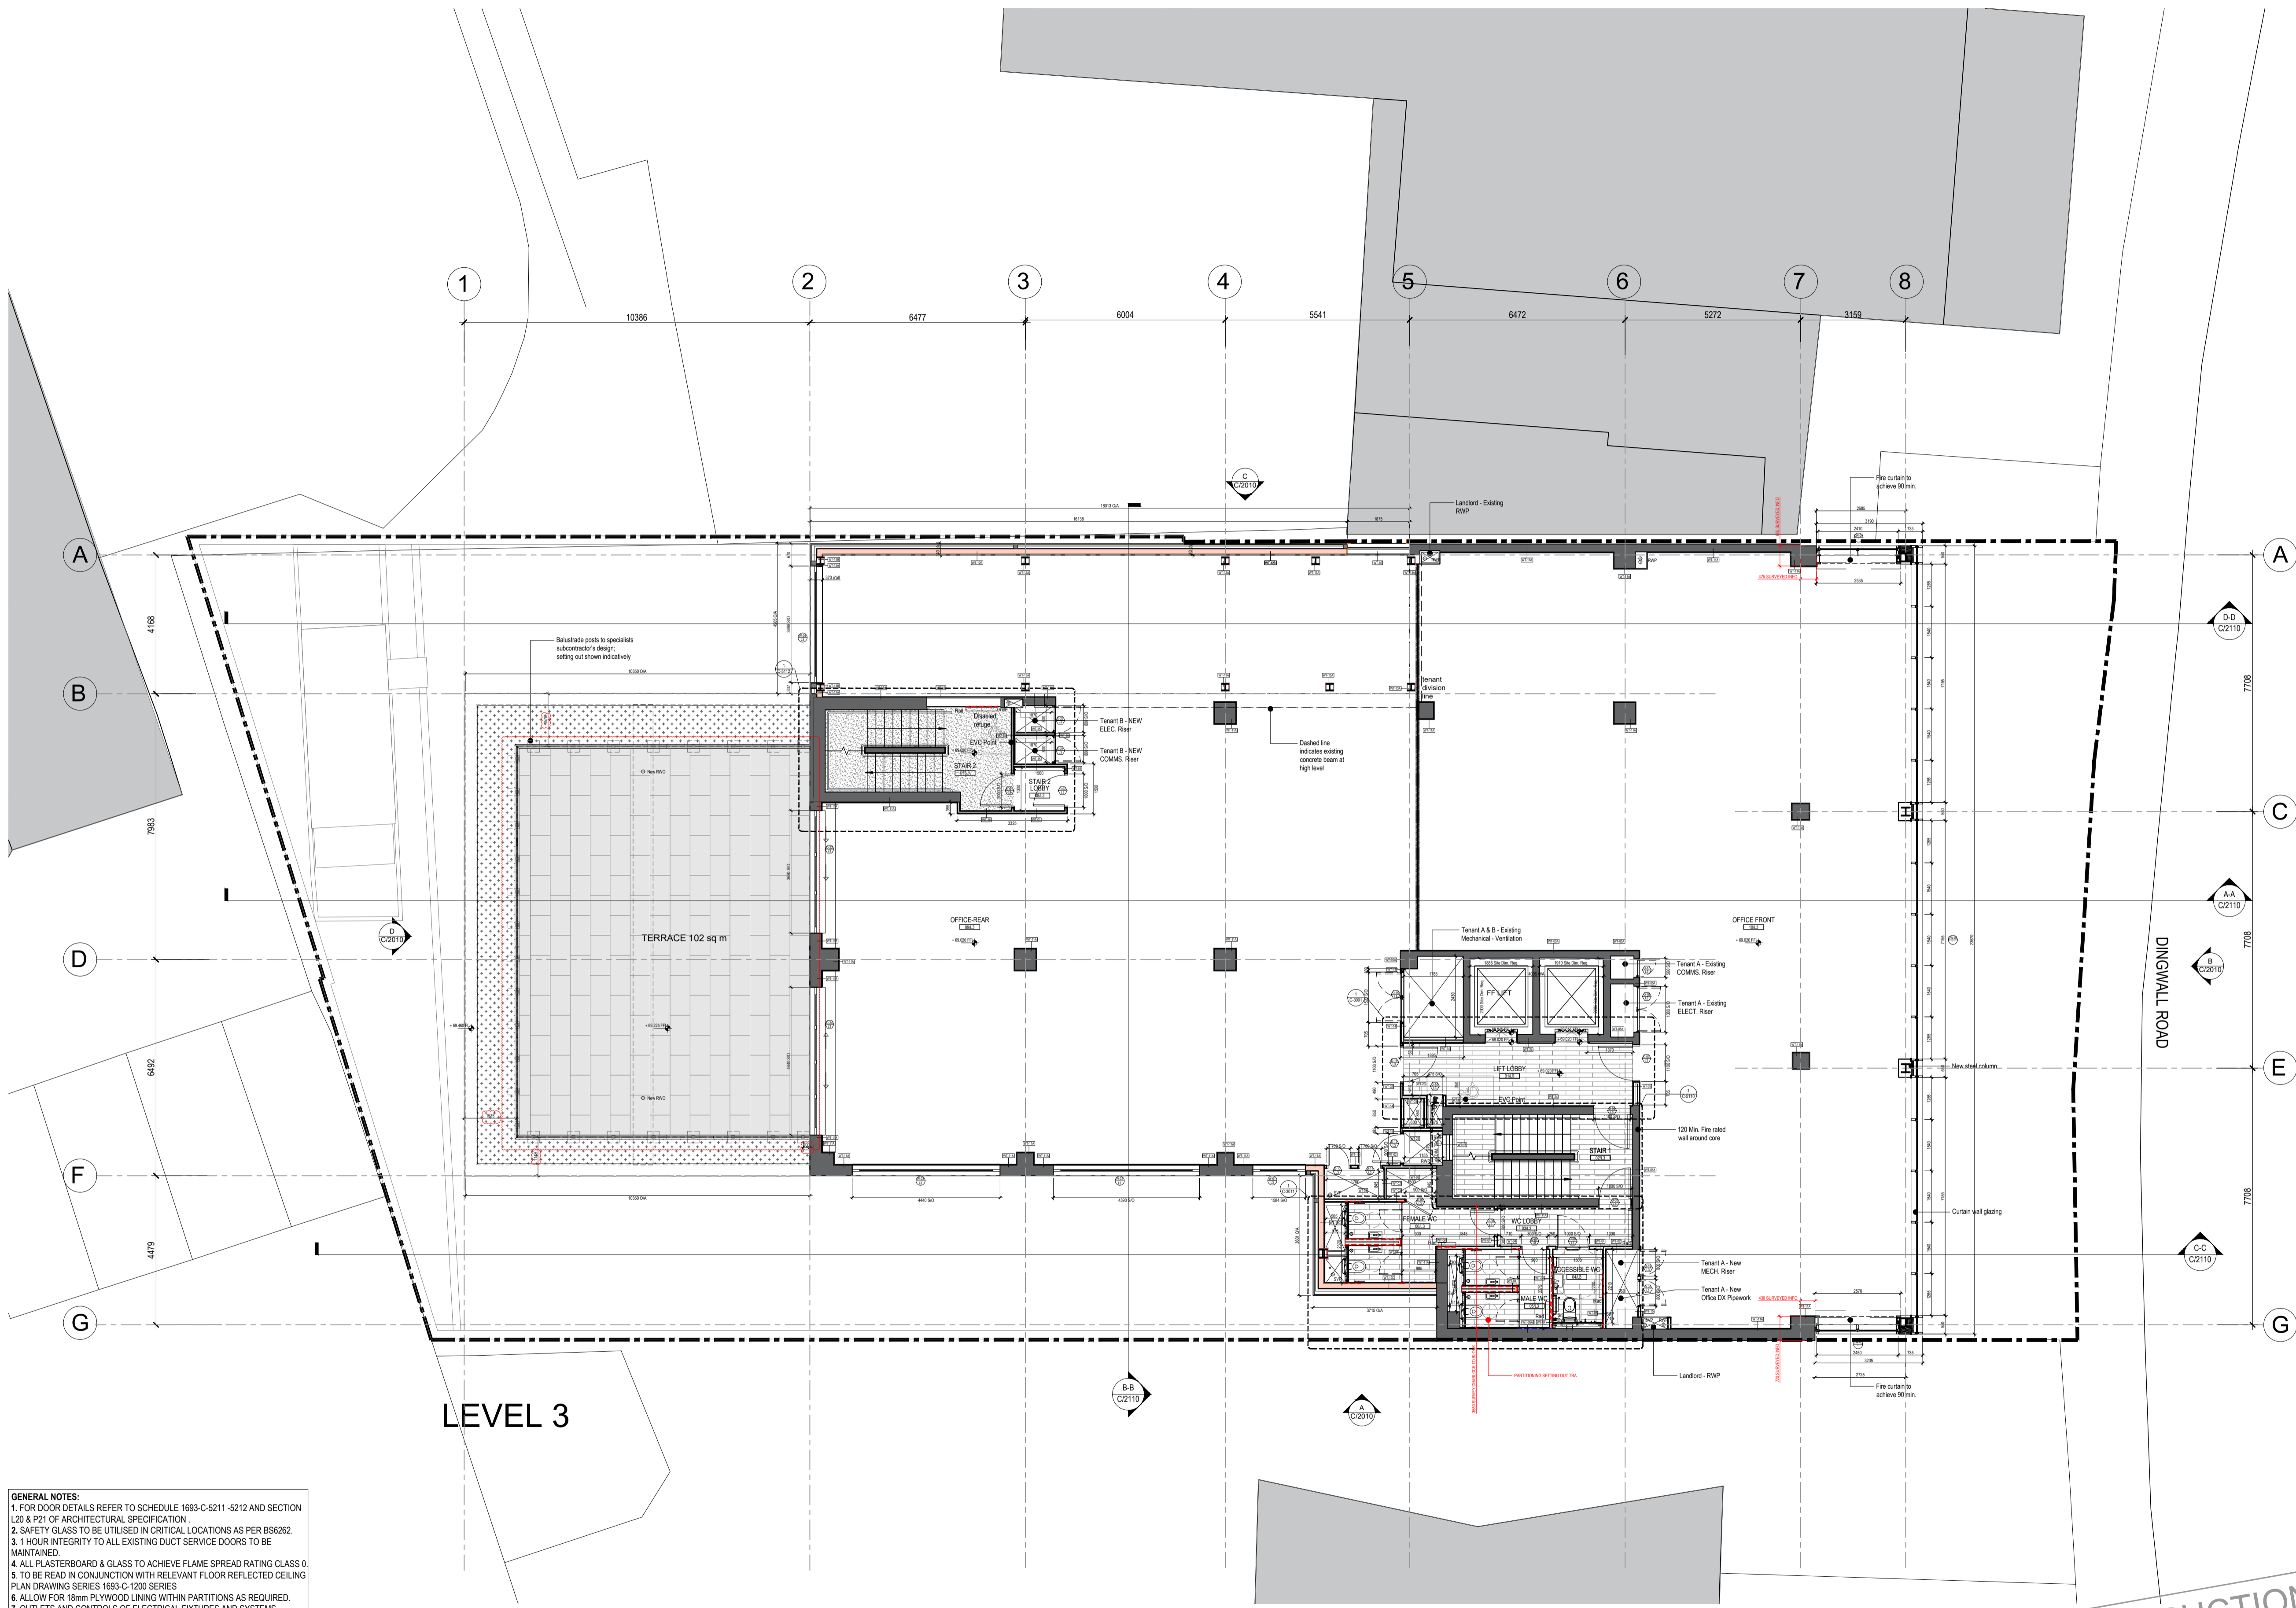

GENERAL NOTES:

- FOR DOOR DETAILS REFER TO SCHEDULE 1693-C-5211-5212 AND SECTION L20 & P21 OF ARCHITECTURAL SPECIFICATION.
- SAFETY GLASS TO BE UTILISED IN CRITICAL LOCATIONS AS PER BS6262.
- 1 HOUR INTEGRITY TO ALL EXISTING DUCT SERVICE DOORS TO BE MAINTAINED.
- ALL PLASTERBOARD & GLASS TO ACHIEVE FLAME SPREAD RATING CLASS 0.
- TO BE READ IN CONJUNCTION WITH RELEVANT FLOOR REFLECTED CEILING PLAN DRAWING SERIES 1693-C-1200 SERIES.
- ALLOW FOR 18mm PLYWOOD LINING WITH PARTITIONS AS REQUIRED.
- OUTLETS AND CONTROLS OF ELECTRICAL FIXTURES AND SYSTEMS SHOULD BE POSITIONED AT LEAST 350 MM FROM ANY INTERNAL CORNER PROJECTING WALL OR SIMILAR OBSTRUCTION AND, UNLESS THE NEED FOR A HIGHER LOCATION CAN BE DEMONSTRATED, NOT MORE THAN 1.2m ABOVE FLOOR LEVEL. THIS WOULD INCLUDE FIXTURES SUCH AS SOCKETS, SWITCHES, FIRE ALARM CALL POINTS AND TIMER CONTROLS OR PROGRAMMERS, WITHIN THIS HEIGHT RANGE.
 - LIGHT SWITCHES SHOULD BE POSITIONED AT A HEIGHT OF BETWEEN 900mm AND 1100mm ABOVE FLOOR LEVEL.
 - STANDARD SWITCHED OR UNSWITCHED SOCKET OUTLETS AND OUTLETS FOR OTHER SERVICES SUCH AS TELEPHONE OR TELEVISION SHOULD BE POSITIONED AT LEAST 400mm ABOVE FLOOR LEVEL, ABOVE AN OBSTRUCTION, SUCH AS A WORKTOP. FIXTURES SHOULD BE AT LEAST 150mm ABOVE THE PROJECTING SURFACE.
 - WHERE SOCKET OUTLETS ARE CONCEALED, SUCH AS TO THE REAR OF WHITE GOODS IN A KITCHEN, SEPARATE SWITCHING SHOULD BE PROVIDED IN AN ACCESSIBLE POSITION, TO ALLOW APPLIANCES TO BE ISOLATED.
- EXISTING EXTERNAL LEVELS PROVIDED IN BRACKETS ON LG DRAWING.

- ROOM REFERENCE NUMBER
- DOOR REFERENCE NUMBER
- WINDOW REFERENCE NUMBER
- PATTING



client
MAYFAIR CAPITAL

project
28 DINGWALL RD

drawing title
PROPOSED LEVEL 03 GA PLAN

sheet size scale
A1 1:100 @ A1

status
CONSTRUCTION

drawing no. revision
1693-C-1130 J

LOM architecture and design
The Glass House 5 Sclater Street London E1 6JY UK
Phone +44(0)20 8444 2999 Email mail@lom-fdp.com
Web www.lom-architecture.com