

[Back to main site](#)


ClubTurf

ClubTurf Cricket Limited

The prices below are for reference only and are subject to a site visit. They do not constitute an official quotation.

Please register or login to obtain your full design specifications.

[Start Again](#) | [Log In](#) | [Register](#)

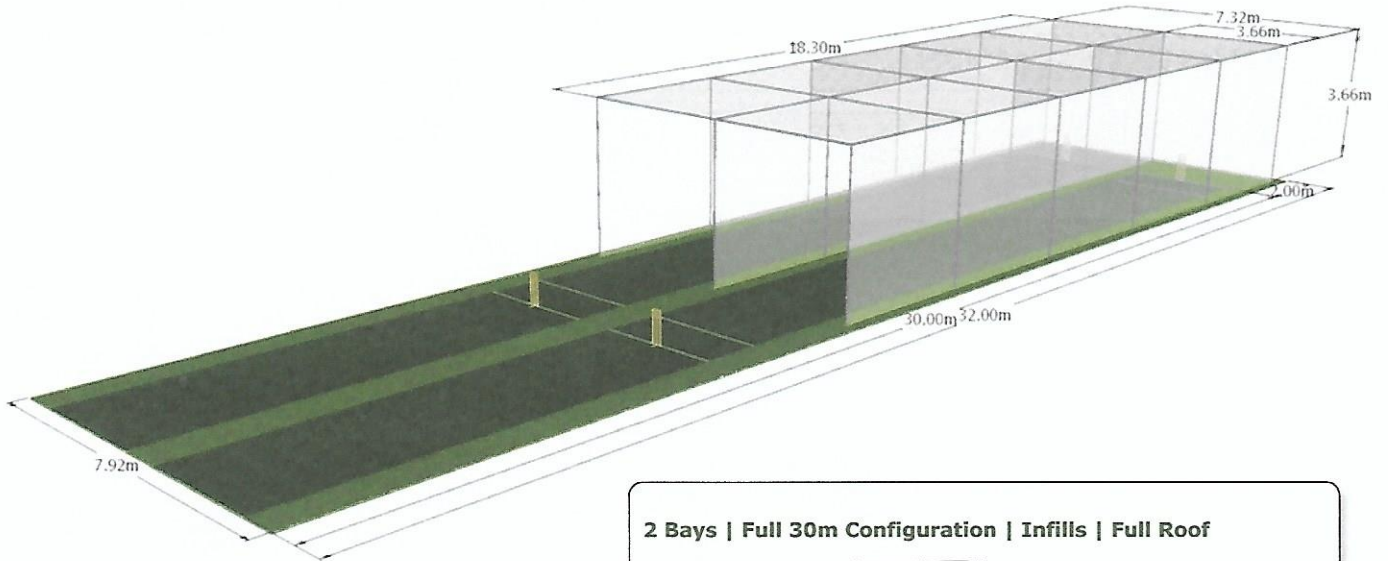

2 Bays | Full 30m Configuration | Infills | Full Roof

Pitches
Infills
Netcage
TOTAL

£48,000.00
£1,170.00
£7,160.00
£49,330.00

Club Turf: Design your Practise Area.

All text and images © copyright ClubTurf Cricket Limited. Reproduction strictly prohibited without prior written consent.

The ClubTurf 'International' Pitch

The **ClubTurf 'International' Pitch** is designed to meet situations where even minimal maintenance may be a problem, and is the pitch specified worldwide by the ICC.

It is constructed on the same principle as the ClubTurf 'Natural' Pitch with a consolidated stone base and hard-porous layer in order to give it a similar pace and bounce. However, the base construction is overlaid with **InterPad**. Whilst still providing a degree of changeability in its playing characteristics, the main attraction of this pitch is its reduction of routine maintenance by virtue of the InterPad protecting the hard-porous from disturbance. It is also a slightly more consistent pitch.

A non-turf pitch can not be used in all weather and is not maintenance free, however it scores over a natural turf pitch because it can be used continuously throughout the season without any loss of performance, provided routine maintenance is carried out.

In addition to periodic treatments for weeds, moss, algae and worms, a non-turf pitch needs to be regularly swept clear of debris and rolled with a light roller (250kg – 350kg) to keep the base flat. We recommend 30 minutes of sweeping and rolling for every 20 hours of use for a ClubTurf 'International' Pitch.

Over time the base may start to show signs of wear, particularly in the bowler's footmarks and the block holes. We recommend that we carry out a **Periodic Maintenance** every three years to service the base and re-fit the playing surface. For budgeting purposes you should allow between 1% and 2% of the total cost of the facility per year for Periodic Maintenances.

Detailed Specification:

Surface: 5mm. +/- 1mm.
Wilton woven ClubTurf

Pile: 700g/m² 100% UVS
Polypropylene

Backing: UVS Polypropylene
with vinyl ethylene resin (EVA)

Total Weight: 1540g/m²

Layer 1: Needle punch resin-bonded Polyester fibre InterPad

Thickness: 5-6mm
Total Weight: 1200-1225g/m²

Layer 2: 40-45mm depth
angular unbound mineral (hard-porous)
Particle size distribution from
0.075mm to 5.000mm

Layer 3: 80-90mm depth
angular stone
Particle size distribution from
0.075mm to 14.000mm

Construction Characteristics:

Woven synthetic turf surface laid on unbound mineral material (hard-porous) and a stone base. A stiff, porous resin-bonded pad (InterPad) is laid between the ClubTurf surface and the hard-porous top course throughout the pitch.

