

# External



IP66 Ingress Protection



Aluminium Housing




High LED Efficacy




Asymmetric Beam

## Dimensions

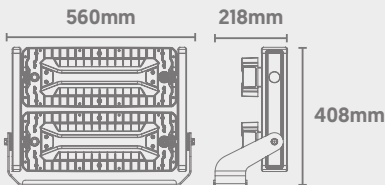

Light Source Energy Rating

## Photometric Data

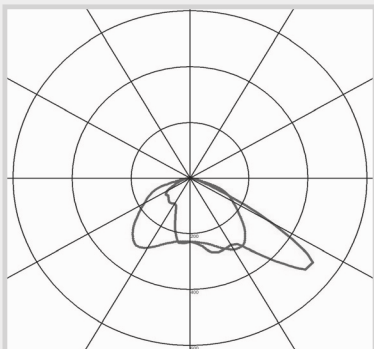

# QSport Gen 2 High-Power Flood Light

**QVIS**<sup>®</sup>  
LED LIGHTING

CODE: QSPORT2-630CW/AS



Power	Efficacy	Output	Kelvin
630W	135lm/cW	85050Lm	5700K

## Technical

Input Voltage	AC 100-277V
Colour Rendering Index	>70
Beam Spread	140*50°
Power Factor	0.95
Operating Temp.	-20 to +40°C
Materials	Die-Cast & Polycarbonate
IP Rating	IP66
Dimensions	560mm x 408mm x 218mm
Weight	14kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS