


OD2

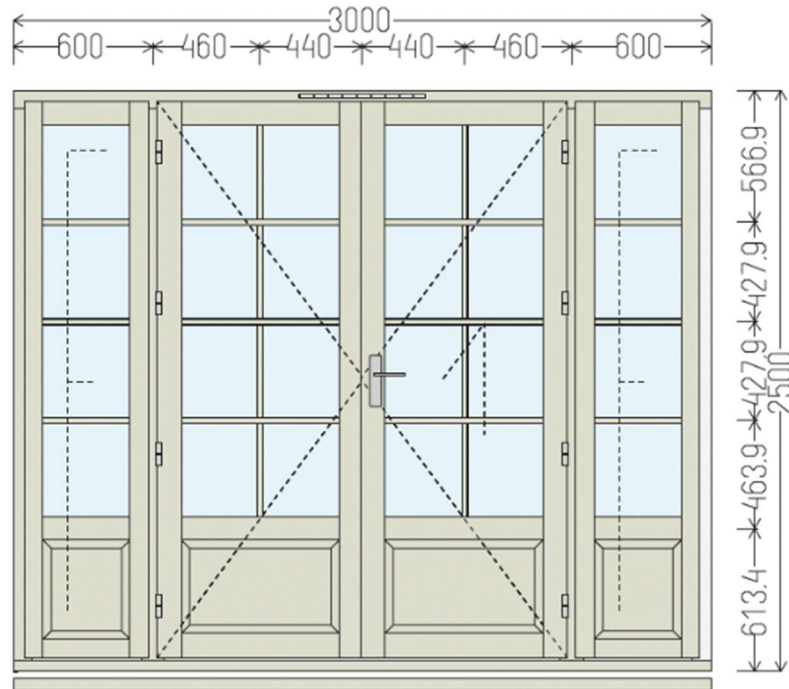

View from the outside

OD2 (1pcs)

1. Type: IV69 outward door, Ovolo
2. Wood: Sapele
3. Finish: White paint "Teknos" RAL9016
4. Glass: 4 gr -16- 4 GNP gr (Low-E double glazing with both toughened panes, $U_g=1.1$) (warm edge TGI white RAL 9016)
Insulated sandwich 34mm, $U_g=0.9$
5. Glass sealing: Transparent silicone
6. Fittings: multipoint lock, satin silver door lever, NICO 3D door hinges silver
7. Decorative transoms: 25mm Ovolo wooden bars glued on glass with duplex
8. External cill 50x27, 3000mm x 1pcs
9. Weight 542 kg.
10. $U_w \leq 1.25$.