


Regent

Unique to BMI Redland and characterised by its high, bold roll profile, the Regent tile is manufactured with a choice of colours, offering flexibility and compatibility to suit all roof types.

KEY ADVANTAGES


- Unique high, bold roll profile
- Our lowest pitch capability tile
- Ideal for extensions and lean-to roofing

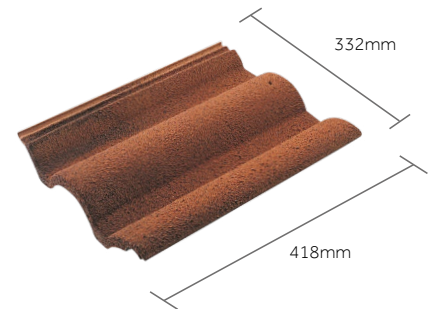


PRODUCT DATA

| | |
|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size (overall) | 418 x 332mm |
| Minimum Pitch and Headlap Through coloured | 12.5° at 100mm headlap / 17.5° at 75mm headlap (When roof slope includes inclined valleys, minimum pitch is 15°. If the roof slope includes roof windows check with the manufacturer what the minimum pitch specifications are for the roof windows) |
| Maximum Pitch (subject to fixing specification) | 90° |
| Maximum Headlap | 125mm |
| Minimum Gauge/Batten Spacing | 293mm |
| Maximum Gauge/Batten Spacing Through coloured | below 17.5° at 318mm / 17.5° and over 343mm |
| Hanging Length (approx) | 397mm |
| Cover (all figures are net & do not allow for wastage) Linear cover of 1 tile Covering capacity | 300mm 10.5 tiles/m ² at 318mm gauge / 9.7 tiles/m ² at 343mm gauge |
| Weight (at max. gauge approx)* per pallet, including pallet (approx) per 1000 | 46kg/m ² at 318mm gauge 43kg/m ² at 343mm gauge 1.18 tonnes 4.43 tonnes |
| Battens Required (at max. gauge) | 2.92m/m ² |
| Batten Size Rafter centres up to 450mm Rafter centres up to 600mm | 38 x 25mm 50 x 25mm |
| Fixing Clips | Eaves, Verge & Tile Clips |
| Nail Size for Slates** | 75 x 3.35mm (A/A) |
| Pallet Quantities | Tiles per pallet 252 Tiles per pack 42 Packs per pallet 6 |


*All weights nominal ** (A/A) Aluminium Alloy




Slate Grey
Code: 10001723




Terracotta
Code: 10001724




Tudor Brown
Code: 10001725



Farmhouse Red
Code: 10001726



Breckland Brown
Code: 10001727



Rustic Red
Code: 10001728



SCAN THE QR CODE
for more information or
to order a tile sample

INSTALLATION GUIDELINES:

- Tiles must be laid in a straight bond pattern
- Tiles must be hung on their nibs
- It is always advised that tiles are laid at mid shunt, although the precise roof details may require tiles to be laid more open or closed
- Eaves Comb must be used at all eaves situations
- Dentil slips must be used for mortar bedded ridges and hips
- Always refer to FixMaster for a BS 5534-compliant fixing specification
- When clipping verges, both left-hand and right-hand perimeter tiles must be clipped



44 100 21410102



44 104 21410102

PRODUCT STANDARDS

Regent tiles conform to BS EN 490:2011+A1:2017 Concrete roofing tiles and fittings for roof covering and wall cladding. Tiles will meet all the requirements of BS 5534:2014+A2:2018 Code of practice for slating and tiling (including shingles), providing BMI Redland's fixing recommendations are complied with.

FURTHER INFORMATION & TOOLS

For access to BIM objects or NBS-based clauses, Declarations of Performance, Material Safety Data Sheets, product codes or for expert help and advice, please visit our website.

SAFETY, QUALITY & ENVIRONMENT

BMI Redland tiles are manufactured under a Quality Management System approved to ISO 9001: 2015 and an Environmental Management System approved to ISO 14001: 2015, by TÜV NORD CERT GmbH. Information regarding transportation, handling, storage and disposal can be found on the Safety Data Sheets.

TECHNICAL SUPPORT

Whether you require telephone advice for your project, an online fixing specification or want to benefit from our complete guaranteed specification service, our expert team are on hand to help ensure success for your roof.

Regent SYSTEM ACCESSORIES

TILES

Standard Tile
Half Tile

UNDERLAYS

Spirtech 400 2S
Divoroll Elite 200 2S
Divoroll Universal 2S

EAVES PRODUCTS

RedVent EavesVent 350-450mm (6m)
RedVent EavesVent 450-600mm (6m)
Extension Trays 350-450mm (6m)
Extension Trays 450-600mm (6m)
Rapid EavesVent 2-in-1 Tray
Rapid EavesVent Rafter Roll (6m)
RedVent 25 Over-Fascia Vent (6m)
Underlay Support Tray (1.5m)
Eaves Comb Filler (1m)

VERGE PRODUCTS

Cloaked Verge LH
Cloaked Verge RH
DryVerge (Pack of 18 LH & 18 RH)
DryVerge Gable End Pack
Rapid DryVerge (Pack of 18 LH & 18 RH)
Rapid DryVerge Gable End Pack

HIP PRODUCTS

Dry Hip (2.7m)
Continuous Hip (5m)
Third Round Hip/Ridge Junction
Uni-Vent Rapid Ridge/Hip (10m)
Uni-Vent Rapid Hip Support Tray (1.2m)
Third Round Hip (without nail holes)
Third Round Hip (with nail holes)
Third Round Block-End Hip
Mortar Bedded Fixing Kit

VALLEY PRODUCTS

GRP 125 Valley (3m)
Dry Valley (High Profile) (3m)
Universal Valley Trough Tile

ABUTMENT PRODUCTS

Wakaflex Rapid Flashing
Top Edge Abutment Ventilation Pack (3m)
Bonding Strip (High Profile) (3m)

RIDGE PRODUCTS

DryVent Ridge (2.7m)
Uni-Vent Rapid Ridge/Hip (10m)
Continuous Ridge (5m)
Half Round Ridge Vent Terminal
Ridge Vent Terminal Adaptor
Flexible Pipe (100 to 100mm)
Half Round Gas Flue Ridge
Gas Flue Extension Adaptor
Half Round Ridge
DryVent Monoridge (2.7m)
Half Round Block-End Ridge
Half Round Monoridge
Half Round Block-End Monoridge LH
Half Round Block-End Monoridge RH
Mortar Bedded Fixing Kit
Ridge End Cap Half Round

VENTILATION TILES

Regent RedLine Vent Tile
Regent 8.8k ThruVent Tile
Flexible Pipe (100 to 100mm)

FIXING PRODUCTS

Tile Clip (100)
Verge Clip LH (100)
Verge Clip RH (100)
Eaves Clip inc Nail (100)
Tile Clip Nail (680)
Tile Nail (420)
Kro-Clip (50)
Innofix Clip Red (500)