

COURT SPECIFICATION


Excavate footprint of 35 x 17m wide.
Provide weedkiller and 1000g Geotextile membrane, to lay 150mm thick, base stone foundation, in two layers of free draining stone. Each layer to be consolidated by power roller. The base layer to be 10mm stone open textured Macadam to a depth of 32mm. The Macadam under surface to be 6mm pervious MUGA Macadam to a depth of 40mm laid between screed bars and rolled white hot.
Supply and instal the 8mm thick shockpad for softer surface
Provide Evo Pro - or similar approved - synthetic sand dressed carpet. Two different coloured lines to be drawn to indicate basketball court with dimensions of 30 x 14m.
The five-a-side football to have halfway line, center circle and semicicular goalie's area in different colour with the fenced area as playing area. Surrounding court perimeter will be 50 x 150 x 900mm long pc concrete edging

FENCING

3.03m high, polyester powder coated, galvanized steel mesh fence, in black colour. 50mm square mesh using 8/6/8mm steel bar. Supported by 50 x 50mm SHS posts at 2.5m c/c
There will be 5m wide recess goal areas and a 1.2m high rebound area to the perimeter. Two 1.2m wide gate posts to be sited at each end of the court
At each end will be basketball rings and backboard at the correct height.

FLOODLIGHTING

4no 6m high galvanized floodlight columns, sited one quarter length down each side of fence, to give even light distribution. Each floodlight column to have two LED800 Philips floodlights to be set in horizontal plane to direct light downwards and to avoid light spillage.
There will be timer set to limit the period of floodlighting.

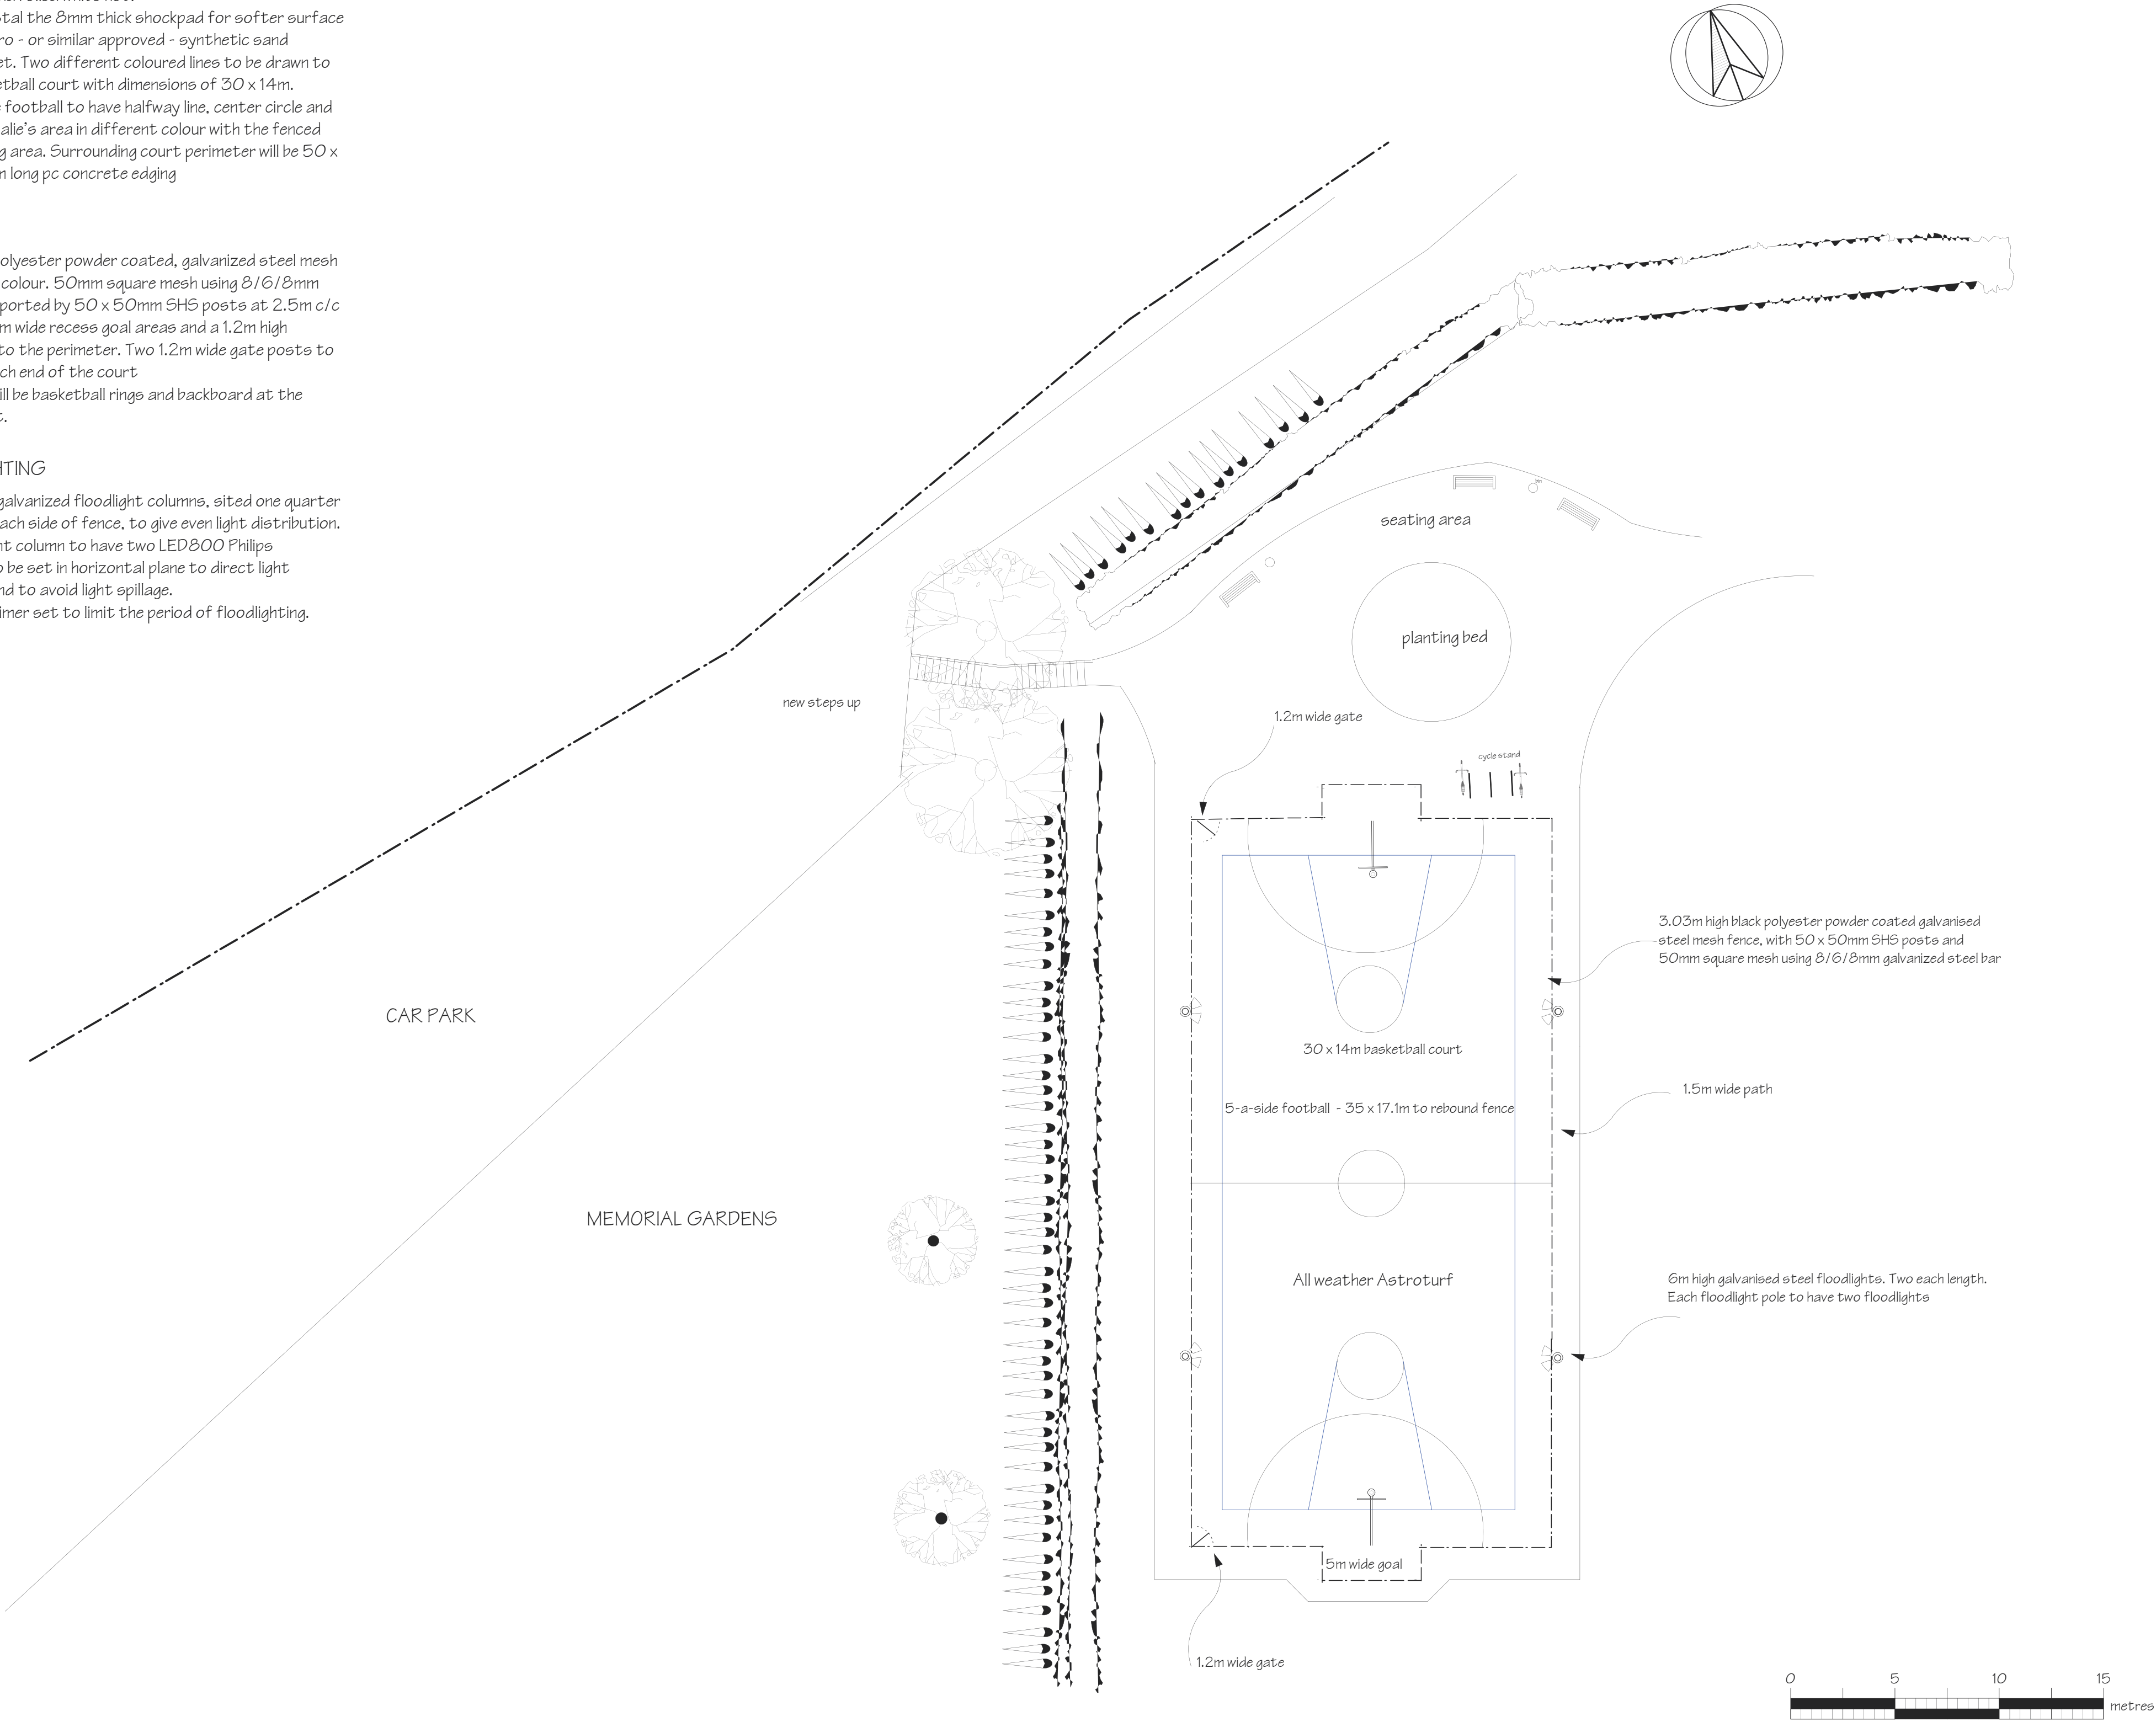

The Copyright of this drawing belongs to
Michael Weakley Associates.

**It should not be copied or reproduced without
express consent.**

Written dimensions to take precedent over scaling the
drawing. All dimensions to be checked on site.

The contractor shall take full responsibility for setting
out. Any discrepancies should be notified to the
architects.

Workmanship & materials shall comply with
B.S. 8000 Parts 1-15
dealing with : - 'Workmanship on Building Sites'.

If in doubt, please ask.

Revisions:

Job:
All-weather MUGA
Newman Collard Park.
Hill Brow Road, Liss,
Hampshire, GU33 7LE


Client:
Newman Collard Playing Fields Trust

Title:
Court Layout

Scale: 1:200 @ A1 **Date:** January 2024

Michael Weakley Associates
Chartered Architect

49 The Avenue
Southampton
SO17 1XQ



Telephone: 023 **8063 7287**
Facsimile: 023 **8023 3672**
michaelweakley @ btconnect.com

Drawing no. 1012 - 3 **Rev.**