



Sheffield Rack



Overview

The flat top Sheffield stand is a classic and timeless bike rack that can be used in any location. The optional horizontal bar provides extra locking points, enhanced security and additional advertising potential. The locking bar prevents the lock from being manipulated to the ground and attacked. Mountain bikes and smaller children's bikes particularly benefit from this lower horizontal bar as its also adds support. Other designs and logos can easily be incorporated into this style if required.

Mounting options

Embedding into the ground

Racks can be embedded into concrete to a depth of 300mm.

Surface mounting

Surface mounted racks are bolted to good quality concrete with 100mm x m10 or m12 bolts with 4 bolts to each leg.

Mounted onto metal rails (toast racks)

Toast racks are supplied welded to rails in 2 and 3 hoop units, which can be made into rows of any length. They are bolted to the ground through the rails with 110mm x m12 bolts and can be moved easily at a later date if required.

Features & Benefits

- Strong mild steel construction.
- Can be finished in Stainless Steel.
- Can be powder coated in a range of RAL colours.
- English manufacture.
- Encourages a health lifestyle.
- Easily relocated.
- Keeps area neat and tidy.
- Can be supplied with a security bar.
- Advertising potential.
- Surface mounted, embedded or supplied on a toast rack.



cycle-works

The Cycle Storage Specialists

Sheffield Rack

Materials & finishes

All Cycle-Works racks are made of at least 48mm diameter mild steel tube to BS EN 10025 Grade S275 or stainless steel.

Mild steel racks are available in a number of finishes:

Galvanised & nylon-coated


An excellent long-lasting finish that is less damaging to the bike's paintwork. Available in most standard RAL colours.

Galvanised only

This gives an 'industrial' look, and effective rust protection for 10-15 years.

Stainless steel

A non-rusting material that suits modern surroundings. We recommend and usually use Marine grade 316 stainless steel, but other grades are also available

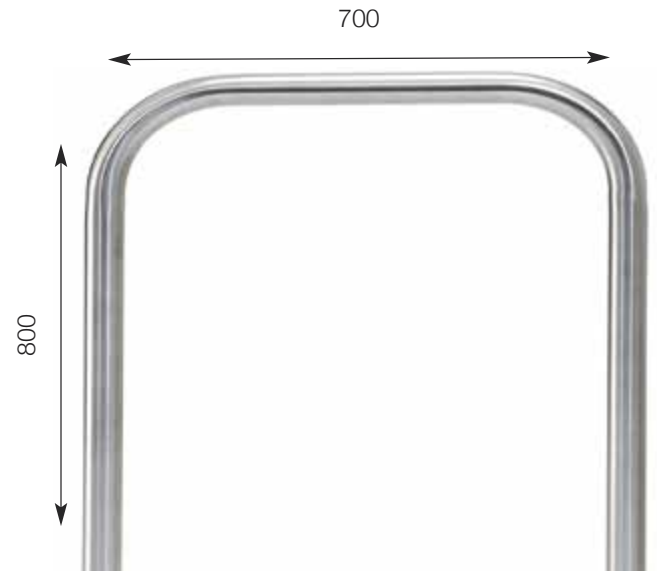

About Cycle-Works

Cycling is our passion. We believe that cycling is good for people, good for society and good for the environment. This belief underpins everything we do. We believe that the provision of quality facilities will increase the use and acceptance of the bicycle.

All our employees and associates cycle regularly in diverse disciplines such as commuting, touring and long distance audax rides. We are active in both local and national cycle campaigning.



Our Products

- Individual bicycle lockers
- High capacity 2-tier racks
- Open access and lockable shelters
- Wide range of individual racks
- Vertical and horizontal racks



Our Services

- Initial site visits
- Advice on product selection
- Consultation on your plans
- Full delivery and installation
- Aftercare and maintenance



ESI.info



cycle-works

The Cycle Storage Specialists
cycle-works.com • 02392 815 555