



CELLCOM PRIME7

7th GENERATION

Advanced GSM Intercom

- Calls your home phone and mobiles on roll-over when visitor presses call button.
- Never miss a visitor with mobile calling.
- Works with any standard contract or Pre-Pay GSM Nano SIM card.
- Comes with optional 12 month contract SIM, unlimited calls and texts. (UK/IRE only)
(Please check out www.aesglobaltelecom.com for sim information)
- Free home owner app to trigger gates, set up auto opening and closing times, create new access codes, receive notifications on entry, etc.
- Free installer app (AES PRO) for remote programming and diagnostics.
- Optional panels with keypad, proximity reader or both.



FOTA – Upgrade firmware via SMS.



Auto clock sync.



Store up to 4 notification phone numbers to receive an SMS (customizable) when relay is triggered etc



Ability to check Do-not-disturb times.



Set automatic gate open & close times.



Trigger, latch and unlatch SMS replies added. Ability to disable.



Issue time restricted codes.



Bigger 2 amp power supply.



High gain antenna as standard! Ability to view APN on signal level reply.



2x Relays. Ability to check Automatic Relay Times.

All new **improved** hardware.



Technical Details			
Dial Out Numbers	4	Relays	2
Permanent Codes/cards	250	Relay Type	N/C and N/O
Time Restricted Codes/cards	250	Relay Load	2 amps, 24v ac max
Temporary Codes/cards	50	Power Consumption	300mA on dial out, 2amp peak demand
Automatic Trigger Events per Week	50	Modem Models	4G Europe, 4G USA, 4G AUS/NZ
Caller ID Numbers	250	Power Supply	24v dc (24v dc 2A adaptor included)
Time Restricted Caller ID Numbers	250		



NEW AES PRO APP, user friendly. With Installer and homeowner capabilities.



PRIME7-IB-EU (Europe)

Ultra stylish all black panels with textured powder coated aluminium hood and gloss black acrylic facia trim over a tough metal back plate. Complete with white illuminated push button. (Keypad & non keypad panel options)



PRIME7-IBK-EU (Europe)

Area code:
EU (Europe)
US (USA)
AU (Australia & NZ)



PRIME7-AB-EU (Europe)

Stylish curved architectural model. Constructed from BS316 marine grade stainless steel and finished with gloss black acrylic trim. Blue backlighting.



PRIME7-ABK-EU (Europe)



PRIME7-AS-EU (Europe)

Curved architectural model in an attractive and rugged all brushed BS316 marine grade stainless steel with white back lighting illumination and integrated keypad. (Keypad & non keypad panel options)



PRIME7-ASK-EU (Europe)





PRIME7-ARC-RBK-EU
PRIME7-ARC-RB-EU (NON KP)




PRIME7-ARC-RSK-EU
PRIME7-ARC-RS-EU (NON KP)




Stylish modern panels. Available in all black with gloss acrylic faceplate OR stainless-steel faceplate. Complete with modern blue illuminated buttons and surrounded by our silicon neon blue lit Arc.

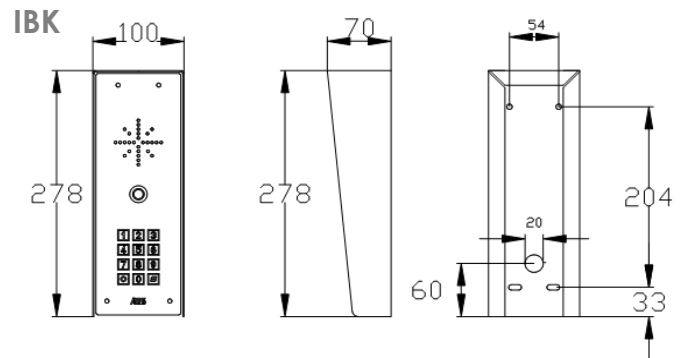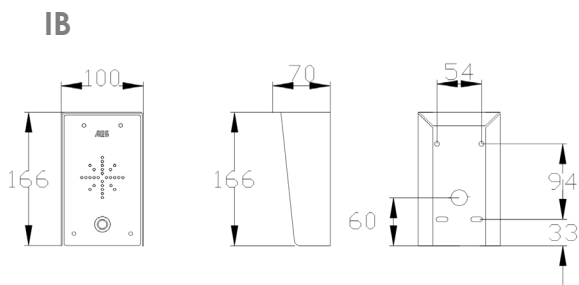

AB & AS

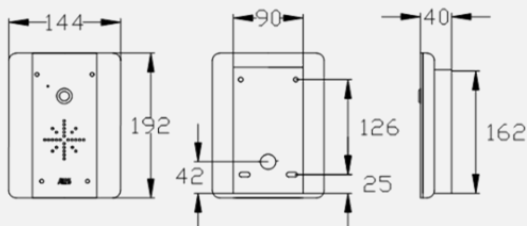

ABK & ASK

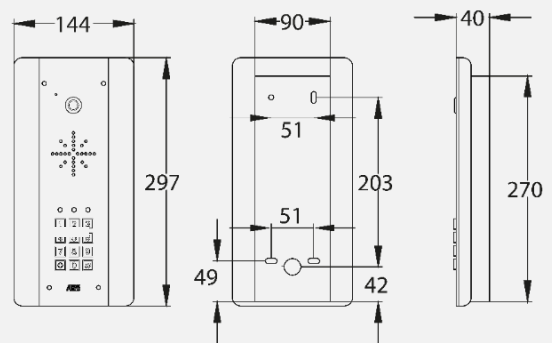

ARC

