

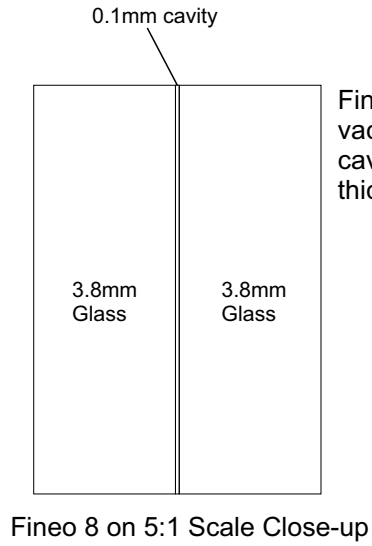


Proposed Window Sections

Installation of Fineo 8

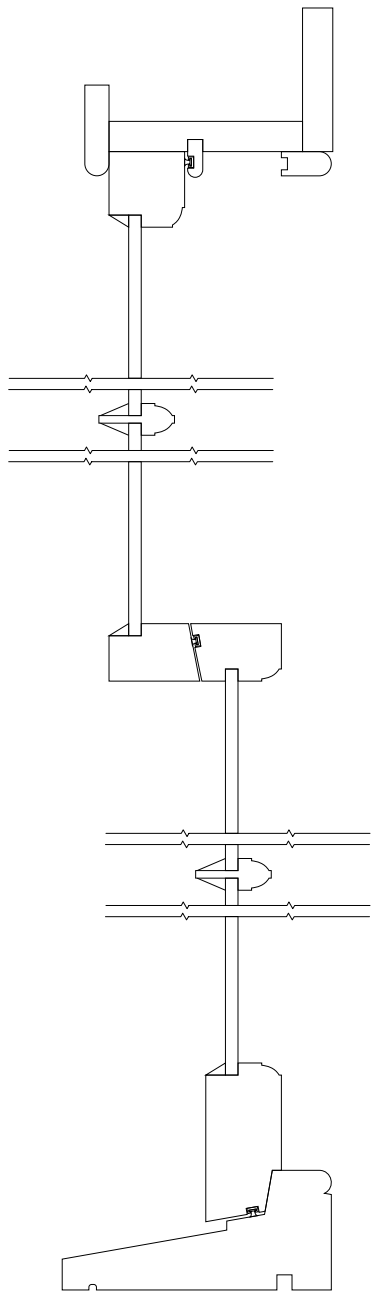

Fineo Glazing Systems are vacuum sealed units with a cavity of 0.1mm. The total unit thickness is 7.7mm.

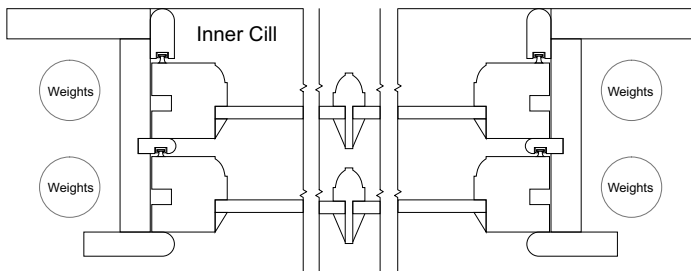

0 10 20 30 40 50 60 70 80 90 100

0 0.05 0.1 0.15 0.20 0.25 0.3 0.35 0.4 0.45 0.5

Section drawings are on a 1:5 Scale

1:5

Project Features:



accoya.com

Ultra-High performance sustainable wood. Guaranteed 50 years rot resistance.



by AGC
fineoglass.eu

Fineo is the new generation of insulated glass. This vacuum glazing, with its unrivalled thinness, provides optimal thermal and acoustic comfort.

Proposed Window Specification :

W1, W3, W4, W7, W8
Like-for-Like Replacement

Timber: Accoya
50x50mm timber sections, 12mm Parting beads and 33mm baton rods. 21mm Astragals

Draught Exclusion: Brush Pile and Carrier

Glazing:

Fineo 8 (7.7mm) Vacuum Sealed IGUs

Painting: Oil based - Sashes White gloss external / white eggshell internal

Replacement sashes to be made to historic standards with traditional wedged mortise and tenon joinery.

Proposed Window Specification :


W2, W5, W6
Refurbishment and Re-Glaze Only

Draught Exclusion: Brush Pile and Carrier

Glazing:

Fineo 8 (7.7mm) Vacuum Sealed IGUs

Painting: Oil based - Sashes White gloss external / white eggshell internal



**Sash Window Surveys
Edinburgh**

sashwindowsurveysedinburgh.co.uk

50 Whitelaw Drive, Bathgate, EH48 1RQ

Laura Bradley

22B Upper Gray Street
Edinburgh
EH9 1SW