


**Application for approval of details reserved by condition  
23/P/01355 - Date 01/03/2023**

**Condition no 3:  
Details and samples of the proposed external  
facing & roofing materials**

**Brick: Leicester Autumn Multi - Ibstock**

**Website link:** <https://www.ibstock.co.uk/product/bricks/A4937A?page=2&search=-multi&Colour=Red&Type=Stock>

**Mortar:** Dark Buff

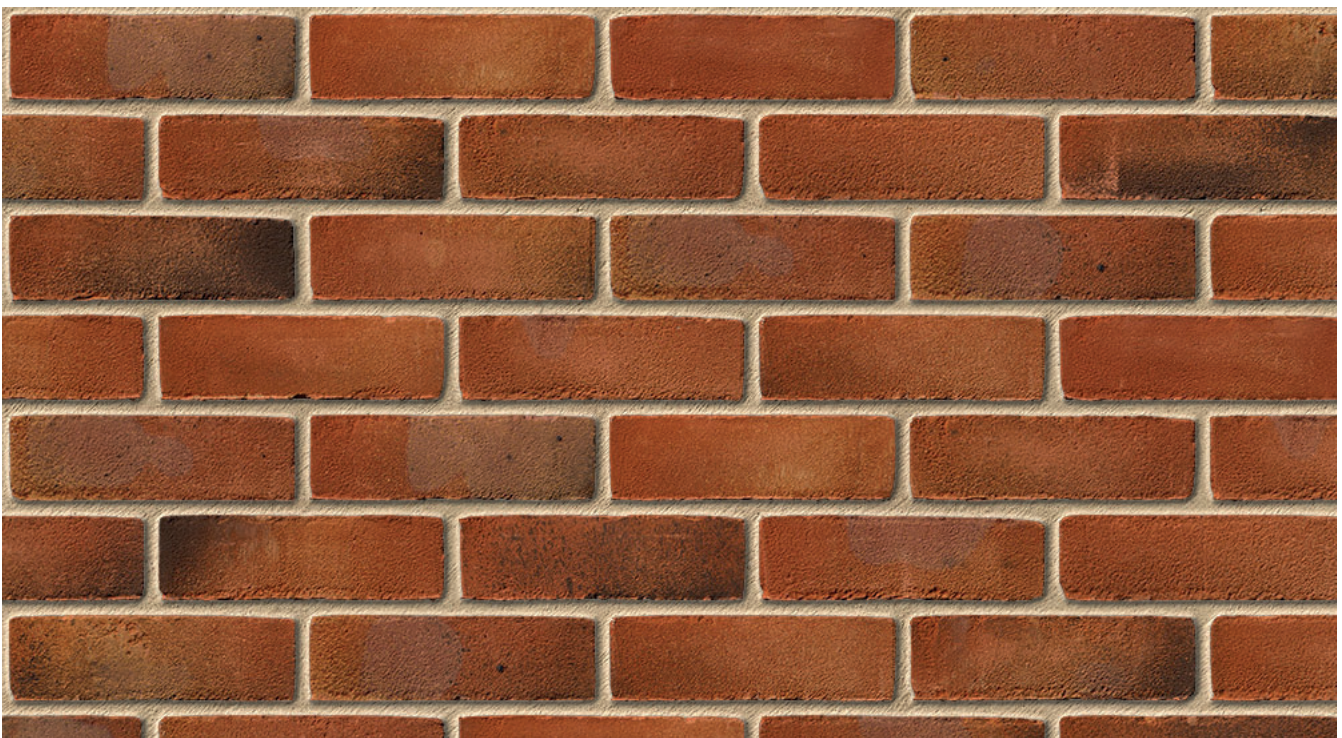

# Brick: Leicester Autumn Multi - Ibstock

## Product Information

Ibstock Code:	A4937A
Type:	Stock
Facing Description:	Sandfaced
Dry Brick Weight (kg):	2.2kg
Pack Quantity:	500
Packaging (standard):	Banded (Plastic) and Stretchwrap
Factory:	Ellistown

## Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Single Frog
Voids (%):	8-13
Compressive Strength (N/mm <sup>2</sup> ):	20
Active Soluble Salts:	S2
Water Absorption (% weight):	19
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m <sup>3</sup> ):	1530
Equivalent Thermal Conductivity "K" value 5% Exposed:	0.82
Initial Rate of Absorption (Suction Rate) (Kg/m <sup>2</sup> /min):	2.6
EAN:	5036335033258

---

1/3/2024

## Render: K-Rend Silicone FT - White

Website link: <https://www.k-rend.co.uk/products/renderers/silicone-ft>

Colour: White



**SILICONE FT**

Newport, Wales



**SILICONE FT**

White



## Render: K-Rend Silicone FT - White

Build examples:



## Roof Tiles: Slate

**Website link:** <https://www.theslatecompany.co.uk/shop/nsc-weathering-roofing-slate/>

**Type:** NSC Weathering Slate



## Hanging Clay Tiles

**Website link:** [https://www.aldershaw.co.uk/custom\\_handmade\\_roof\\_tiles](https://www.aldershaw.co.uk/custom_handmade_roof_tiles)

