



Standard Unit Dimensions:

Length: 4100mm
Width: 2140mm
Height: 2150mm

Length with Capacities:

3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

 Galvanised Only	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The New Sheffield Cycle Shelter uses the basis of the Wardale design whilst utilising curved front end frames without PET end panels, this offers a more cost effective design than the other Universal Shelters while maintaining the same classic design, with modular units the New Sheffield Cycle Shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles.

Features

- Robust modular construction featuring load bearing purlins
- Welded End Frames and Purlin Section made from Heavy-duty Box section assembled with Anti-Tamper High Strength Bolts
- Anti-Climb end frames
- Adjustable Baseplates
- Hot dipped galvanized to BS EN ISO 1461:2009
- 4mm ClearView PETg UV roof cladding (5mm also available)
- Bream Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management Systems
CERTIFIED

ISO 14001
Environmental Management
CERTIFIED

ISO 45001
Occupational Health and Safety Management
CERTIFIED



Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Steel Profile, Trapezoidal Roof Cladding
- Opal Roof Cladding
- Extended Adjustable Baseplates for Submerged Fixing
- Helmet Lockers
- Powder Coating to a wide range of colours
- LED or solar lighting
- Full Installation Service

Standard Unit Dimensions:

Length: 4100mm
Width: 2140mm
Height: 2150mm

Length with Capacities:


3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:


Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

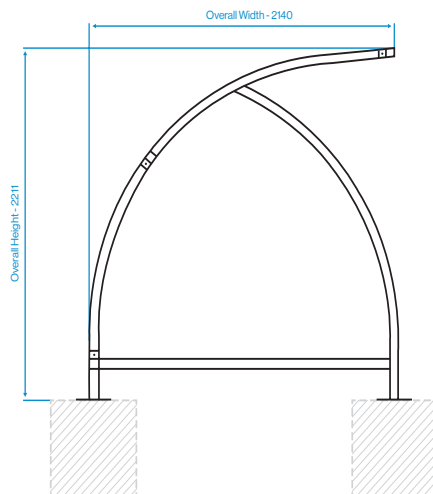

Installation

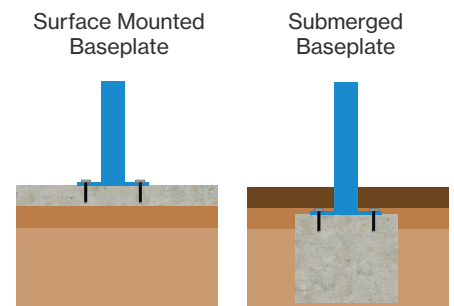

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management Systems
CERTIFIED

ISO 14001
Environmental Management
CERTIFIED

ISO 45001
Occupational Health and Safety Management
CERTIFIED

