

M70 | Residential and French Doors

Features

Maximum sash sizes

Residential: 1122mm (w) x 2122mm (h) French Door: 1122mm (w) x 2122mm (h)

Outer frames

55mm[^], 67mm and 80mm outer frames [^]as threshold only - Please note 80mm outer frames not available on Inifinity

Midrail

115mm midrail

Sash

115mm door sash

Finishes

Available in a large assortment of colours and woodgrain options from the Variations range and SPECTRAL*

Glazing beads

28mm bevelled 28mm sculptured 36mm bevelled 40mm bevelled 44mm bevelled

Ancillaries

Frame extensions, cills and weathering trims Range of coupling options Range of bay pole options

Thermal performance**


Achieves U-values as low as 1.3 W/m²K using double glazing Achieves U-values as low as 0.98 W/m²K using triple glazing


* SPECTRAL is only available on bevelled or flat surfaces.

** Figures can vary dependent on specification.


Note 1 Not available on French Doors

Technical Drawing

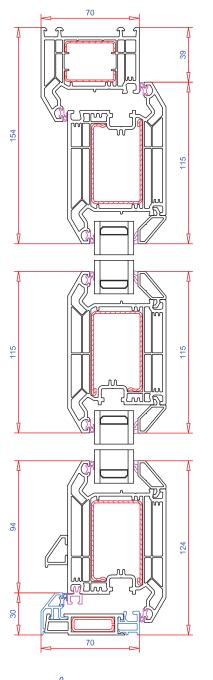



Standard Low Threshold See Note 1



Part M Low Threshold See Note 1