

Tree protection plan
Location of trees, categorisation & protection/management proposals













Land at Calmore Croft Farm, Salisbury Road
Calmore

Barrell Plan Ref: 17037-4



Permission is granted to scale from this drawing for Local Authority Planning Approval purposes relating to tree protection measures only. Where applicable this drawing is to be read in conjunction with the arboricultural report. This drawing is the copyright of Barrell Tree Consultancy 2024 ©

This drawing to be reproduced in colour only.
www.barrelltreecare.co.uk

-  BS category A Trees of high quality
-  BS category B Trees of moderate quality
-  BS category C Trees of low quality
-  BS category U Trees unsuitable for retention
-  Trees to be removed
-  Proposed layout
-  Estimated tree positions not included on original land survey and/or adjusted crown spreads
-  Protective barrier/fencing
-  Construction exclusion zone (CEZ)
-  Precautionary area where new surfacing to create parking bays and road and footpath access will be constructed within RPAs using a cellular confinement system in accordance with the guidance set out within SGN 9.
-  Root protection area (RPA) boundaries for category A and B trees
-  Root protection area (RPA) boundaries for category C trees



Tree No	Species	Category	RPA Radius	Tree Works
All retained trees & hedges				Carry out safety check and lift over site to 3-4 m as necessary.
T1	Oak	B	7.8	
T2	Oak	C	12	
V3	Oak	A	15	
T4	Oak	A	15	Fell for development
G5	Ash, Birch, Sycamore, Cypress	C	6	
T6	Poplar	C	6.6	
T7	Poplar	C	7.8	
G8	Willow	C	5.4	Fell for development
T9	Oak	A	14.4	
G10	Oak, Ash, Cypress	A	10.2	
G11	Willow, Sycamore, Oak	B	7.8	
T12	Oak	A	13.2	Fell for development
T13	Oak	A	9	Fell for development
T14	Oak	B	9	
T15	Oak	B	9	
T16	Blue Atlantic cedar	C	3	Fell for management
T17	Yew	C	5.4	Fell for development
T18	Birch	C	2.4	Fell for management
G19	Willow, Cypress	C	4.2	Fell for management
G20	Cypress	C	7.8	Fell for management
T21	Ash	C	4.2	Fell for management
T22	Leyland Cypress	C	2.4	
T23	Oak	B	7.8	
G24	Leyland Cypress	C	3.6	Fell for development
T25	Leyland Cypress	C	3.6	
T26	Oak	B	12	
T27	Oak	C	7.8	
T28	Oak	B	12	
T29	Cypress	C	2.4	Fell for management
T30	Ash	U	3	Fell for management
T31	Ash	C	4.2	Fell for management
T32	Hawthorn	C	3	
T33	Oak	B	6.6	
T34	Ash	B	7.8	
T35	Oak	B	10.2	
T36	Oak	C	7.8	Fell for development
T37	Cypress	C	5.4	Fell for management
T38	Norway spruce	C	5.4	Fell for development
G39	Cypress	C	3.6	Fell for development
T40	Oak	A	14.4	
T41	Oak	C	6	
V42	Oak	A	15	
V43	Oak	A	15	
T44	Oak	A	9	
T45	Oak	A	10.8	
T46	Oak	A	11.4	
T47	Oak	A	14.4	
T48	Oak	A	11.4	
T49	Oak	A	14.4	
T50	Oak	A	10.2	
G51	Oak, Ash, Hawthorn, Hazel	B	7.8	
T52	Oak	B	9	
T53	Oak	A	10.2	
T54	Oak	A	10.2	
V55	Oak	A	14.7	
T56	Ash	U	7.8	
T57	Oak	B	9	
G58	Ash, Hawthorn	C	5.4	
T59	Norway spruce	C	6.6	
T60	Oak	C	6.6	Fell for development
T61	Oak	A	11.4	
G62	Oak	A	10.8	
G63	Oak, Ash, Cherry, Hawthorn, Hazel	C	6	Fell for development
T64	Ash	C	6	
T65	Cypress	C	5.4	

SGN 1 Monitoring tree protection

Always:

- have a pre-commencement meeting with the tree consultant before development starts
- use the tree consultant to regularly check that protection remains fit for purpose
- use the tree consultant to supervise work in RPAs
- keep a written record of supervision



SGN 2 Fencing protected trees

Always:


- install protection before development starts
- make sure protection is fit for purpose, i.e. it prevents damage to trees and soil
- keep protection in place until there is no risk to trees
- get written permission to move or remove any protection



SGN 4 Pollution control

Always:


- keep toxic products away from RPAs

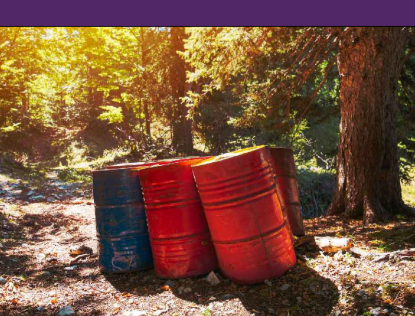

SGN 5 Site cranes & piling rigs

Always:

- use the tree consultant to supervise work with cranes and piling rigs in RPAs



SGN 9 Installing/upgrading surfacing in RPAs

Always:


- use the tree consultant to supervise work in RPAs
- minimise damage to roots and disturbance to soil in RPAs
- minimise excavation when installing or upgrading surfacing in RPAs



SGN 11 Installing services in RPAs

Always:


- use the tree consultant to supervise work in RPAs
- select the least damaging option when installing services, so prioritise trenchless, over broken trench over continuous trench
- hand-dig trenches if trenchless is not feasible

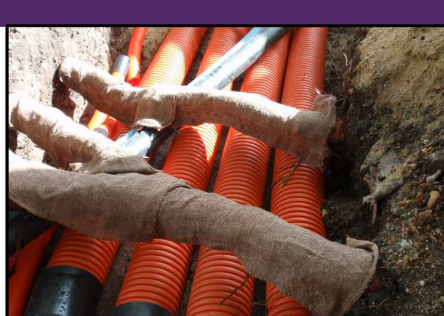

SGN 12 Landscaping in RPAs

Always:

- use the tree consultant to supervise work in RPAs
- avoid raising ground levels within 1m of the trunks of retained trees

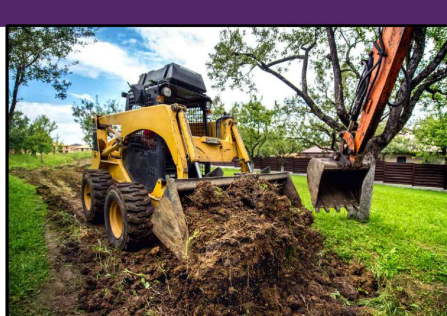

How to use plan

More detailed guidance on each Site Guidance Note (SGN) can be found in a printed hard copy compilation of all the SGNs, Manual for Managing Trees On Development Sites version 3.0, issued to the Site Manager at the pre-commencement site meeting (Note: This should be retained on site throughout the duration of works). Additionally, an electronic pdf compilation of all the SGNs, was submitted with this drawing to the local planning authority and the client. Alternatively, a pdf of each SGN can be downloaded by:

- clicking the image links in the electronic pdf version of this plan;
- holding a mobile phone QR (Quick Response) code reader over the QR code in the paper version of this plan; or,
- visiting our website at <https://www.barrelltreecare.co.uk/resources/technical-guidance>