

**KEY PLAN**  
Scale 1:500 @A1/ 1:1000 @ A3

Every other window to be openable and lockable - first floor windows to be on restrictors


New double glazed polyester powder coated aluminium windows & glazing.

High level windows to be openable and lockable.

New metal security gate and fence

New light gauge metal stud framing system for external walls - non-load bearing infill system with following wall build up (internal face to external face) - 2no. layers plasterboard, vapour control layer, light gauge metal studs with non-combustible insulation running between studs, sheathing board fixed to frame, brick slip finish mechanically fixed to frame through sheathing board. New external walls to achieve maximum U-Value of 0.26W/(m<sup>2</sup>K) and all construction joint details to address thermal bridging in line with Part L1(a) Building Regulations.  
**NB: Brick slips to match existing brick finish. Mortar joint to be applied to gaps between mechanically-fixed slips.**

**PROPOSED ELEVATION A**

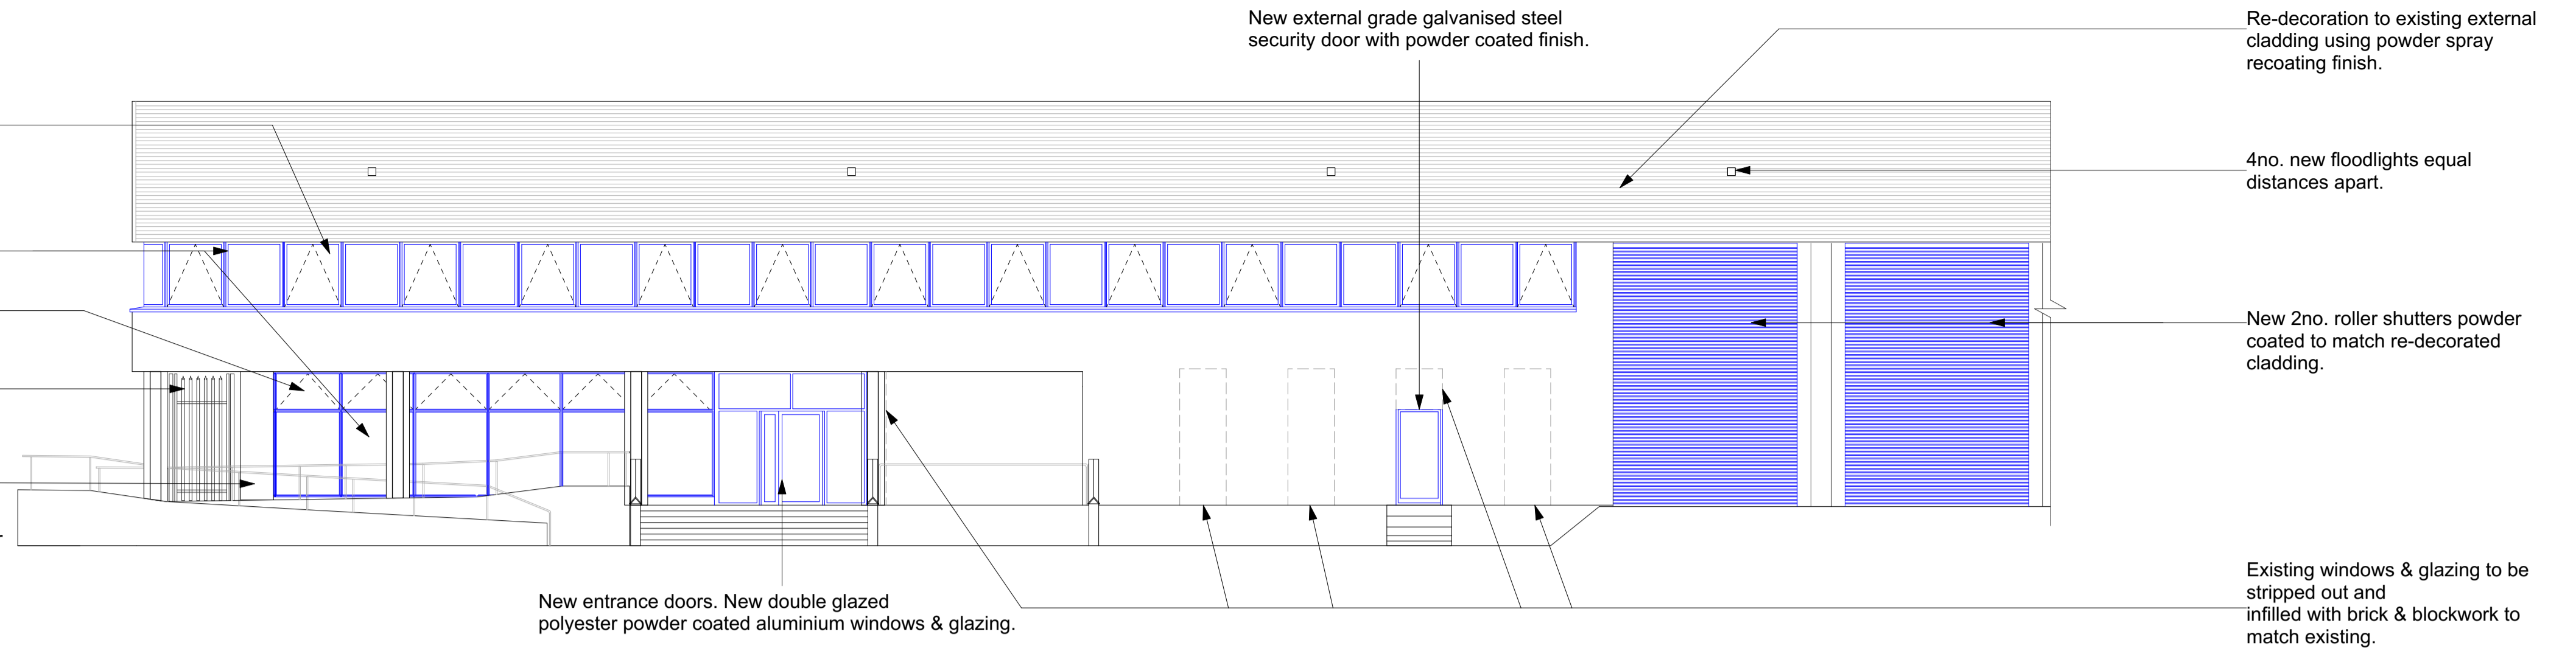


Dashed Line indicating the height of existing roof behind cladded wall

New double glazed polyester powder coated aluminium windows & glazing.

Existing windows & glazing to be stripped out and infilled with brick & blockwork to match existing.

New external grade galvanised steel security door with powder coated finish.

**PROPOSED ELEVATION B**


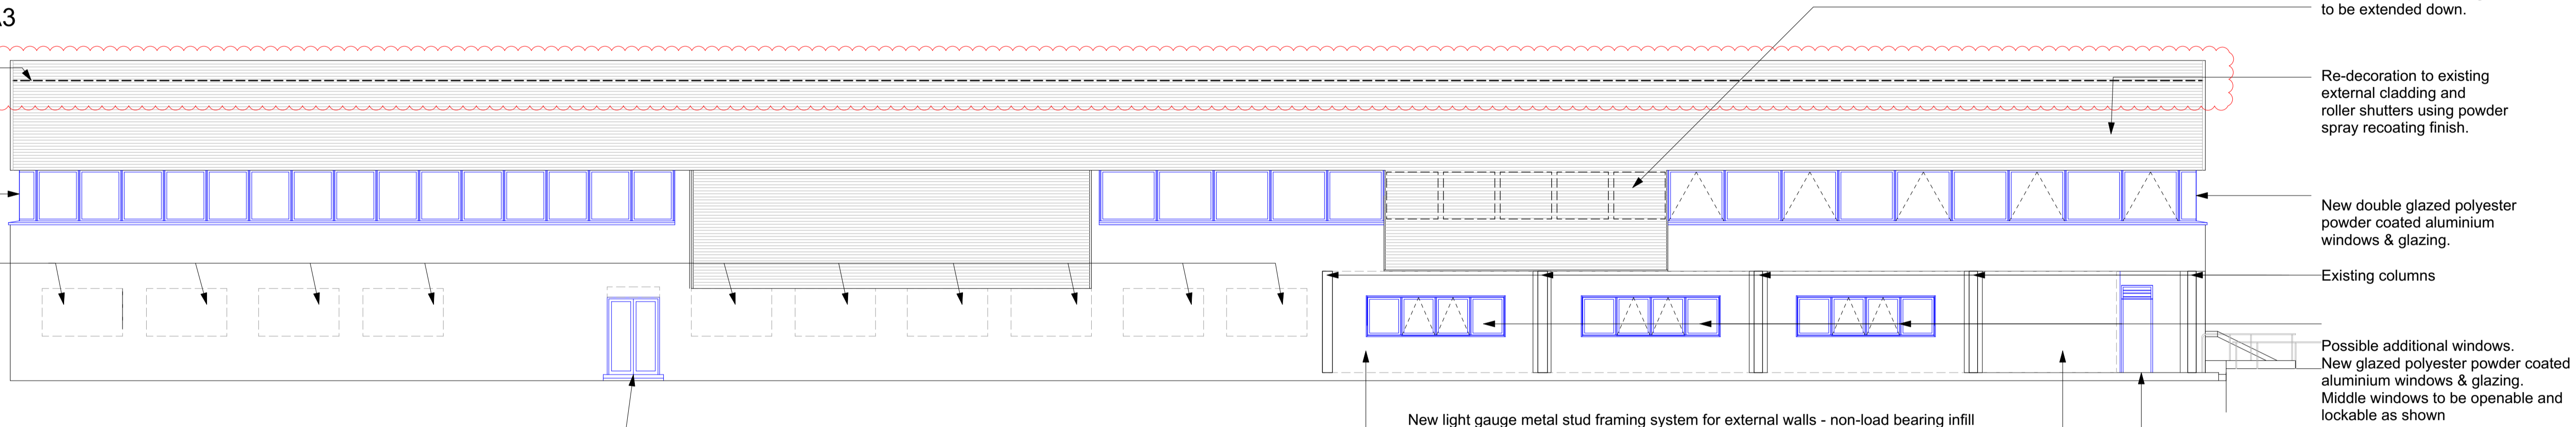


All high level windows to warehouse to be fixed, non-opening glazed panels

Existing windows & glazing to be stripped out and infilled with brick & blockwork to match existing.

New external grade galvanised steel security door with powder coated finish.

**PROPOSED ELEVATION C**

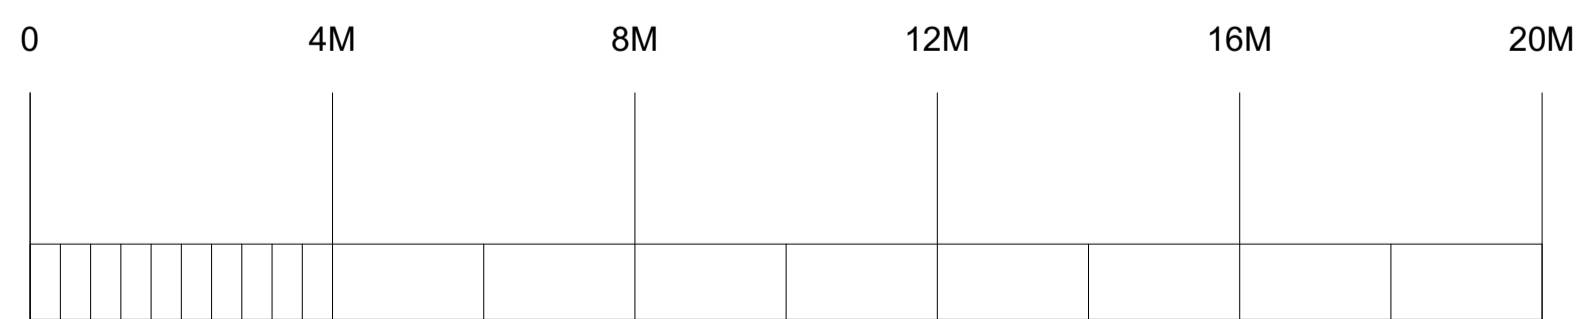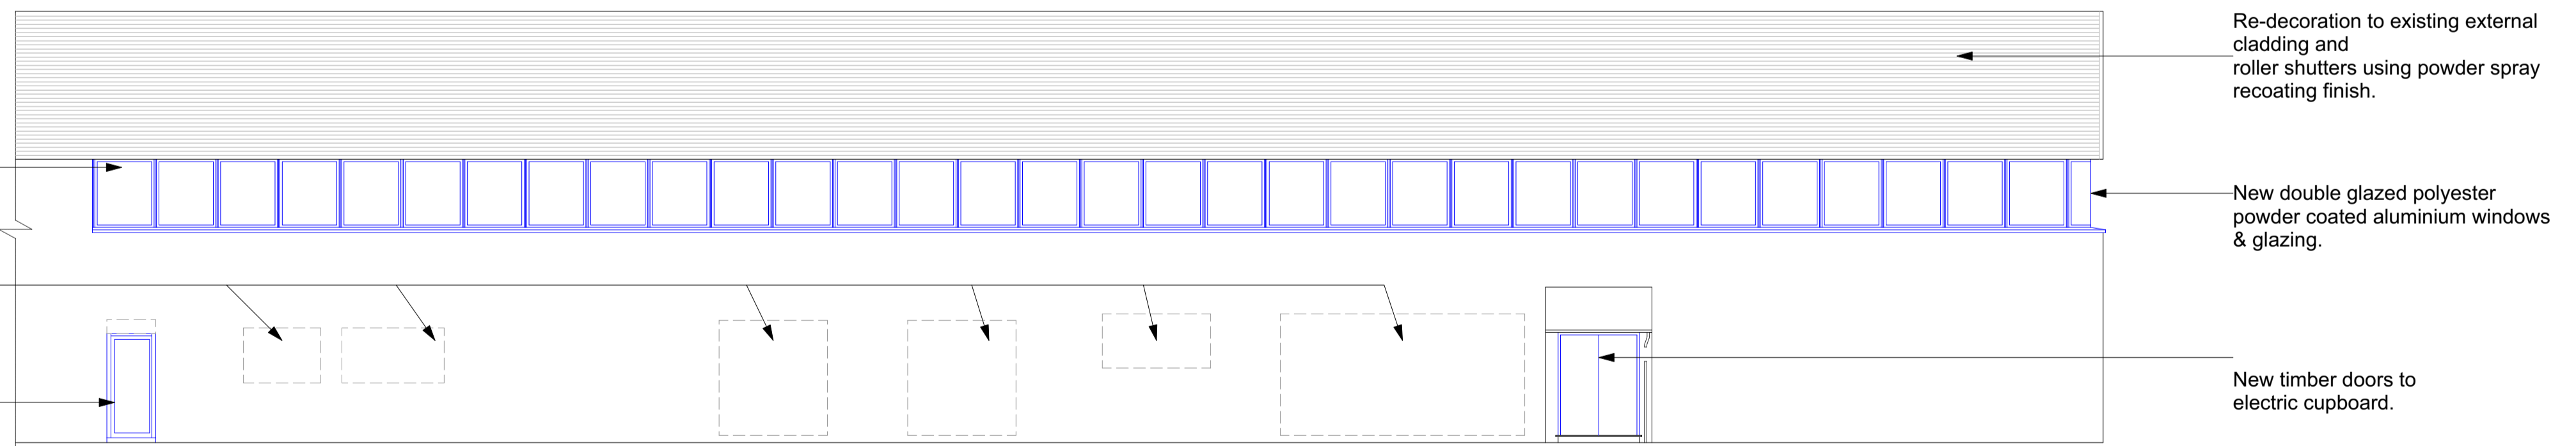

**SCALE BAR**

This drawing is Copyright © of Cogent Building Consultancy LLP.

Do not scale this drawing.  
All dimensions to be checked on site.  
Drawing to be read in conjunction with any specifications, schedules and Consultants drawings and details.

B	11.03.24	CHANGES TO DRAWING AS HIGHLIGHTED
A	15.02.24	PLANNING ISSUE
REV	DATE	COMMENTS



68 - 65 Tabernacle Street  
London EC2A 4BD  
+44 (0) 20 3890 2890  
www.cogentbc.co.uk

**PLANNING ISSUE**

Project Name	Unit 1-2, Willoughby Road, Bracknell, RG12 8FB	Scale	1:100 @A1 1:200 @ A3	Drawn	MS	Checked	LNB	Date	09.02.24
Client	Duff Investment Holdings Limited acting as a general partner of Argo DFI Logistics Partnership LP							Status	REV - B
Drawing Title	Proposed Elevations							Drawing No.	201