






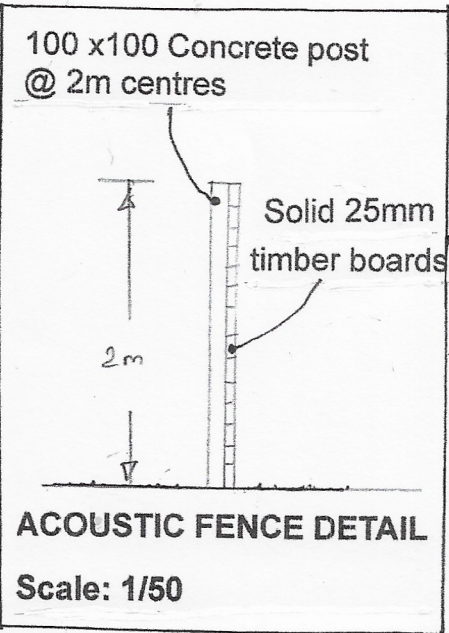


LAYOUT

Scale :1/500



KEY	
	Mobile Home
	Septic tank
	New tree planting
	Post and rail fencing with hedgerow
	Acoustic fence
	Hard-surface areas
	Existing grassed area undisturbed



LANDSCAPE SCHEDULE

Tree planting will take the form of an equal mix of Hawthorn, Rowan and Hazel to be planted at 3m centres as 1m high whips and provided with spiral protectors.

Hedgerow planting will be an equal mix of hawthorn, hazel, dog rose, and holly in a double row at 0.3m centres as 1m high whips

