


- Access and Security Legend**
- Pedestrian Access**
- Main Pupil pedestrian entrance/exit routes
  - Pupil pedestrian circulation
  - School Visitor pedestrian entrance/exit routes
  - Shared cycles/ pedestrian route
  - Community pedestrian entrance/exit routes
  - Refuse and Deliveries pedestrian access.
- Vehicular Access**
- School staff, pupil, visitor and community (out of hours) vehicle routes.
  - Emergency service vehicle access/ circulation
  - Service, Refuse and Deliveries vehicle access.
  - School grounds maintenance access
- Security and Access Control.**
- New Main Secure Line Fence-2.4m High Weldmesh. (with matching gates)
  - Proposed Gates 2.4m high Secure Gates manual control locking.
  - Proposed Gates 2.4m high Secure Gates automated access intercom control.
  - New Sports/ Ball Fencing- Weldmesh- 3.0m High. (Forming part of Secure Line)
  - Proposed Sports court entrance Gates 2.4m high (manual control)
  - Existing retained weldmesh fence (along carpark frontage)-1.8-2.0m High.
  - Timber Knee Rail, existing to be retained.
  - Existing Sliding gate to be retained with automated access control for exit
  - Existing Barrier - to be retained for management of vehicle access.
  - Existing Gate - to be retained for maintenance of vehicle access.
  - New automated vehicle gate to car park entrance, with access control intercom (managed open for school drop off) 1.8-2.0m High.
  - Secure Line Timber Screening Fencing-2.4m High.
  - Internal Fencing to ASD Garden Timber Screening-1.8m High.
  - New access gate to ASD Garden-1.8 timber-manual control.
  - Existing Retained Site Boundary Fences
  - Existing timber knee rail, to be retained
  - Existing Fencing outside extent of scope and to remain untouched.

This document is © Bond Bryan Architects Ltd. If in doubt ASK. Drawing measurements shall not be obtained by scaling. Verify all dimensions prior to construction. Immediately report any discrepancies on this document to the Originator. This document shall be read in conjunction with associated models, specifications and related consultants' documents.

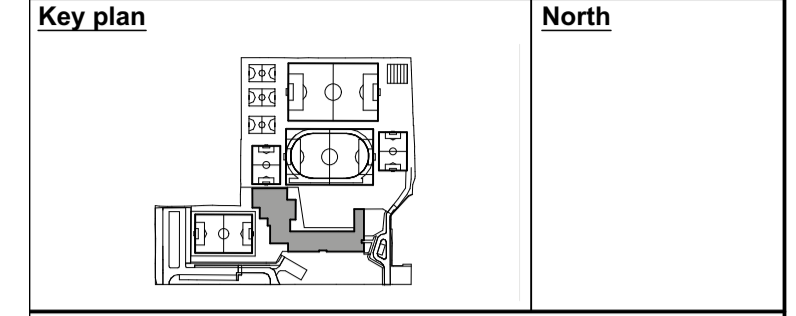

P12	Stage 4 comments	ZZ	SR	21/11/2023
P11	New substation and temp substation	ZZ	SR	20/11/2023
P10	Stage 4 comments	ZZ	SR	16/10/2023
P09	Updated S14- Client Comments & Planning	SR	SR	27/09/2023
P08	Client's comments	ZZ	SR	07/09/2023
P07	Stage 4 Issue	ZZ	SR	28/07/2023
P06	Reassign stats of gate to East of site	Key Amend	ZZ	06/07/2023
P05	Reassign stats of gate to East of site	ZZ	ZZ	03/07/2023
P04	East gate relocation	ZZ	SR	20/06/2023
P03	Key Amendments	ZZ	SR	06/06/2023
Rev	Description	Drawn	Checked	Date

**B**

**BOND BRYAN**

e info@bondbryan.co.uk  
w www.bondbryan.co.uk

**DfE**

**Orchards Academy**

Orchards Academy

**Access and Security Strategy**

Originator project ref <b>22237</b>	Purpose of Issue <b>For Information</b>
Scale(s) <b>1:500</b>	Revision description <b>PRELIMINARY</b>
Paper size <b>A1</b>	project originator volume level type role number <b>SRP1072-BBA-ZZ-00-D-L-1008</b>
	revision <b>P12</b>