

PROJECT: 1 Chestnut Close, London. N14 4SG


To Enfield Planning Department,

With regards to SuDS features on the site we have proposed the replacement of 25m² of grass with 15m² of permeable paving and 10m² of flower bed.

All existing front garden levels remain as existing, as well as existing drainage directions remain unchanged.

This proposed area of permeable paving and flower bed are indicated on the attached SuDS drawing P110.

The section detail of the SuDS permeable paving build-up is as follows:

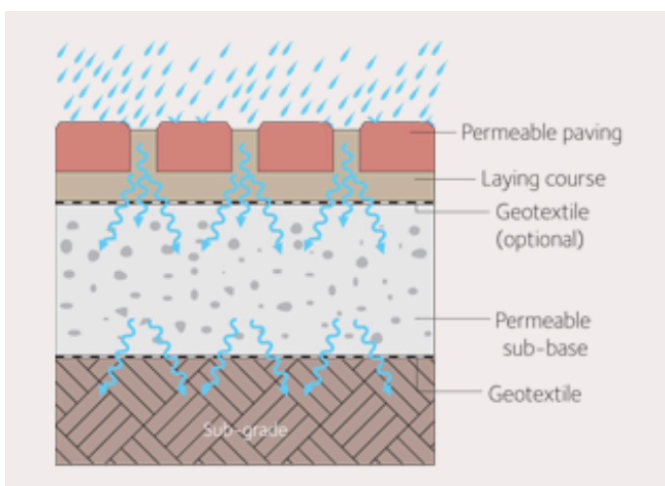

System A: Total infiltration

All water falling onto the pavement infiltrates down through the joints between the concrete blocks, passing through the constructed layers below and eventually into the sub-grade. The sub-base layer may act as a temporary storage device.

With regards to management of the SuDS feature and the existing gardens generally we propose the following management measures:

- Regular day to day care - litter collection, grass cutting (rear garden where grass remains)
- Occasional tasks - managing existing pond vegetation (rear garden existing pond)
- Remedial work - repairing damage where necessary

Mike Beacham

Beacham Architects Ltd
