


'No Dig' Construction / Ground Protection Detail

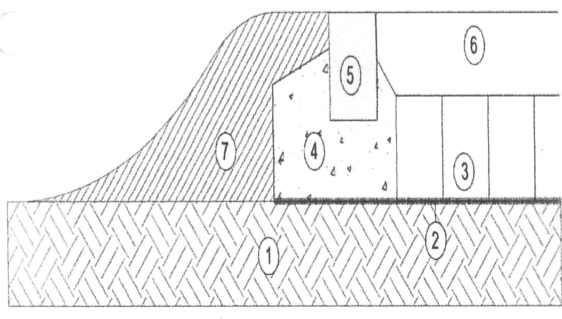

- 1 Existing ground cleared of vegetation by hand, ground levels left undisturbed
- 2 Terram Geotextile to prevent fill materials penetrating ground
- 3 Terram Geocell cellular confinement system filled with clean (no fines) inert stone material depth of system to be specified by engineer
- 4 Concrete footing and haunch
- 5 Kerb
- 6 Paved surface
- 7 Loose topsoil graded down to cover haunch and marry existing and proposed surfaces

Client	MR AND MRS H GODFREY	Scale:	1:500
Project:	PROPOSED GARAGE STORE BUILDING THE OLD RECTORY THE STREET STOWLANGTOFT SUFFOLK	Date:	JAN 2024
Drawing:	DETAILED PLANNING	Contract:	4633 Drg No. 01

BROWN & SCARLETT
ARCHITECTS
 1 Old Hall Barns, Thurston Road
 Pakenham, IP31 2NG
 Tel: 01284 768800
 info@brownandscarlett.co.uk