


Elevation 13 Old Quad north elevation 1:100@A1



Elevation 14 Old Quad east elevation 1:100@A1

- 01. Proposed frameless glass door within existing opening. Refer to 2313-PD-3005 (Typical glass entrance door details)
- 02. Proposed plant screen
 04. Window replaced with new timber slimline double glazed window. Configuration to match existing window.
- 05. Window replaced with new timber slimline double glazed window. Window configuration changed to 4 pane outward opening casement
- 06. Existing timber dormers replaced with new construction appearance to match existing. Parapet height increased by 80mm to allow for roof insulation. Insulation to be added to dormer cheeks. Secondary glazing to be integrated behind leaded windows.
- 07. Soil vent pipe terminal. Vent position to suit roof tiling.
- 08. Extract ventilation terminal. Vent position to suit roof tiling.
- 09. Roof void vent. Vent position to suit roof tiling.

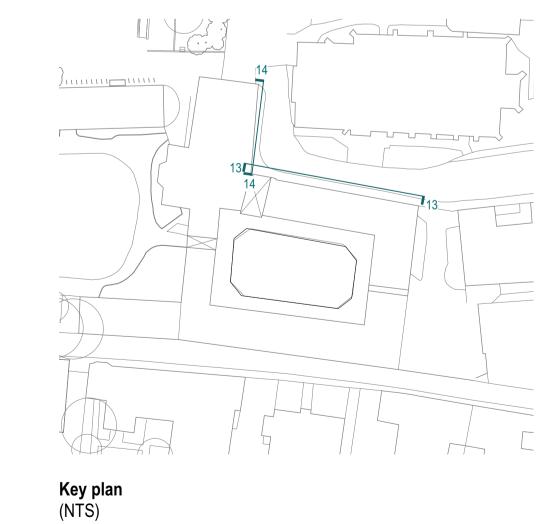

PLANNING

tes	Rev Date Amendment 15.03.24 Issued for Planning	WALTERS & COHEN ARCHITECTS		2 Wilkin Street London NW5 3NL	Te n	Telephone 020 7428 9751 mail@waltersandcohen.com
		Pembroke Colle	College Rokos and Old Quad Propo		Proposed Elevations 13 & 14	
		Checked by TL	Scale Date Drawn 1:100@A1 15.03.24	Job No. 2313	Drawing No. PD-1206	Revision