



SITE SAMPLES

Samples of red and grey brick and flint work to be constructed on site to demonstrate mortar and pointing.




1. Roof

Natural slates



EPDM



2. Render

Keim universal render
Off white



<https://www.keim.com/en-gb/products/renders/adhesive-renders/>



3. Red brick

Vandersanden Boreas

4.Windows

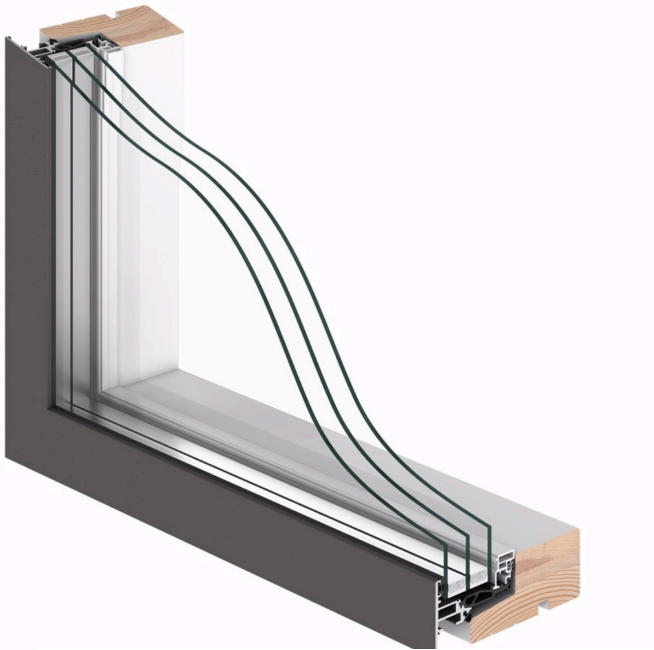


Timber frame/
aluminium
cladding triple
glazed windows

Velfac, Norrsken,
or similar
[https://products-
commercial.velfac.
co.uk/products/
18764/18781/195
80#p-34634](https://products-commercial.velfac.co.uk/products/18764/18781/19580#p-34634)

RAL 7032 -
pebble

Edge of window (fixed
timber section) set
84mm from finished
face of wall

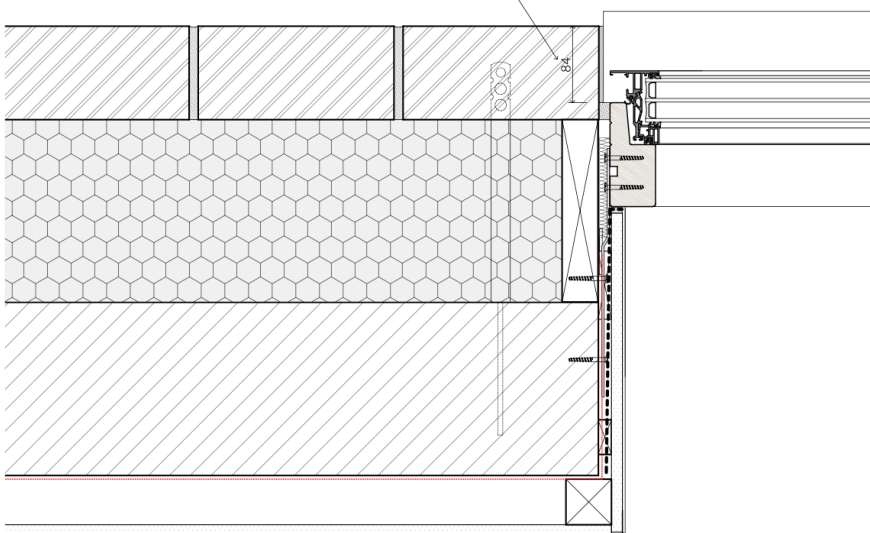

Wall detail -

100mm brick

100mm mineral wool

Triple glazed window

194mm insulated
frame (or
porotherm)

39mm service space

Internal plaster finish

A
21.001
EXTERNAL DETAILS
WINDOW JAMB IN BRICKWORK
SCALE 1:5



Timber/aluminium
triple glazed
windows used in an
extension /
refurbishment



5. Flint

Flint walling

6. Grey brick

Grey brick edging -
Vandersanden Majestic



7. Gutter -

Lindab coated steel square section in black

High quality, lightweight, robust gutter, suitable for installation over render and thick 200mm mineral wool insulation