
Items 3.3 – 3.13: curb work

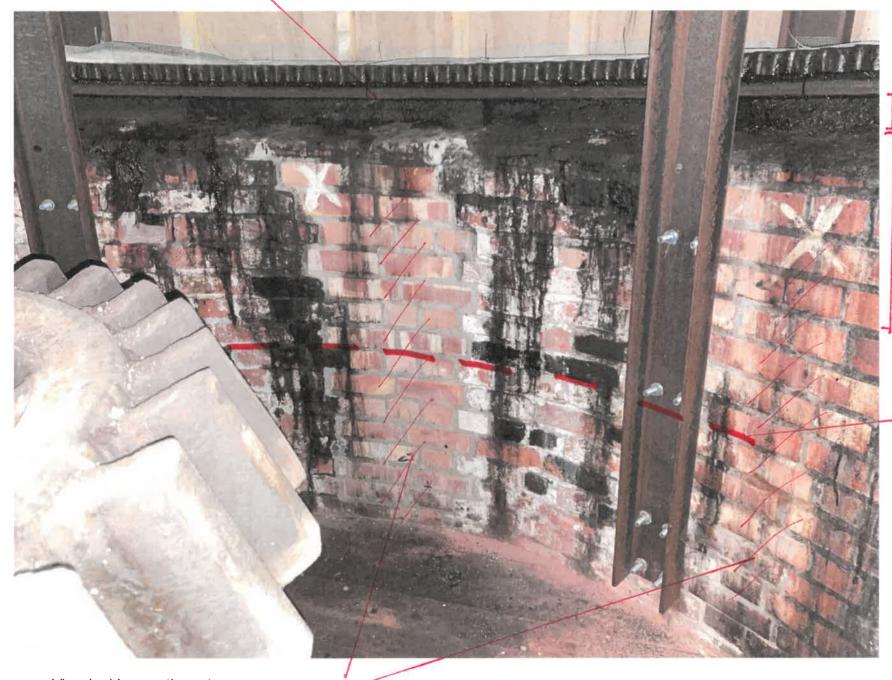

View looking south east

Item 10.19 walling over holding down bolts (6no): provisionally cut out the cement bedded brickwork inside at 5<sup>th</sup> floor level down to the 4<sup>th</sup> course below the 4<sup>th</sup> floor ceiling joist bearings to expose the holding down bolts for inspection or renewal.

Reinstate in red brick to match the existing walling, tooth into existing but bed and point in cement mortar as existing

Item 3.14 Curb brickwork: remove provisional 2 courses of brickwork above the existing offset and renew in handmade red clay brick in 1:3 Portland cement /graded sand mix to give early and reliable strength for new curb support. Cut brickwork to suit levels of remaining courses below and to give level bedding of the curb

Item 3.15 Tower top brickwork: dismantle and rebuild provisional 4 no. courses of brick from offset downwards as may be needed after removal of the curb etc. Rebed, form new holes for tie rods and recesses for the kerb support blocks as necessary all in 1:3 Portland cement /graded sand mix mortar, bond as existing

Item 10.20 5<sup>th</sup> floor brickwork: provisionally cut out and form 2m long stitch as item 10.5 on inner face of wall on east side

Client:	Lincolnshire County Council  Burgh le Marsh Windmill: repairs  5th floor curb and internal walling repairs				
Job Title:					
Drawing Title:					
Scale:	NTS @ A3	Drawn By:	PEO	Date:	November 2023
Job Number	6700/3	Drawing Number:	6		

## whitworth

Unit 12, Park Farm Business Centre Fornham St Genevieve Bury St Eamunds, IP28 6TS 01284 760421 info@whitworth.co.uk www.whitworth.co.uk

## NOTE

Do not scale from this drawing. Confirm all dimensions on site. Refer any discrepancies to the Architect before work is put in hand. Read this drawing in conjunction with the relevant sections of the specification, schedule of works and other drawings.

This drawing is copyright of whitworth