


WOLF

ALUMINIUM




Wolf BF—the ultimate system of bi folding doors is a modern, exclusive option that can be used in both residential and commercial buildings, terrace exits, Juliette balconies, show rooms, conference halls, business centres and hotels. Wolf BF has evolved into probably the best bi folding door system on the market, exclusive to Basfords.



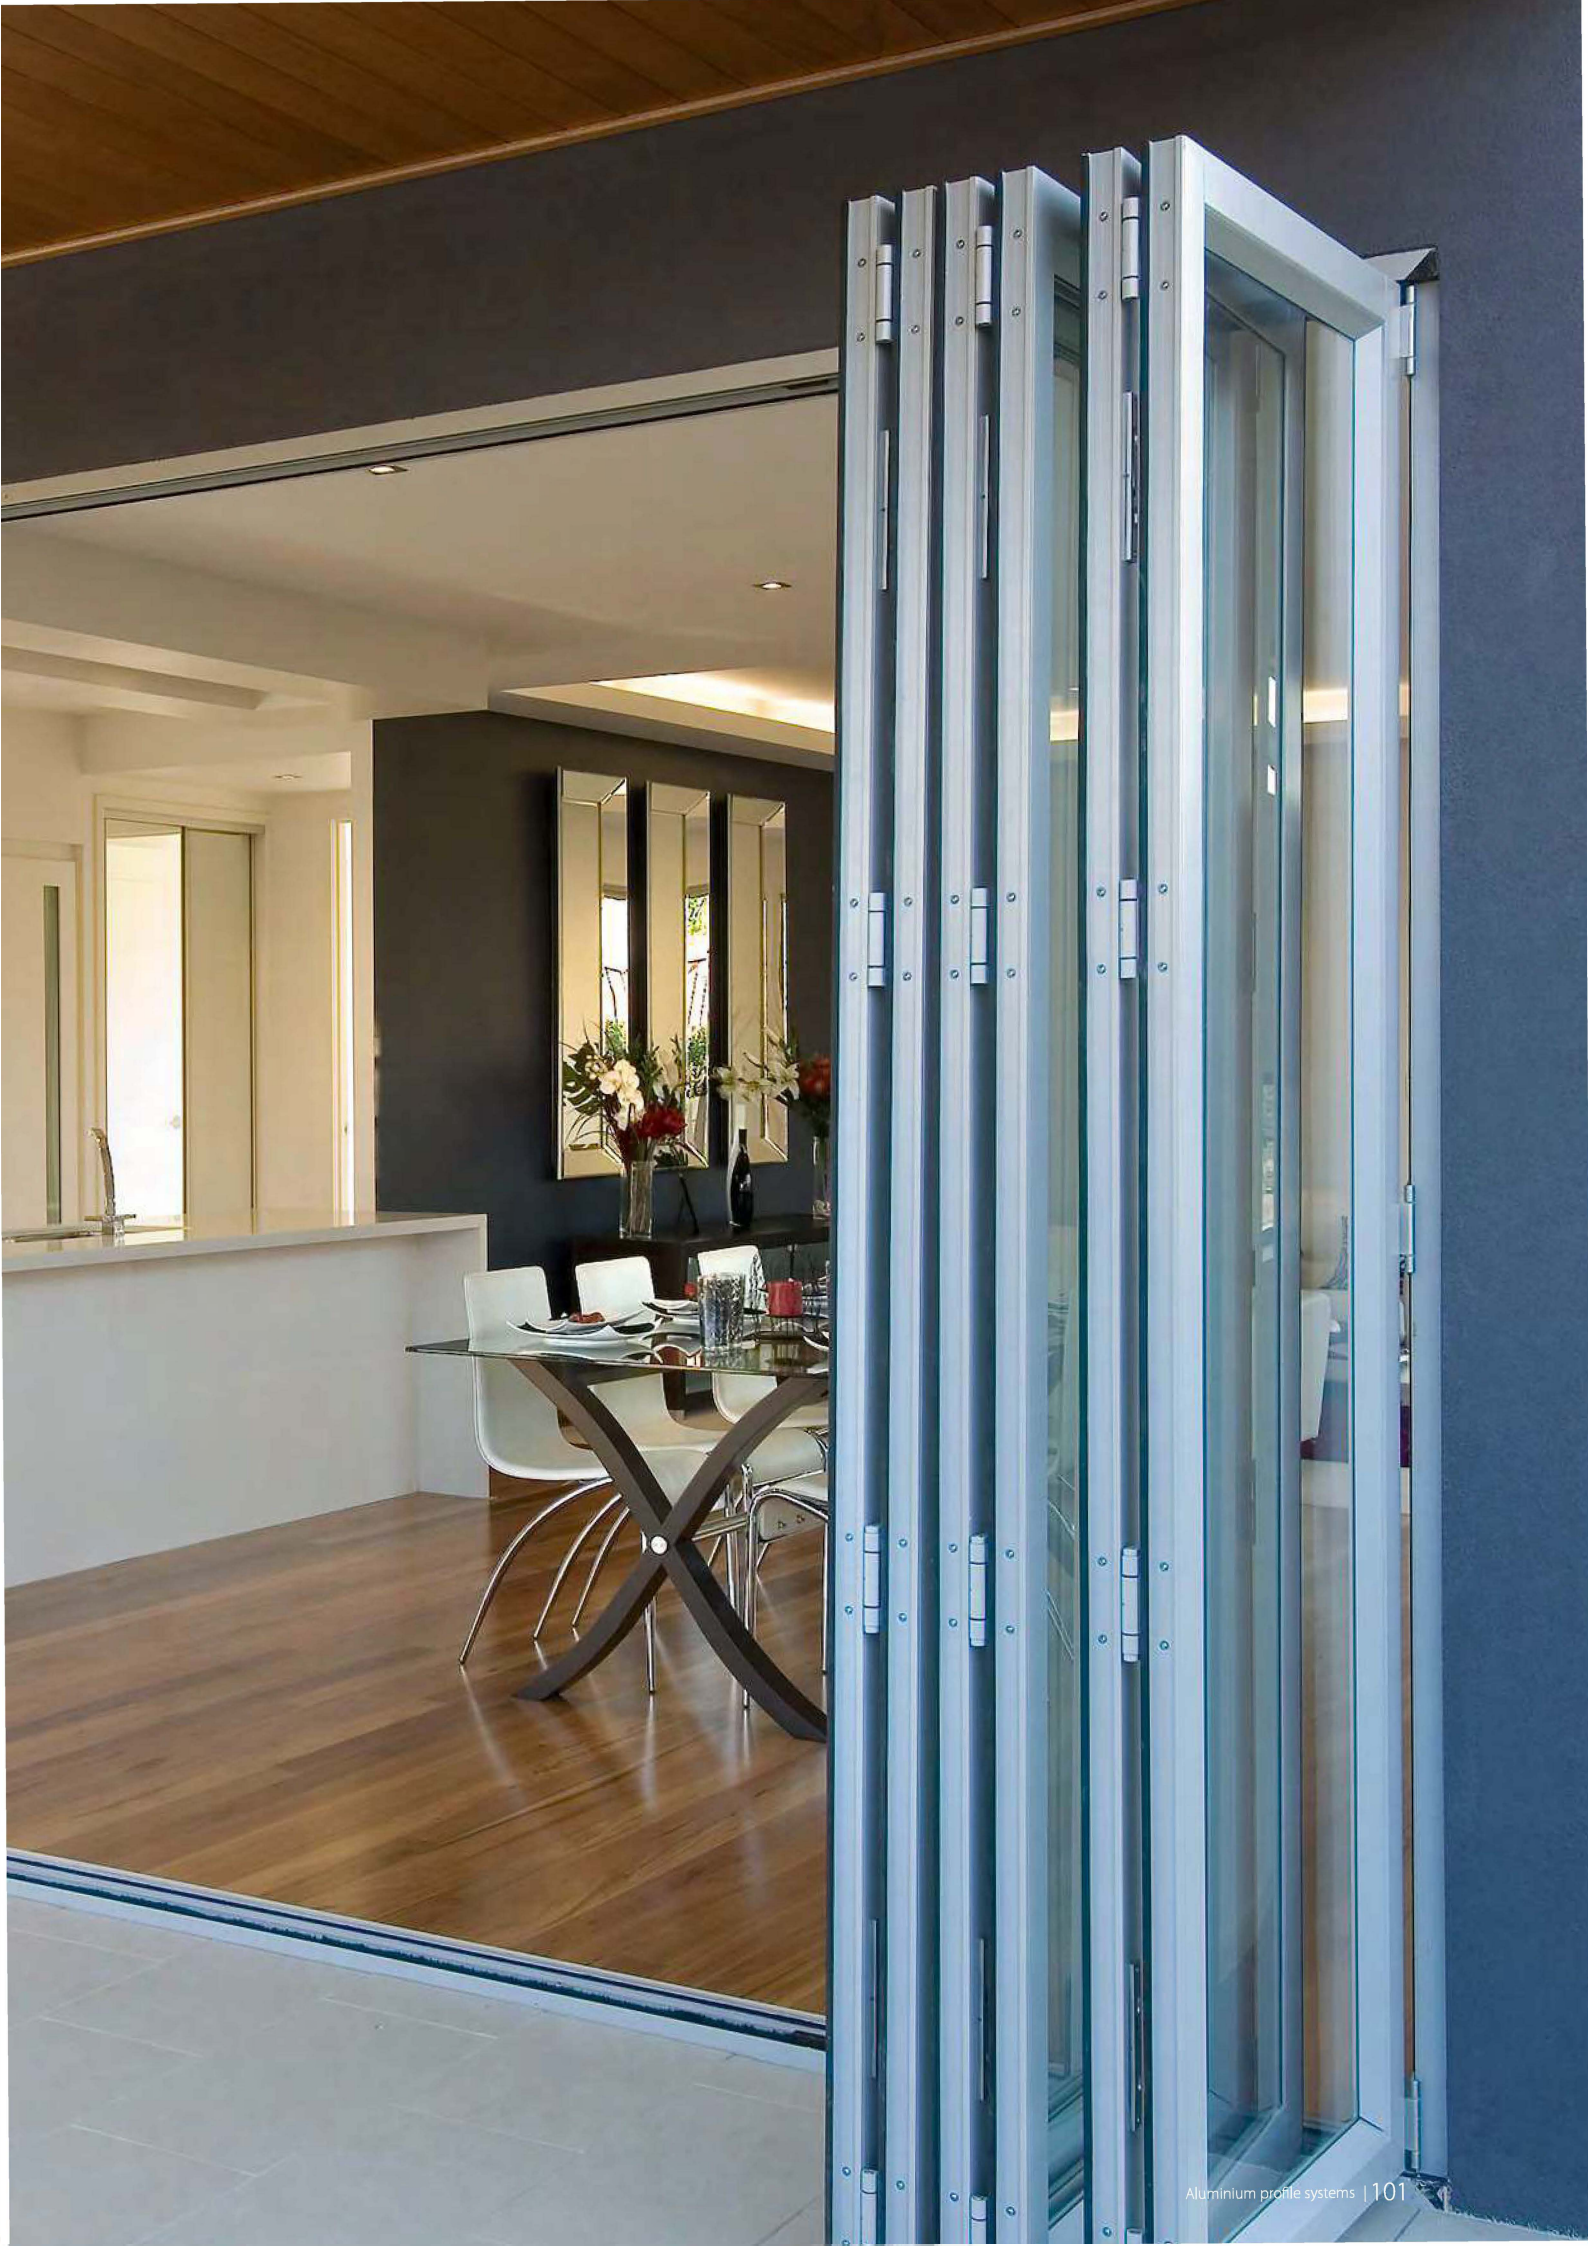

Wolf BF

Bi-folding door system

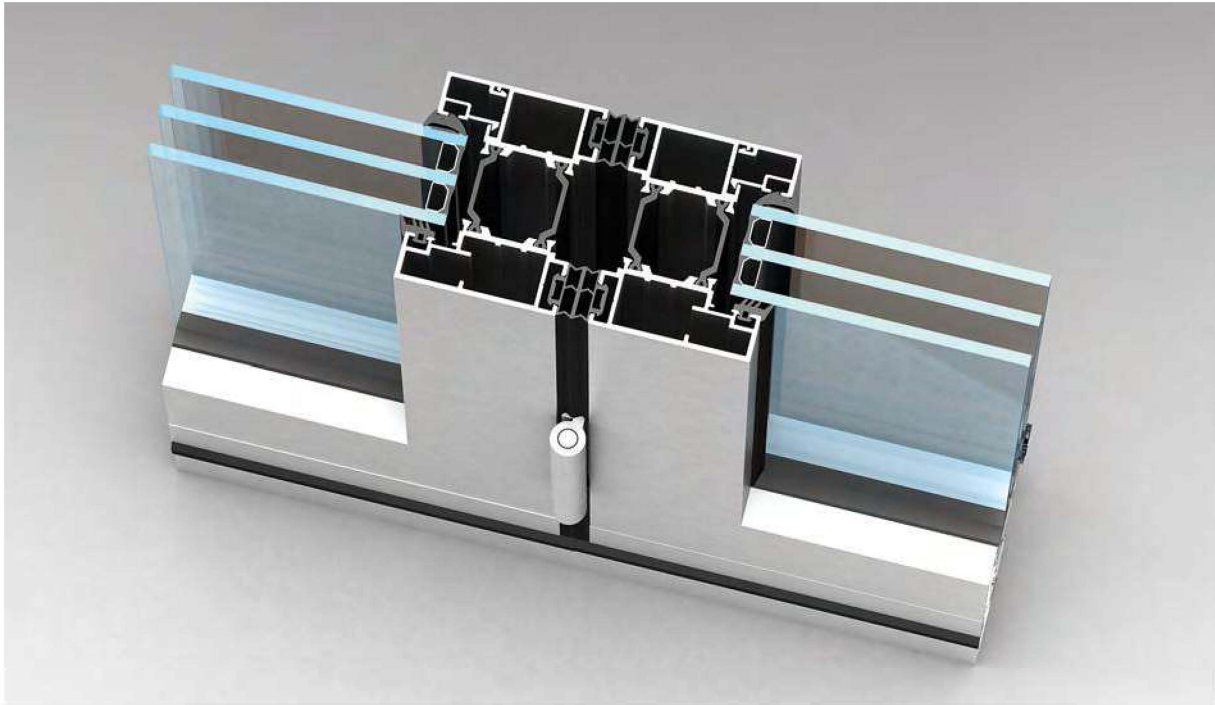

Product information

Max. leaf height	3000 mm
Max. leaf depth	1200 mm
Infill unit thickness	44 mm
Max. infill unit weight	120 kg
Water tightness in accordance with EN 1027:2000, EN 12208:1999	class 9A (600 Pa)
Air tightness in accordance with EN 1026:2000, EN 12207:1999	class 4 (600 Pa)
Wind load resistance in accordance with EN 12211:2000, EN 12210:1999	class A3 (1200)
Thermal insulation in accordance with EN ISO 10077-1:2007, EN ISO 10077-2:2012	$U_f \geq 1.4 \text{ W/m}^2\text{K}$
Impact resistance in accordance with EN 13049:2003	class 5
Acoustic insulation in accordance with EN ISO 10140-2:2011, EN ISO 10140-4:2011	43 dB
Burglar resistance	PAS 24:2012 (class DK)





WOLF 
ALUMINIUM