

# Part G Water Efficiency Calculation

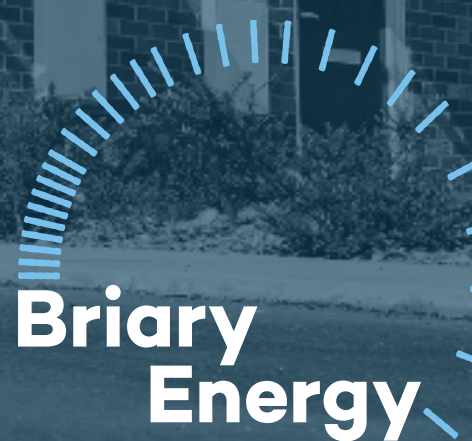
## Flat 3A - 12 Lind Road

---

David Barnard

PRJ012560

November 2023

The Briary Energy logo features the company name in a bold, white, sans-serif font. To the right of the text is a stylized graphic consisting of a semi-circle of short, white, vertical lines of varying lengths, creating a sunburst or energy-like effect.

**Briary  
Energy**

# Water Use Assessment Calculation Report

Certificate Ref: BE45259425

Issued: 01 November 2023

Flat 3A - 12 Lind Road

David Barnard

Performance Target: 110 (litres / person / day)

*Building Regulations Part G - 110l*

Number of Bedrooms: 1

Occupancy for Calculation Purposes: 2

Installation Type	Unit	Capacity/ Flow Rate	Use Factor	Fixed use (l/p/day)	Total Use (l/p/day)
WC's	Volume (l)	3.50	4.42	0.00	15.47
Taps Exc. Kitchen	Flow Rate	5.00	1.58	1.58	9.48
Baths	(l)	180.00	0.11	0.00	19.80
Showers	(l/s)	8.00	4.37	0.00	34.96
Kitchen Taps	(l/s)	8.00	0.44	10.36	13.88
Washing Machines	(l/kgdry)	8.17	2.10	0.00	17.16
Dishwashers	(l/place)	1.25	3.60	0.00	4.50
Waste Disposal	(l/s)				0.00
Water Softener	(l/s)				0.00
Total Calculated Water Use (l/p/day)					115.25
Grey/Rainwater Reused (l)					0.00
Normalisation Factor					0.91
Total Water Consumption (l/p/day)					104.88
External Water Use Allowance (l)					5.00
<b>Total Consumption Part G (l/p/day)</b>					<b>109.88</b>

Part G Reg Assessment Result **Pass ✓**

The calculation methodology uses the water consumption figures provided from manufacturers' product details. Where details have not been provided, assumed figures have been used to achieve compliance. These must be met in order to satisfy the Part G Calculation for Flat 3A - 12 Lind Road. The calculation methodology is to be used to assess compliance against the water performance targets in Regulation 36. It is not a design tool for water supply and drainage systems. It is also not capable of calculating the actual potable water consumption of a new dwelling. Behaviour and changing behaviour can also have an effect on the amount of potable water used throughout a home.

## Appliance/Usage Details

### Taps (Excluding Kitchen Taps)

Tap Fitting Type	Flow Rate Litres/Min	Quantity (No.)	Total per Fitting type
Bathroom sink mixer taps	5	1	5.00
Total No. of Fittings (No.)			1
Total Flow (l/s)			5.00
Maximum Flow (l/s)			5.00
Average Flow (l/s)			5.00
Weighted Average Flow (l/s)			3.50
Flow for Calculation (l/s)			5.00

### Showers

Shower fitting Type	Flow Rate Litres/Min	Quantity (No.)	Total per Fitting type
Shower	8	1	8.00
Total No. of Fittings (No.)			1
Total Flow (l/s)			8.00
Maximum Flow (l/s)			8.00
Average Flow (l/s)			8.00
Weighted Average Flow (l/s)			5.60
Flow for Calculation (l/s)			8.00

### Baths

Bath Type	Capacity to Overflow	Quantity (No.)	Total per Fitting type
Bath	180	1	180.00
Total No. of Fittings (No.)			1
Total Capacity (l)			180.00
Maximum Capacity (l)			180.00
Average Capacity (l)			180.00
Weighted Average Capacity (l)			126.00
Capacity for Calculation (l)			180.00

### WCs

WC Type	Full Flush Volume	Part Flush Volume	Quantity (No)
Dual flush toilet	4.5	3	1
Total number of fittings			1
Average effective flushing volume			3.50

### Dishwashers

Dishwasher Type	L per Place Setting	Quantity (No.)	Total per Fitting type
Dishwasher	1.25	1	1.25
Total No. of Fittings (No.)			1
Total Consumption (l)			1.25
Maximum Consumption (l)			1.25
Average Consumption (l/s)			1.25
Weighted Average Consumption (l)			0.88
Consumption for Calculation (l/s)			1.25

### Washing Machines

Washing Machine Type	L per Kg Dry Load	Quantity (No.)	Total per Fitting type
Washing Machine	8.17	1	8.17
Total No. of Fittings (No.)			1
Total Consumption (l)			8.17
Maximum Consumption (l)			8.17
Average Consumption (l/s)			8.17
Weighted Average Consumption (l)			5.72
Consumption for Calculation (l/s)			8.17

### Kitchen Taps

Tap Fitting Type	Flow Rate Litres/Min	Quantity (No.)	Total per Fitting type
Kitchen Tap	8	1	8.00
Total No. of Fittings (No.)			1
Total Flow (l/s)			8.00
Maximum Flow (l/s)			8.00
Average Flow (l/s)			8.00
Weighted Average Flow (l/s)			5.60
Flow for Calculation (l/s)			8.00

### Other Fittings

Waste Disposal Y/N	N
--------------------	---

### Water softener

Consumption beyond 4% l/p/d	
-----------------------------	--

### Use of grey water and harvested rainwater

Total Grey water from WHB taps (l)	
Total Available Grey Water Supply (l)	
Possible Demand (l)	
Grey/Rain Installed Capacity (l)	
Figure for Calculation lit/person/day	