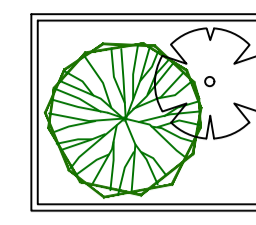
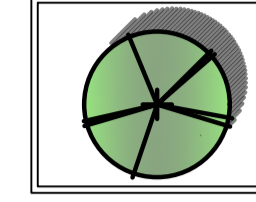
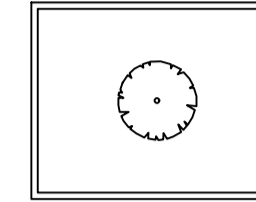



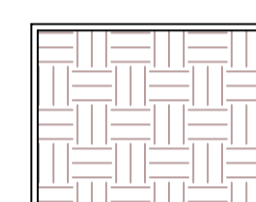

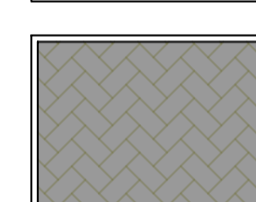
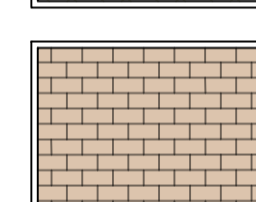
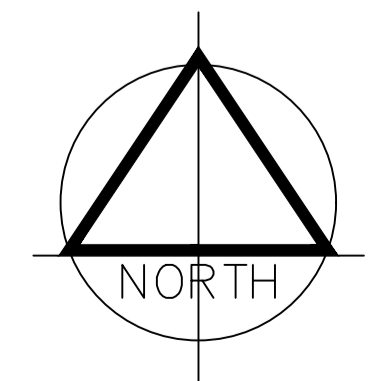




- KEY**
-  Existing trees retained
  -  Standard tree planting 12-14cm girth in 900mm diameter x 600mm deep tree pit with double staking
  -  Specimen shrub planting minimum 25L container, average 1-1.75m.
  -  Soft landscaped areas
  -  Meadow turf on 150mm depth of topsoil
  -  Existing vegetation to be retained and area to be re-seeded with a suitable bank side species mix
  -  30mm depth of topsoil to rear gardens
  -  Tarmac surfacing to vehicular standard specification
  -  Block paving surfacing to vehicular standard specification
  -  Unit paving to pedestrian specification around residential blocks

# Andrew Street, Compstall

## Landscape Masterplan



REVISIONS		
A	Amendments following revisions to layout and council car park arrangements.	SW 04.04.2023
B	Through road in car park removed.	LC 05.04.2023

Project ANDREW STREET, COMPSTALL				Scale See scale bar	
Title Landscape Masterplan				Drawing No. 2437_01	
Client Winworth Construction Limited				Status Construction	
Date December 2022	LAC	Checked DS	Revision B		
Stage 5					